

Title: **Herschel Instrument Power ON-OFF and Mode Switching Procedure for Functional Testing**

CI-No: 100000

Prepared by: S. Hamer (TERMA, A/S)  
S. Ilsen (TAS-F) Date: 18.12.2008

Checked by: for S. Idler D. Kopp 08.01.2009

Product Assurance: M. R. Stritter D. Hendry 08.01.09

Configuration Control: W. Wietbrock W. Wietbrock 08/01/09

Project Management: Dr. Fricke J. Koeber 8.1.2009

Approved by TAS-F: D. Montet D. Montet 08.01.09

Distribution: See Distribution List (last page)

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Issue	Date	Sheet	Description of Change	Release
1	07.01.2008		Initial version	
1.1	21.04.2008		Revised version covering all instruments including simulated science modes. HIFI ICU only configuration	
1.2	25.04.2008		Revised version HIFI "ICU only" plus HIFI Mode Transitions procedure	
1.3	28.07.2008		Minor corrections plus addition of emergency switchdown of instruments and OBCP recovery procedures	
			Changed PACS burst mode procedure to be able to select a configurable duration instead of the default 60 minutes.	
			Added chapter 7.3.9 HIFI Nominal Standby1 to Standby2 Added chapter 7.3.10 HIFI Nominal Standby2 to Standby1	
			Changed ALL_Subscribe script (NCR4181)	
			Added nominal instrument modes (chapter 1.4)	
2	13.10.2008		SPR697 fixed (chapter 7.1.7) Update chapter 7.1.1 & 7.2.1 & 7.3.1 to include time synchronisation check with IEGSE Update chapter 7.3.2 and 7.3.4 to include NCR4181 prompts for table load and table read Update chapter 7.1.1, 7.2.1 and 7.3.1 to add automatic time check between IEGSE and CCS. Also added instrument temperature logging script. Update chapter 7.3.2 and 7.3.4 to add disable LO in ambient conditions Update Layout	
3	18.12.2008		New Emergency procedures based on OBCPs Update chapter 7.1.2 and 7.1.4 - remove AFO prompt for PACS power ON primary and redundant. Include additional prompt for enabling temperature autonomy function. Add chapter 7.7 – Instrument FDIR Enable/Disable Add chapter 7.8 – Instrument MTL Enable/Disable Update chapter 8 – script hierarchy Added 7.2.8 to 7.2.11 – Power ON/OFF SPIRE to/from REDY mode (SPT)	

## Table of Content

<b>Table of Content</b>	<b>3</b>
<b>1 Scope</b>	<b>7</b>
1.1 Objective	7
1.2 Constraints	7
1.3 Operational Flow	8
1.4 General Mode Flow	10
1.4.1 SPIRE	10
1.4.2 PACS	10
1.4.3 HIFI	11
<b>2 Documents/Drawings</b>	<b>12</b>
2.1 Applicable Documents	12
2.2 Reference Documents	12
2.3 Other Documents	13
2.4 Acronyms	13
<b>3 Requirements to be verified</b>	<b>14</b>
<b>4 Configuration</b>	<b>15</b>
4.1 Herschel S/C Configuration	15
4.1.1 Hardware Configuration	15
4.1.2 Software Configuration	15
4.1.3 Test Configuration	15
4.1.3.1 SVM	15
4.1.3.2 HIFI	15
4.1.3.3 PACS	15
4.1.3.4 SPIRE	15
4.1.4 Simulated Equipments	15
<b>5 Conditions</b>	<b>16</b>
5.1 Personnel	16
5.2 Environmental	16

5.3	General Precautions and Safety	16
5.3.1	General Safety Requirements, Precautions	16
5.3.2	Special condition and hazards	16
5.3.2.1	HIFI	16
5.3.2.2	PACS	17
5.3.2.3	SPIRE	18
5.3.3	ESD constraints	18
5.3.4	Special QA Requirements	19
5.4	GSE	20
5.4.1	MGSE	20
5.4.2	CVSE	20
5.4.3	EGSE	20
5.4.3.1	EGSE Hardware Configuration	20
5.4.3.2	EGSE User Software	20
5.4.3.3	Grounding Configuration	20
5.4.3.4	Test Equipment	20
5.4.3.5	Data Acquisition System	20
5.4.4	OGSE	20
5.4.5	Special Equipment	20
<b>6</b>	<b>Verification Requirements and Test Criteria</b>	<b>21</b>
<b>7</b>	<b>Step-by-Step Procedures</b>	<b>22</b>
7.1	PACS Instrument Procedures	22
7.1.1	PACS I-EGSE Configuration/Connection	22
7.1.2	PACS Prime OFF to Standby (SAFE)	24
7.1.3	PACS Prime Standby (SAFE) to OFF	26
7.1.4	PACS Redundant OFF to Standby (SAFE)	27
7.1.5	PACS Redundant Standby (SAFE) to OFF	30
7.1.6	PACS Standby (SAFE) to Nominal Spectroscopy (to Standby)	31
7.1.7	PACS Standby (SAFE) to Burst Mode (to Standby)	32
7.1.8	PACS to Standby (SAFE)	34
7.1.9	PACS I-EGSE Disconnection	34
7.2	SPIRE Instrument Procedures	36
7.2.1	SPIRE I-EGSE Configuration/Connection	36
7.2.2	SPIRE Prime OFF to Standby (REDY)	37
7.2.3	SPIRE Prime Standby (REDY) to OFF	40
7.2.4	SPIRE Redundant OFF to Standby (REDY)	41
7.2.5	SPIRE Redundant Standby (REDY) to OFF	43
7.2.6	SPIRE Standby (REDY) to Simulated Science (OPS)	45

7.2.7	SPIRE Simulated Photometer Science (OPS) to Standby (REDY)	46
7.2.8	SPIRE Power ON Nominal (Switch OFF to REDY - SPT)	47
7.2.9	SPIRE Power OFF Nominal (Switch REDY to OFF - SPT)	50
7.2.10	SPIRE Power ON Redundant (Switch OFF to REDY - SPT)	53
7.2.11	SPIRE Power OFF Redundant (Switch REDY to OFF - SPT)	56
7.2.12	SPIRE I-EGSE Disconnection	58
7.3	HIFI Instrument Full Configuration Procedures	60
7.3.1	HIFI I-EGSE Configuration/Connection	60
7.3.2	HIFI Nominal OFF to Standby1	61
7.3.3	HIFI Nominal Standby1 to OFF	66
7.3.4	HIFI Redundant OFF to Standby1	67
7.3.5	HIFI Redundant Standby1 to OFF	72
7.3.6	HIFI Nominal Standby1 to Science (PRIME)	74
7.3.7	HIFI Nominal Science (PRIME) to Standby1	75
7.3.8	HIFI I-EGSE Disconnection	76
7.3.9	HIFI Nominal Standby1 to Standby2	76
7.3.10	HIFI Nominal Standby2 to Standby1	78
7.4	HIFI Instrument ICU Only Configuration Procedures	79
7.4.1	HIFI Nominal OFF to ICU ON	79
7.4.2	HIFI Nominal ICU ON to OFF	80
7.4.3	HIFI Redundant OFF to ICU ON	82
7.4.4	HIFI Redundant ICU ON to OFF	83
7.4.5	HIFI Nominal ICU ON to Simulated Science	85
7.4.6	HIFI Nominal Simulated Science (PRIME) to ICU ON	85
7.5	Instrument FDIR Recovery Procedures	87
7.5.1	PACS FDIR Recovery	87
7.5.2	SPIRE FDIR Recovery	88
7.5.3	HIFI FDIR Recovery	88
7.6	Instrument Emergency OFF Procedures	90
7.6.1	By OBCP	90
7.6.1.1	PACS EMERGENCY SWITCH OFF (valid for Primary and Redundant)	90
7.6.1.2	SPIRE EMERGENCY SWITCH OFF (valid for Primary and Redundant)	92
7.6.1.3	HIFI EMERGENCY SWITCH OFF (Primary only!)	92
7.6.1.4	HIFI EMERGENCY SWITCH OFF (Redundant only!)	93
7.6.2	By Ground Procedure	95
7.6.2.1	PACS NOMINAL EMERGENCY SWITCH OFF	95
7.6.2.2	PACS REDUNDANT EMERGENCY SWITCH OFF	96
7.6.2.3	SPIRE NOMINAL EMERGENCY SWITCH OFF	96
7.6.2.4	SPIRE REDUNDANT EMERGENCY SWITCH OFF	99
7.6.2.5	HIFI NOMINAL EMERGENCY SWITCH OFF	102

7.6.2.6	HIFI REDUNDANT EMERGENCY SWITCH OFF	104
7.7	Instrument FDIR Enable/Disable	105
7.7.1	PACS disable FDIR	106
7.7.2	PACS enable FDIR	106
7.7.3	SPIRE disable FDIR	107
7.7.4	SPIRE enable FDIR	107
7.7.5	HIFI disable FDIR	107
7.7.6	HIFI enable FDIR	108
7.8	Instrument MTL Enable/Disable	109
7.8.1	PACS disable MTL	109
7.8.2	SPIRE disable MTL	110
7.8.3	HIFI disable MTL	110
7.8.4	HIFI enable MTL	111
7.8.5	HIFI clear MTL	111
<b>8</b>	<b>ANNEX - Script hierarchy</b>	<b>113</b>
8.1	General	113
8.2	PACS	113
8.3	SPIRE	115
8.4	HIFI Full Configuration	116
8.5	HIFI ICU Configuration	117
8.6	Procedure Variation Summary	118
8.7	Non Conformance Report (NCR/SPR) Summary	119
8.8	Sign-off Sheet	120

## 1 Scope

### 1.1 Objective

This document details the Instrument (PACS, SPIRE & HIFI) procedures provided to support primarily SVM oriented IST activities. The procedures can also be used where appropriate to support other non-specific instrument tests (e.g. EMC, shipping health check). The procedures cover the following basic activities:

- Instrument (Prime & Redundant) Switch ON/OFF to/from Standby\* mode
- Configuration of, and connection to, the Instrument EGSEs (I-EGSEs)
- Transition from “Standby” to a simulated\*\* Science producing mode

\* “Standby” is an artificial mode which cannot be characterised by one particular parameter for any instrument. Each instrument also uses an alternative name to indicate “Standby” mode; for PACS this is SAFE and for SPIRE it is REDY, HIFI has two standby modes Standby1 & Standby2, the primary difference between the two is whether the lasers are switched ON (2) or OFF (1).

\*\* Simulated Science is sufficient for the needs of non-specific instrument IST activities and is representative in terms of APID allocation and bandwidth but not data content.

This document will, where necessary, evolve during the system level AIT activities in order to reflect the configuration of the instruments (completion of integration activities) and the Herschel satellite (the latter in order to handle operation of the instruments in warm, Hel and Hell conditions)

### 1.2 Constraints

The instrument procedures are designed to be run without the need for Instrument specific support, and for PACS, SPIRE plus HIFI ICU only without need of connection to the I-EGSEs.

For HIFI full configuration (the so called “Mode Transitions”) connection to the HIFI I-EGSE is required, as is support from SRON personnel (latter TBC).

However, it is mandatory for any PACS usage that PACS OBCPs/EATs have been loaded and are enabled for the duration of the test.

HIFI and SPIRE currently do not require OBCPs/EATs to be operational; however the test itself may require this, but is not a constraint for the instruments.

### 1.3 Operational Flow

Chapter 7 provides the detailed step-by-step procedures for each instrument, which are summarised below:

#### PACS

- I-EGSE Configuration & Connection
- PACS Prime OFF to Standby (SAFE)
- PACS Prime Standby (SAFE) to OFF
- PACS Redundant OFF to Standby (SAFE)
- PACS Redundant Standby (SAFE) to OFF
- PACS Standby (SAFE) to Nominal Spectroscopy (to Standby)
- PACS Standby (SAFE) to Burst Mode (to Standby)
- I-EGSE Disconnection

#### SPIRE

- I-EGSE Configuration & Connection
- SPIRE Prime OFF to Standby (REDY)
- SPIRE Prime Standby (REDY) to OFF
- SPIRE Redundant OFF to Standby (REDY)
- SPIRE Redundant Standby (REDY) to OFF
- SPIRE Standby to OPS (Simulated Photometer)
- SPIRE OPS to Standby
- I-EGSE Disconnection

#### HIFI Full Configuration (I-EGSE Mandatory)

- I-EGSE Nominal/Redundant Configuration & Connection
- HIFI Nominal OFF to Standby1
- HIFI Nominal Standby1 to OFF
- HIFI Nominal Standby1 to PRIME (Science)
- HIFI Nominal PRIME (Science) to Standby1
- HIFI Redundant OFF to Standby1




- HIFI Redundant Standby1 to OFF
- I-EGSE Disconnection
  
- **HIFI ICU Configuration (without I-EGSE)**
- HIFI Nominal ICU ON
- HIFI Nominal ICU OFF
- HIFI Redundant ICU ON
- HIFI Redundant ICU OFF
- HIFI Start Simulated Science
- HIFI Stop Simulated Science

### 1.4 General Mode Flow


Below an overview of the different instrument modes (not all are displayed).

The transition from one mode to the next can be performed by following the chapters in this document. The chapter number is in the scheme.


#### 1.4.1 SPIRE

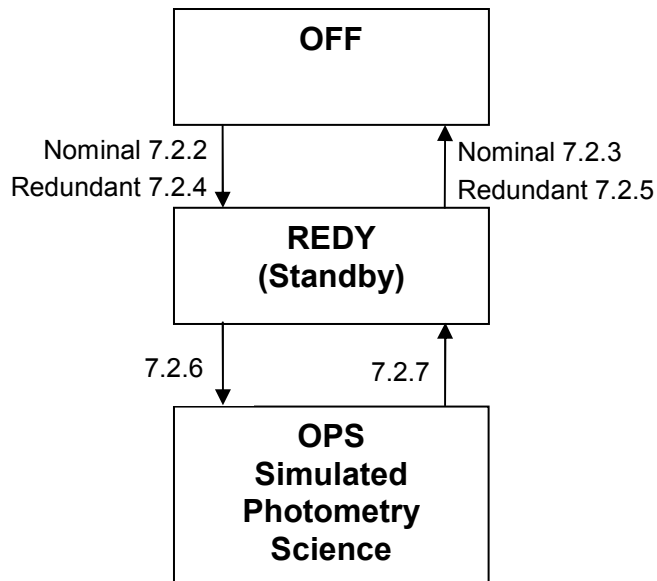

#### 1.4.2 PACS

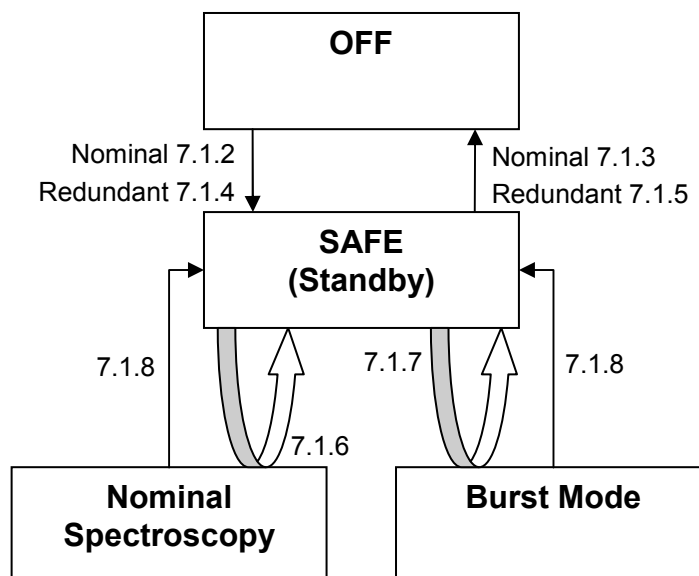

1.4.3 HIFI

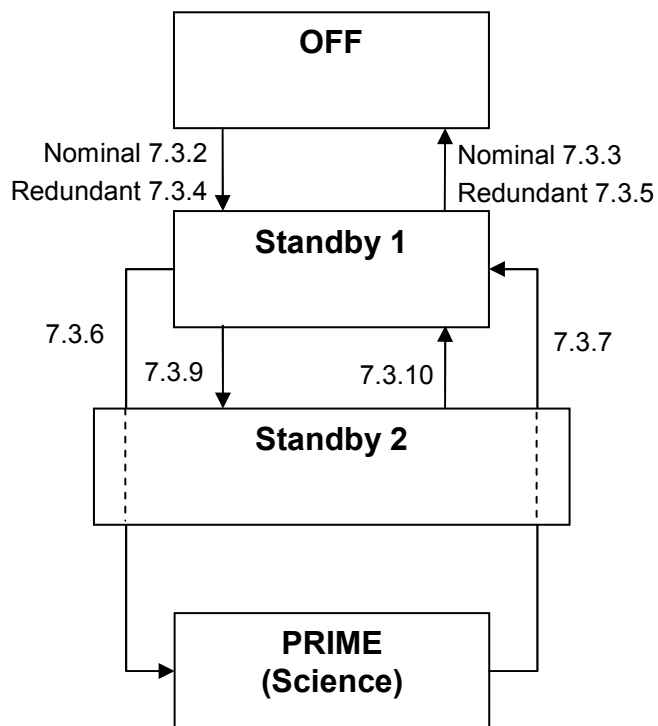

## 2 Documents/Drawings

This document incorporates, by dated or undated references, provisions from other publications. These normative references are cited at appropriate places in the text and publications are listed hereafter. For dated references, subsequent amendments to or revisions of any of these apply to this document only when incorporated into it by amendment or revision. For undated references, the latest edition of the publication referred to apply.

### 2.1 Applicable Documents

AD-1	Herschel SAT Emergency Switch Off Procedure	H-P-2-ASED-PR-0071
AD-2	Procedure for setup and operation of the HIFI cooling system	HP-2-ASED-PR-0125

### 2.2 Reference Documents

RD-1	Herschel PCDU & CDMS nominal switch on / off procedure	HP-2-ASED-PR-0070
RD-2	HIFI Switch On Procedure, Issue 1.16	SRON-G/HIFI/PR/2007-017
RD-3	PACS Switch On/Off, ref. email Helmut Feuchtgruber	17. April 2007 11:58
RD-4	SPIRE Integration System Test Debugging Procedures, Issue 1.3	SPIRE-RAL-PRC-002880
RD-5	PACS I-EGSE User Manual, Issue 1, 19-Jul-2007	PICC-ME-MN-010
RD-6	HIFI IEGSE setup procedure	SRON-U/HIFI/PR/2007-005
RD-7	SPIRE I-EGSE Set-Up, Issue 2.2	SPIRE-RAL-DOC-002841
RD-8	FIRST/PLANCK Instrument Interface Document part A	PT-IID-A-04624
RD-9	FIRST/PLANCK Instrument Interface Document part B (HIFI)	PT-IIDB/HIFI-02125
RD-10	FIRST/PLANCK Instrument Interface Document part B (PACS)	PT-IIDB/PACS-02126
RD-11	FIRST/PLANCK Instrument Interface Document part B (SPIRE)	PT-IIDB/SPIRE-02124

RD-12 LO SFT Procedure using LO Dummy, Issue 1.01

MPIfR/HIFI/PR/2006-565

RD-13 HIFI Mode Transitions Procedure, Iss 1.16

SRON-G/HIFI/PR/2007-020

### 2.3 Other Documents

N/A

### 2.4 Acronyms

See calling procedure

### 3 Requirements to be verified

N/A

## **4 Configuration**

### **4.1 Herschel S/C Configuration**

#### **4.1.1 *Hardware Configuration***

See relevant TRR MoM

#### **4.1.2 *Software Configuration***

See relevant TRR MoM

#### **4.1.3 *Test Configuration***

##### **4.1.3.1 SVM**

See relevant TRR MoM

##### **4.1.3.2 HIFI**

All warm units & FPU integrated. For this issue (1.1) Hel/Hell conditions can be supported but LOU must be warm.

If LOU is cold (i.e. for TB/TV) then this procedure must be updated according to RD2 & RD13.

##### **4.1.3.3 PACS**

All warm units and FPU is integrated and connected to the warm units. Warm or Cold Hel/Hell conditions.

##### **4.1.3.4 SPIRE**

All warm units integrated. Warm or Cold Hel/Hell conditions.

#### **4.1.4 *Simulated Equipments***

N/A

## 5 Conditions

### 5.1 Personnel

See relevant TRR MoM

### 5.2 Environmental

See relevant TRR MoM

### 5.3 General Precautions and Safety

#### 5.3.1 *General Safety Requirements, Precautions*

- For HIFI, Handling precautions according to RD-8 and RD-9 are applicable.
- For PACS, Handling precautions according to RD-8 and RD-10 are applicable.
- For SPIRE, Handling precautions according to RD-8 and RD-11 are applicable.

#### 5.3.2 *Special condition and hazards*

The following Operational restrictions shall be carefully taken into account:

- In case of any failure, the activities shall be stopped until troubleshooting plan is generated and approved.

A general constraint for all instrument DPUs (or ICU in the case of HIFI), there shall be a 5 minute wait between switching off a DPU/ICU and switching it back on again.

##### 5.3.2.1 HIFI

None when powering on/off HIFI ICU only as per sections 7.4.1 to 0.

When operating HIFI using the full configuration, ref. sections 0 to 7.3.7 the following applies:

- 1) Connection/Disconnection with the HIFI I-EGSE is required as per section 7.3.1 & 0.
- 2) The following Cryo temperature limits shall be observed when operating HIFI:



S/C Environmental	Limits	Actual
Cryostat Connection (Valves)	N/A	
Cryostat Status (Hel/Hell)	N/A	
Cryostat Level 0 Temp (T107 - CCUB)	<20K	
Cryostat Level 1 Temp (T231-T237 - CCUB)	<20K	
Cryostat Level 2 Temp (T207 read from CryoSCOPE)	<=40K	
Cryostat Level 3 Temp	N/A	

3) The following shall be observed if HIFI is commanded to “Standby1” mode or above:

If switched on the WBS laser temperature (HM023193 HWH\_Laser\_T and HWV\_Laser\_T) may rise above a red limit (30degC) in the MIB. If this occurs the test can continue, but the time of occurrence should be logged. If the temperature rises to 35degC the lasers will be automatically switched off by the instrument.

It is recommended to start active cooling of the HIFI panel see AD-2 before the WBS laser temperatures reach 30degC to avoid “HIGH HIGH” alarms being reported repeatedly and unnecessarily by the HPCCS.

NB: If temperature trend is rising during the test then Cooling on HIFI panel may need to be adjusted (ref. AD-2).

### 5.3.2.2 PACS

Prior to switching ON PACS, PACS specific OBCPs & EATs shall be loaded and enabled on the CDMU. Note: the PACS power on scripts (ref. sections 7.1.2 & 0) will prompt for confirmation of this before allowing the operator to continue with power on of the instrument.

CDMU must be in AFO mode for the duration of PACS operations. Note this maybe extended to all instruments in the future.

Note during power off of PACS FDIR may be triggered due to expected (5,2) events being reported from PACS DPU. To avoid this PACS specific OBCPs are disabled for the duration of the power down sequence, and then re-enabled.

Connection of the PACS I-EGSE is not mandatory, however if MPE (PACS responsible) want to monitor the test from the I-EGSE then sections 7.1.1 & 7.1.9 apply.

#### 5.3.2.3 SPIRE

Connection of the SPIRE I-EGSE is not mandatory, however if RAL (SPIRE responsible) want to monitor the test from the I-EGSE then sections 7.2.1 & 7.2.12 apply.

#### **5.3.3 ESD constraints**

See the Lead Procedure for the test concerned and the following:

- For HIFI, ESD precautions according to RD-8 and RD-9 are applicable.
- For SPIRE according to nominal ESD protection
- For PACS according to nominal ESD protection

**5.3.4 Special QA Requirements**

N/A

**5.4 GSE**

**5.4.1 MGSE**

N/A

**5.4.2 CVSE**

N/A

**5.4.3 EGSE**

5.4.3.1 EGSE Hardware Configuration

See TRR MoM for test concerned.

5.4.3.2 EGSE User Software

See TRR MoM for test concerned.

5.4.3.3 Grounding Configuration

N/A

5.4.3.4 Test Equipment

N/A

5.4.3.5 Data Acquisition System

N/A

**5.4.4 OGSE**

N/A

**5.4.5 Special Equipment**

N/A

## 6 Verification Requirements and Test Criteria

No specific requirements are verified by this procedure, it is purely acts as a supporting procedure to the main lead test procedure where the overall test criteria and verification requirements are defined.

## 7 Step-by-Step Procedures

### 7.1 PACS Instrument Procedures

#### 7.1.1 PACS I-EGSE Configuration/Connection

The following procedure is NOT normally required for switching PACS ON or OFF.

It is only used when it is required to use the PACS I-EGSE to support the test being performed, either for monitoring of PACS specific TM on the IEGSE.

It is also required when performing PACS FDIR OBCP IST.

This procedure is independent of PACS redundancy configuration.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	If not already on, Switch on & configure PACS I-EGSE i.a.w. <b>RD-5</b>					
2.	From HPCCS Test Conductor console issue command to connect to PACS I-EGSE  <b>connect HPACSEGSE</b>	YZS28940== CONNECTED		<b>AND: SYS_PARS</b>		
3.	<i>Perform the following two steps if command parameter exchange is required between the IEGSE and HPCCS for the test concerned.</i>					
4.	Run the following script to make sure that the CCS-IEGSE communication is optimal. <b>This is only needed when after PACS power ON, PACS instrument tests will be performed! This should not be done if PACS is only set to a simulated science mode. In case HIFI_ALL_SubscribeParams.tcl or SPIRE_ALL_SubscribeParams.tcl is already running, terminate them first!</b>  <b>PACS_ALL_SubscribeParams</b>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	Make sure that PACS_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
6.	Verify correct connection and time synchronisation with IEGSE:  Y102999ETVT035_ASDGEN_VERPACSIEGSE	OK				
7.	If not running already, start the instrument temperature logging script: Z102999SCVT025_ASDGEN_INSTTEMP_LOG.tcl In the GUI, Enable the TM monitor of all instruments that are powered on	OK				
	<b>Return to calling Procedure</b>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.1.2 PACS Prime OFF to Standby (SAFE)**

The following will switch ON and configure PACS Prime instrument in SAFE mode in any satellite configuration (i.e. warm, or Cold Hel/Hell). HKTM packets will be generated on APIDs 1152 dec and 1154 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at any one time).

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs: 1152, 1154	OK				
2.	From the HPCCS test conductor console start the test script to power PACS Prime to SAFE:  <b>Z102999SCVT010_ASDGEN_PACSPWRON_P</b>					
3.	On HPCCS when prompted: "FM PACS Switch ON in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"	YES				
4.	On HPCCS when prompted: " PACS FDIR OBCPs/EATs loaded and enabled? - If not select NO to abort TS"	YES				
5.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
6.	If <b>YES</b> is selected the test script will go on to automatically power on all PACS warm units, force boot the DPU ASW and configure the instrument to SAFE (Standby mode)					
7.	On HPCCS when all autonomous actions have been completed by the power on script <b>P102999SCVT905_ASDISTPACS_PWR_ON_N</b> it will prompt:  "Set Bus Profile Back to Original Setting?"  Select <b>YES</b> if it is likely that other non-PACS instrument related activities are to be performed, otherwise select <b>NO</b> .					
8.	If <b>YES</b> selected the original Bus Profile will be restored.	OK				

Enter Date   Time:		Sign Off   TD:		PA:		Test Location:	
--------------------	--	----------------	--	-----	--	----------------	--



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
	<p>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby, in which case the following prompt will appear:</p> <p>“Bus Profile left unchanged, as original setting 0 (Launch)”</p> <p>Otherwise the following prompt will appear: “Bus Profile set back to original setting”</p> <p>If prompted select <b>OK</b> to continue</p>					
9.	<p>If <b>NO</b> selected then at the prompt: “Bus Profile left unchanged”</p> <p>Select <b>OK</b> to continue</p>	OK				
10.	Verify HK TM packets are being received on APIDs 1152 & 1154	OK				
11.	<p>Either using the ANDs indicated verify the correct status of the following PACS specific TM parameters or if the IEGSE is connected request IEGSE Operator to confirm that PACS is in SAFE mode:</p> <p style="text-align: center;"><b>DM_BOL_REC_PAC (PM038420)</b> is incrementing</p>	Incrementing		AND: PA019420		
12.	<p>Check if PM404410 &amp; PM405410 &gt; -15.0 degC. If so, press OK at the prompt: "Press OK to enable BOLC monitoring when PM404410 &amp; PM405410 &gt; -15.0 degC"</p> <p>If temperatures are NOK, continue with test/master and click OK when PM404410 &amp; PM405410 &gt; -15.0 degC</p>	OK				
13.	The script will automatically terminate	OK				
	<b>PACS in SAFE mode. Return to calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.1.3 PACS Prime Standby (SAFE) to OFF**

The following procedure will switch PACS Prime from SAFE to OFF.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF PACS Prime from SAFE:  <b>Z102999SCVT011_ASDGEN_PACSPWROFF_P</b>					
2.	On HPCCS when prompted: "FM PACS Switch OFF in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all PACS warm units.					
5.	Note: During switch off of PACS (5,2) TM event packets are expected	(5,2) events observed				
6.	On HPCCS when all autonomous actions have been completed by the power off script <b>P102999SCVT906_ASDISTPACS_PWR_OFF_N</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	Select <b>YES</b> if it is likely that other non-PACS instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
8.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
9.	On HPCCS stop Packet History displays for the following APIDs:1152,1154	OK				
	<b>PACS OFF.</b> <b>Return to calling Procedure</b>	OK				

**7.1.4 PACS Redundant OFF to Standby (SAFE)**

The following will switch ON and configure PACS Redundant instrument in SAFE mode in any satellite configuration (i.e. warm, or Cold: Hel/Hell). HKTM packets will be generated on APIDs 1153 dec and 1155 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at any one time).

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
----------	-----------------------	---------------	--------------	---------	---	---

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1153,1155	OK				
2.	From the HPCCS test conductor console start the test script to power PACS Redundant to SAFE:  <b>Z102999SCVT012_ASDGEN_PACSPWRON_R</b>					
3.	On HPCCS when prompted: "FM PACS Switch ON in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"	YES				
4.	On HPCCS when prompted: " PACS FDIR OBCPs/EATs loaded and enabled? - If not select NO to abort TS"	YES				
5.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
6.	If <b>YES</b> is selected the test script will go on to automatically power on all PACS redundant warm units, force boot the DPU ASW and configure the instrument to SAFE (Standby mode).					
7.	On HPCCS when all autonomous actions have been completed by the power on script <b>P102999SCVT907_ASDISTPACS_PWR_ON_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"  Select <b>YES</b> if it is likely that other non-PACS instrument related activities are to be performed, otherwise select <b>NO</b> .					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
8.	<p>If <b>YES</b> selected the original Bus Profile will be restored.</p> <p><i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby, in which case the following prompt will appear:</i></p> <p>“Bus Profile left unchanged, as original setting 0 (Launch)”</p> <p>Otherwise the following prompt will appear: “Bus Profile set back to original setting”</p> <p>If prompted select <b>OK</b> to continue</p>	OK				
9.	<p>If <b>NO</b> selected then at the prompt:</p> <p>“Bus Profile left unchanged”</p> <p>Select <b>OK</b> to continue</p>	OK				
10.	Verify HK TM packets are being received on APIDs 1153 & 1155					
11.	<p>Either using the ANDs indicated verify the correct status of the following PACS specific TM parameters or if the IEGSE is connected request IEGSE Operator to confirm that PACS is in SAFE mode:</p> <p style="text-align: center;"><b>DM_BOL_REC_PAC (PM038420)</b> is incrementing</p>	Incrementing		AND: PA019420		
12.	<p>Check if PM404410 &amp; PM405410 &gt; -15.0 degC. If so, press OK at the prompt: "Press OK to enable BOLC monitoring when PM404410 &amp; PM405410 &gt; -15.0 degC"</p> <p>If temperatures are NOK, continue with test/master and click OK when PM404410 &amp; PM405410 &gt; -15.0 degC</p>	OK				
13.	The script will automatically terminate	OK				
	<b>PACS in SAFE mode. Return to calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.1.5 PACS Redundant Standby (SAFE) to OFF**

The following procedure will switch PACS Redundant from SAFE to OFF.

Note that during PACS switch-off, OBCPs for PACs are disabled and re-enabled at the end to avoid unwanted triggering of FDIR.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF PACS Redundant from SAFE:  <b>Z102999SCVT013_ASDGEN_PACSPWROFF_R</b>					
2.	On HPCCS when prompted:  "FM PACS Switch OFF in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all PACS Redundant warm units.					
5.	Note: During switch off of PACS (5,2) TM event packets are expected	(5,2) events observed				
6.	On HPCCS when all autonomous actions have been completed by the power off script <b>P102999SCVT908_ASDISTPACS_PWR_OFF_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	<p>Select <b>YES</b> if it is likely that other non-PACS instrument related activities are to be performed.</p> <p><i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i></p> <p>“Bus Profile left unchanged, as original setting 0 (Launch)”</p> <p>Otherwise the following prompt will appear: “Bus Profile set back to original setting”</p> <p>If prompted select <b>OK</b> to continue</p>	OK				
8.	<p>If <b>NO</b> selected then at the prompt:</p> <p>“Bus Profile left unchanged”</p> <p>Select OK to continue</p>	OK				
9.	On HPCCS stop Packet History displays for the following APIDs:1153,1155	OK				
	<b>PACS OFF.</b> <b>Return to calling Procedure</b>	OK				

**7.1.6 PACS Standby (SAFE) to Nominal Spectroscopy (to Standby)**

Running the following procedure will configure PACS from SAFE to Simulated Nominal Spectroscopy for a period of 14400 seconds. The test script will autonomously return PACS to SAFE after the allotted time.

Notes:

- 1) HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

- 2) If PACS is switched off autonomously the script will remain running in the background, in which case it can be terminated manually.
- 3) If it is required to stop science data production before the allotted duration the script can be terminated manually and the SAFE mode procedure executed as per section 7.1.8.

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put PACS in simulated Nominal Spectroscopy from SAFE:  <b>P102999SCVT904_ASDGENPACS_NomSpect</b>					
2.	On HPCCS when prompted:  "FM PACS Simulate Spectroscopy for test in ANY conditions - abort TS if not correct "  Press YES					
3.	PACS in Simulated Nominal Spectroscopy for 60 mins.			If it is required to return PACS to SAFE before the script completes it is possible to abort the script and then perform section 7.1.8.		
<b>Return to or synchronise with calling Procedure</b>						

### 7.1.7 PACS Standby (SAFE) to Burst Mode (to Standby)

Running the following procedure will configure PACS from SAFE to Simulated Burst mode for a configurable period of seconds (default period is 60 minutes). The test script will autonomously return PACS to SAFE after the allocated time.

Notes:

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



- 1) HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.
- 2) If PACS is switched off autonomously the script will remain running in the background, in which case it can be terminated manually.
- 3) If it is required to stop science data production before the allotted duration the script can be terminated manually and the SAFE mode procedure executed as per section 7.1.8.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
4.	From the HPCCS test conductor console start the test script to put PACS in simulated Nominal Spectroscopy from SAFE:  <b>P102999SCVT913_ASDGENPACS_BurstMode</b>					
5.	On HPCCS when prompted:  "FM PACS Burst Mode for tests in ANY conditions – abort TS if not correct "  Press YES					
6.	On HPCCS when prompted:  "Enter burst mode duration in seconds: (default is 3600) "  Enter the value for the duration of burst mode in seconds.  <b><i>Be careful: the value should be an integer! If nothing is filled in, or the value is not a valid integer, then the default period of 3600 seconds will be used!</i></b>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	PACS in Simulated Burst mode for the selected period (default 60 mins).			If it is required to return PACS to SAFE before the script completes it is possible to abort the script and then perform section 7.1.8.		
8.	On HPCCS when prompted: "Is the data flow finished ?"  Check VC TM dump file and press OK.					
	<b>Return to or synchronise with calling Procedure</b>					

**7.1.8 PACS to Standby (SAFE)**

Running the following procedure will configure PACS to SAFE from Simulated Burst or Science mode.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put PACS into SAFE (Standby) mode from either simulated Burst or Science mode:  <b>PACS_SAFE_Mode</b>			Ensure that PACS Prime Bus Profile is still selected		
	<b>Return to or synchronise with calling Procedure</b>					

**7.1.9 PACS I-EGSE Disconnection**

This procedure is only used if the complementary connection procedure has been performed previously. For most IST activities envisaged it is not required.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From HPCCS Test Conductor console issue command to disconnect PACS I-EGSE  <b>disconnect HPACSEGSE</b>	YZS28940= DISCONNECTED		<b>AND: SYS_PARS</b>		
2.	From the HPCCS test conductor console terminate the test script:  <b>PACS_ALL_SubscribeParams</b>					
	<b>Return to calling Procedure</b>					

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

**7.2 SPIRE Instrument Procedures**

**7.2.1 SPIRE I-EGSE Configuration/Connection**

The following procedure is NOT normally required for switching SPIRE ON or OFF.

It is only used when it is required to use the SPIRE I-EGSE to support the test being performed, either for monitoring of SPIRE specific TM on the IEGSE.

This procedure is independent of SPIRE redundancy configuration.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	If not already on, Switch on & configure SPIRE I-EGSE i.a.w. RD-7					
2.	From HPCCS Test Conductor console issue command to connect to SPIRE I-EGSE  <b>connect HSPIREEGSE</b>	YZS29940= CONNECTED		<b>AND SYS_PARS</b>		
3.	<i>Perform the following two steps if command parameter exchange is required between the IEGSE and HPCCS for the test concerned.</i>					
4.	Run the following script to make sure that the CCS-IEGSE communication is optimal. <b>This is only needed when after SPIRE power ON, SPIRE instrument tests will be performed! This should NOT be done if SPIRE is only set to a simulated science mode. In case HIFI_ALL_SubscribeParams.tcl or PACS_ALL_SubscribeParams.tcl is already running, terminate them first!</b>  <b>SPIRE_ALL_SubscribeParams</b>					
5.	Make sure that SPIRE_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
6.	Verify correct connection and time synchronisation with IEGSE:  <b>Y102999ETVT036_ASDGEN_VERSPIREIEGSE</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	<b>If not running already, start the instrument temperature logging script:</b> <b>Z102999SCVT025_ASDGEN_INSTTEMP_LOG.tcl</b> In the GUI, Enable the TM monitor of all instruments that are powered on	OK				
	<b>Return to calling Procedure</b>					

### 7.2.2 SPIRE Prime OFF to Standby (REDY)

The following will switch ON and configure SPIRE Prime instrument in REDY (Standby) mode. HKTM packets will be generated on APIDs 1280 dec and 1282 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

During power on of SPIRE a number of soft/hard OOLs are reported due to the sequential switch on of the units. This is expected and will clear when SPIRE is in REDY mode. When in REDY mode one parameter remains OOL (soft) namely SMD2V505 this is also expected.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1280,1282	OK				
2.	From the HPCCS test conductor console start the test script to power SPIRE Prime to REDY:  <b>Z102999SCVT004_ASDGEN_SPIREPWRON_P</b>					
3.	On HPCCS when prompted: "SPIRE Switch ON for IST activities in any conditions - Select NO to abort TS if not correct"	YES				
4.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					

Enter Date   Time:		Sign Off   TD:		PA:		Test Location:	
--------------------	--	----------------	--	-----	--	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	If <b>YES</b> is selected the test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW and configure the instrument to REDY (Standby mode).					
6.	On HPCCS when all autonomous actions have been completed by the power on script <b>S102999SCVT017_ASDGENSPIR_PWR_ON_P</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
7.	Select <b>YES</b> if it is likely that other non-SPIRE instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
8.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
9.	Verify HK TM packets are being received on APIDs 1280 & 1282					
10.	Either using the ANDs indicated verify the correct status of the following SPIRE specific TM parameters or if the IEGSE is connected request IEGSE Operator to confirm that:  THSK (SM00T500) parameter refreshing @ 0.25 Hz	OK		<b>AND: SA_1_559</b>		

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
	TM1N and TM2N parameters are incrementing as indicated:  TM1N (SMT0N500) by 2 every 4 secs TM2N (SMT1N500) by 1 every 4 secs  MODE parameter is set to "REDY" mode (RAW value 0x0200)	OK  SM00M500 = 0x0200 (REDY)				
	<b>SPIRE powered and in REDY mode</b> <b>Return to calling Procedure</b>					

Enter Date   Time:			Sign Off	TD:	PA:	Test Location:	
--------------------	--	--	----------	-----	-----	----------------	--

**7.2.3 SPIRE Prime Standby (REDY) to OFF**

The following procedure will switch SPIRE Prime from REDY to OFF.

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime from REDY:  <b>Z102999SCVT005_ASDGEN_SPIREPWROFF_P</b>	OK				
2.	On HPCCS when prompted:  "SPIRE Switch OFF for IST activities in any conditions - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all SPIRE warm units.					
5.	During Switch OFF of SPIRE the following (5,1) and (5,4) event messages on APID 1280 are expected and do not indicate a problem:  a) EVID 1313 No_MCU_Response_Error b) EVID 21773 ALARM_LSMCU_DEAD					
6.	On HPCCS when all autonomous actions have been completed by the power off script <b>S102999SCVT019_ASDGENSPIR_PWR_OFF_P</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	Select <b>YES</b> if it is likely that other non-SPIRE instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
8.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
9.	On HPCCS stop Packet History displays for the following APIDs:1280,1282	OK				
	<b>SPIRE OFF.</b> <b>Return to calling Procedure</b>					

**7.2.4 SPIRE Redundant OFF to Standby (REDY)**

The following will switch ON and configure SPIRE Redundant instrument in REDY (Standby) mode. HKTM packets will be generated on APIDs 1281 dec and 1283 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

During power on of SPIRE a number of soft/hard OOLs are reported due to the sequential switch on of the units. This is expected and will clear when SPIRE is in REDY mode. When in REDY mode one parameter remains OOL (soft) namely SMD2V505 this is also expected.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1281,1283	OK				
2.	From the HPCCS test conductor console start the test script to power SPIRE Prime to REDY:  <b>Z102999SCVT006_ASDGEN_SPIREPWRON_R</b>					
3.	On HPCCS when prompted:  "SPIRE Switch ON for IST activities in any conditions - Select NO to abort TS if not correct"	YES				
4.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
5.	If <b>YES</b> is selected the test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW and configure the instrument to REDY (Standby mode).					
6.	On HPCCS when all autonomous actions have been completed by the power on script <b>S102999SCVT018_ASDGENSPIR_PWR_ON_R</b> it will prompt:  <i>"Set Bus Profile Back to Original Setting?"</i>					
7.	Select <b>YES</b> if it is likely that other non-SPIRE instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
8.	If <b>NO</b> selected then at the prompt: "Bus Profile left unchanged"  Select OK to continue	OK				
9.	Verify HK TM packets are being received on APIDs 1281 & 1283					
10.	Either using the ANDs indicated verify the correct status of the following SPIRE specific TM parameters or if the IEGSE is connected request IEGSE Operator to confirm that:  THSK (SM00T500) parameter refreshing @ 0.25 Hz  TM1N and TM2N parameters are incrementing as indicated:  TM1N (SMT0N500) by 2 every 4 secs TM2N (SMT1N500) by 1 every 4 secs  MODE parameter is set to "REDY" mode (RAW value 0x0200)	OK  OK  SM00M500 = 0x0200 (REDY)		<b>AND: SA_1_559</b>		
	<b>SPIRE powered and in REDY mode Return to calling Procedure</b>					

**7.2.5 SPIRE Redundant Standby (REDY) to OFF**

The following procedure will switch SPIRE Redundant from REDY to OFF.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF PACS Redundant from REDY:  <b>Z102999SCVT007_ASDGEN_SPIREPWROFF_R</b>	OK				
2.	On HPCCS when prompted:  "SPIRE Switch OFF for IST activities in any conditions - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all SPIRE warm units.					
5.	During Switch OFF of SPIRE the following (5,1) and (5,4) event messages on APID 1281 are expected and do not indicate a problem:  c) EVID 1313 No_MCU_Response_Error d) EVID 21773 ALARM_LSMCU_DEAD					
6.	On HPCCS when all autonomous actions have been completed by the power off script <b>S102999SCVT020_ASDGENSPIR_PWR_OFF_R</b> it will prompt:  <i>"Set Bus Profile Back to Original Setting?"</i>					
7.	Select <b>YES</b> if it is likely that other non-SPIRE instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
8.	If <b>NO</b> selected then at the prompt: "Bus Profile left unchanged"  Select OK to continue	OK				
9.	On HPCCS stop Packet History displays for the following APIDs:1281,1283	OK				
	<b>SPIRE OFF.</b> <b>Return to calling Procedure</b>					

**7.2.6 SPIRE Standby (REDY) to Simulated Science (OPS)**

Running the following procedure will configure SPIRE from REDY to Simulated Simulated PhotometerScience (OPS) mode.

Note HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put SPIRE in simulated science from REDY:  <b>Z102999SCVT008_ASDGEN_SPIRESTBY2OPS</b>					
2.	On HPCCS when prompted:  "Command SPIRE from REDY to OPS mode in any conditions - Select NO to abort TS if not correct"  Select YES	YES				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
3.	On HPCCS when prompted: "Bus profile left as SPIRE PRIME while in OPS mode - OK to continue"  Select OK	OK				
	<b>Return to or synchronise with calling Procedure</b>	OK				

**7.2.7 SPIRE Simulated Photometer Science (OPS) to Standby (REDY)**

Running the following procedure will return SPIRE to REDY (Standy) from Simulated Simulated Photometer Science (Ops) mode.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put SPIRE in REDY from simulated Science:  <b>Z102999SCVT009_ASDGEN_SPIREOPS2STBY</b>					
2.	On HPCCS when prompted: "Command SPIRE from OPS to REDY mode in any conditions - Select NO to abort TS if not correct"  Select YES	YES				
3.	On HPCCS when prompted: "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"  Select OK	OK				

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>
---------------------------	--	-----------------	------------	------------	-----------------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
	Return to or synchronise with calling Procedure	OK				

**7.2.8 SPIRE Power ON Nominal (Switch OFF to REDY - SPT)**

This procedure requires a connected SPIRE IEGSE. Make sure chapter 7.2.1 has been completed successfully.

Step-No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
	<b>SPIRE: OFF</b>						
1.	Verify the following TCS baseplate temperature for SPIRE Warm Units before switching ON: <b>HSDCU (DEA88710)</b>	> -30°C & < +45 °C					
2.	On HPCCS start Packet History displays for the following APIDs:1280,1282	OK					
3.	From the HPCCS test conductor console start the test script to power on SPIRE Prime: <b>S102999SCVT027_ASPTSPTSPIR_PWR_ON_P</b>	OK			AND: ZAD07999, ZAD14999 MIM: LCL_HERSCHEL		

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
4.	On HPCCS when prompted:  "SPIRE Switch ON for SPTs in Hel/Hell conditions ONLY - Select NO to abort TS if not correct"  <b>Select YES</b>	YES					
5.	The test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW (from secondary partition) and configure the instrument to Standby mode. Reply to prompts as indicated below.						
6.	On HPCCS when prompted: "Check Telemetry Updating Correctly and OBT is Consistent with CDMU - OK to continue" <b>Select OK</b>	OK			<b>AND: SA_1_559</b>		
7.	If I-EGSE connected when prompted on HPCCS, perform check requested then <b>select OK:</b> "Check IEGSE Time Consistent - OK to continue when RAL confirm"	OK					
8.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK	Not refreshing					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
	Select OK to continue	TM2N Not incrementing OK					
9.	On HPCCS when prompted: "Check Telemetry Updating Correctly - OK to continue" Check that parameters:  Select OK to continue	THSK TM2N Refreshing @ 1Hz Incrementing by 1 @ 1Hz OK			<b>AND: SA_1_559</b>		
10.	On HPCCS , the script S102999SCVT027_ASDSPTSPIR_PWR_ON_P will prompt: "Do you want to load the SPIRE monitoring table and start monitoring?" Check with SPIRE and click YES or NO	YES/NO					
11.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT027_ASDSPTSPIR_PWR_ON_P it will prompt: "Set Bus Profile Back to Original Setting?" Select NO	NO					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
12.	At the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK					
13.	Verify HK TM packets are being received on APIDs 1280 & 1282	OK					
14.	On authorisation of SPIRE responsible execute the following test script:  SPIRE-IST-SPTMONITORING	OK					
15.	Verify the following TCS baseplate temperature for SPIRE Warm Units before operating SPIRE:  HSDCU (DEA88710)	> -15°C & < +45°C					
	<b>SPIRE: DPU &amp; DRCU powered and in REDY mode (nom.)</b>						

**7.2.9 SPIRE Power OFF Nominal (Switch REDY to OFF - SPT)**

This procedure requires a connected SPIRE IEGSE. Make sure chapter 7.2.1 has been completed successfully.

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
	<b>SPIRE: in Standby (REDY) (nom.)</b>						

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime: <b>S102999SCVT028_ASDSPTSPIR_PWR_OFF_P</b>	OK					
2.	On HPCCS when prompted:  "SPIRE Switch OFF for SPTs in Hel/Hell conditions ONLY - Select NO to abort TS if not correct"  <b>Select YES</b>	YES					
3.	If <b>YES</b> is selected the test script will go on to automatically power off all SPIRE warm units.						
4.	During Switch OFF of SPIRE the following (5,2) and (5,4) event messages on APID 1280 may be expected and do not indicate a problem:  EVID 1313 No_MCU_Response_Error EVID 21773 ALARM_LSMCU_DEAD						

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
5.	On HPCCS , the script S102999SCVT028_ASDSPTSPIR_PWR_OFF_P will prompt: "Was the monitoring started during SPIRE power ON?" If unsure, check YES. The command to stop monitoring might fail if the monitoring was not started, this is OK.	YES					
6.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK Not refreshing TM2N Not incrementing				AND: SA_1_559		
7.	Select OK to continue	OK					
8.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT028_ASDSPTSPIR_PWR_OFF_P it will prompt: "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"						
9.	Select OK to continue	OK					
10.	On HPCCS stop Packet History displays for the following APIDs:1280,1282	OK					
<b>SPIRE: OFF</b>							

Enter Date   Time:		Sign Off   TD:		PA:		Test Location:	
--------------------	--	----------------	--	-----	--	----------------	--

**7.2.10 SPIRE Power ON Redundant (Switch OFF to REDY - SPT)**

This procedure requires a connected SPIRE IEGSE. Make sure chapter 7.2.1 has been completed successfully.

Step-No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
<b>SPIRE: OFF</b>							
1.	Verify the following TCS baseplate temperature for SPIRE Warm Units before switching ON:  <b>HSDCU (DEA88710)</b>	> -30°C & < +45 °C					
2.	On HPCCS start Packet History displays for the following APIDs:1281,1283	OK					
3.	From the HPCCS test conductor console start the test script to power on SPIRE Redundant: <b>S102999SCVT029_ASPTSPTSPIR_PWR_ON_R</b>	OK			AND: ZAD07999, ZAD14999 MIM: LCL_HERSHEL		
4.	On HPCCS when prompted:  "SPIRE Switch ON for SPTs in Hel/Hell conditions ONLY - Select NO to abort TS if not correct"  <b>Select YES</b>	YES					

Enter Date   Time:			Sign Off	TD:	PA:	Test Location:	
--------------------	--	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
5.	The test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW (from primary partition) and configure the instrument to Standby mode. Reply to prompts as indicated below.						
6.	On HPCCS when prompted: "Check Telemetry Updating Correctly and OBT is Consistent with CDMU - OK to continue" <b>Select OK</b>	OK			AND: SA_1_559		
7.	If I-EGSE connected when prompted on HPCCS, perform check requested then <b>select OK</b> : "Check IEGSE Time Consistent - OK to continue when RAL confirm"	OK					
8.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK Not refreshing TM2N Not incrementing  Select OK to continue						
9.	On HPCCS when prompted: "Check Telemetry Updating Correctly - OK to continue" Check that parameters:  THSK Refreshing @ 1Hz				AND: SA_1_559		

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
	TM2N Select OK to continue	Incrementing by 1 @ 1Hz OK					
10.	On HPCCS , the script S102999SCVT029_ASDSPTSPIR_PWR_ON_R will prompt: "Do you want to load the SPIRE monitoring table and start monitoring?" Check with SPIRE and click YES or NO	YES/NO					
11.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT029_ASDSPTSPIR_PWR_ON_R it will prompt: "Set Bus Profile Back to Original Setting?" Select NO	NO					
12.	At the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK					
13.	Verify HK TM packets are being received on APIDs 1281 & 1283	OK					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--





Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
2.	<p>On HPCCS when prompted:</p> <p>"SPIRE Switch OFF for SPTs in Hel/Hell conditions ONLY - Select NO to abort TS if not correct"</p> <p><b>Select YES</b></p>	YES					
3.	<p>If <b>YES</b> is selected the test script will go on to automatically power off all SPIRE warm units.</p>						
4.	<p>During Switch OFF of SPIRE the following (5,2) and (5,4) event messages on APID 1281 may be expected and do not indicate a problem:</p> <p>EVID 1313 No_MCU_Response_Error EVID 21773 ALARM_LSMCU_DEAD</p>						
5.	<p>On HPCCS , the script S102999SCVT030_ASPTSPTSPIR_PWR_OFF_R will prompt:</p> <p>"Was the monitoring started during SPIRE power ON?"</p> <p>If unsure, check YES. The command to stop monitoring might fail if the monitoring was not started, this is OK.</p>	YES					

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>
---------------------------	--	-----------------	------------	------------	-----------------------

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
6.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK TM2N	Not refreshing Not incrementing			AND: SA_1_559		
7.	Select OK to continue	OK					
8.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT030_ASPTSPTSPIR_PWR_OFF_R it will prompt: "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"						
9.	Select OK to continue	OK					
10.	On HPCCS stop Packet History displays for the following APIDs:1281,1283	OK					
<b>SPIRE: OFF</b>							

**7.2.12 SPIRE I-EGSE Disconnection**

This procedure is only used if the complementary connection procedure has been performed previously. For most IST activities envisaged it is not required.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From HPCCS Test Conductor console issue command to disconnect PACS I-EGSE  <b>disconnect HSPIREEGSE</b>	YZS29940= DISCONNECTED		<b>AND: SYS_PARS</b>		
2.	From the HPCCS test conductor console terminate the test script:  <b>SPIRE_ALL_SubscribeParams</b>					
	<b>Return to calling Procedure</b>					

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

Doc. No: HP-2-ASED-TP-0206

Page

59

Issue: 3.0

Date: 18.12.08

File: HP-2-ASED-TP-0206\_Issue\_3.Doc

### 7.3 HIFI Instrument Full Configuration Procedures

#### 7.3.1 HIFI I-EGSE Configuration/Connection

This procedure is independent of HIFI redundancy configuration apart from I-EGSE configuration in step 1.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	<p>If not already on, Switch on &amp; configure HIFI I-EGSE i.a.w. <b>RD-6</b>.</p> <p>If switching on Nominal units then confirm I-EGESE configured for nominal and FPU cold and LOU warm without attenuators</p> <p>If switching on Redunant units then confirm I-EGESE configured for redundant and FPU cold and LOU warm without attenuators</p>	<p>OK</p> <p>Nominal/Redundant configuration</p>				
2.	<p>From HPCCS Test Conductor console issue command to connect to HIFI I-EGSE</p> <p style="text-align: center;"><b>connect HHIFIEGSE</b></p>	YZS27940 = CONNECTED		<b>AND SYS_PARS</b>		
3.	<i>Perform the following two steps if command parameter exchange is required between the IEGSE and HPCCS for the test concerned.</i>					
4.	<p>Run the following script to make sure that the CCS-IEGSE communication is optimal. <b>In case PACS_ALL_SubscribeParams.tcl or SPIRE_ALL_SubscribeParams.tcl is already running, terminate them first! In case HIFI is powered on using chapter 7.4.1 or 7.4.3 (ICU only), then this step can be SKIPPED.</b></p> <p style="text-align: center;"><b>HIFI_ALL_SubscribeParams</b></p>	OK				
5.	Make sure that HIFI_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
6.	<p>Verify correct connection and time synchronisation with IEGSE:</p> <p style="text-align: center;"><b>Y102999ETVT037_ASDGEN_VERHIFIEGSE</b></p>	OK				

Enter Date   Time:		Sign Off   TD:		PA:		Test Location:	
--------------------	--	----------------	--	-----	--	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	Patch HIFI synthetic parameters for warm conditions by executing the following scripts:  <p style="text-align: center;"><b>HIFIST_ASED_PatchPtvChecksum</b> <b>HIFIST_ASED_PatchTempLimits</b></p> <i>Note these scripts replace HIFIST_CCS_conf_ptv_checksum_warm due to NCR-3652</i>	OK				
8.	If not running already, start the instrument temperature logging script:  Z102999SCVT025_ASDGEN_INSTTEMP_LOG.tcl  In the GUI, Enable the TM monitor of all instruments that are powered on	OK				
	<b>Return to calling Procedure</b>					

**7.3.2 HIFI Nominal OFF to Standby1**

The following will switch ON and configure HIFI Nominal instrument in Standby1 mode. HKTM packets will be generated on APIDs 1024 dec and 1026 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

During power on of HIFI a number of soft/hard OOLs are reported due to the sequential switch on of the units. Some of these are to be expected when in Hel conditions and the others are expected because the unit is typically cold at switch ON.

**Parameters OOL when in Hel:**

HM248191 – HF\_AP\_2K\_IF\_CT

HM243191 – HF\_APR\_SCCS\_CT

HM244191 – HF\_APR\_S10K\_CT

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	-----------------	------------	------------	-----------------------	--



HM250191 – HF\_AP\_4K\_END\_CT

**Parameters OOL expected to come back in limits when units warmed up:**

HM187192 – HRV\_ACS\_1\_T

HM188192 – HRV\_AVS\_2\_T

HM062192 – HRH\_ACS\_1\_T

HM063192 – HRH\_AVS\_2\_T

**Parameter OOL until HIFI powered in Standby1**

HD247194 – HL\_ptv\_checksum

HM258194 – HL\_MODE\_S

HM259194 – HL\_error\_word\_S

Some additional parameters may exhibit OOL during the test:

**Parameter OOL expected during test but which should be monitored for duration of test (should be kept below 30degC to avoid HIGH-HIGHs being reported):**

HM062193 – HWV\_Laser\_T

HM023193 – HWH\_Laser\_T

**Parameter OOL expected during test but which need not be monitored:**

HM022193 – HWH\_CCD\_T

HM061193 – HWV\_CCD\_T

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1024,1026	OK				
2.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT014_ASDGEN_HIFIPWRON_P</b>	OK		ANDs HA000289 HA004289		
3.	On HPCCS when prompted:  "FM HIFI Switch ON for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct"	YES				
4.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script when prompted in the next step. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
5.	If <b>YES</b> is selected, the test script will go on to automatically power on all HIFI warm units, force boot the DPU ASW and configure the instrument to Standby.					
6.	At prompt "WAIT! DO NOT PRESS OK YET! if HIFIST_nom_Startup_LCU_table_load_warm.tcl ended successfully, select OK to continue"  Check that HIFIST_nom_Startup_LCU_table_load_warm.tcl ended in Test Console. If the script is hanging (NCR4181), then terminate the sequence and restart HIFIST_nom_Startup_LCU_table_load_warm.tcl manually in the Test Console.  Repeat the above check and only press OK, when the table load completed successfully.  Select OK					
7.	At prompt to record OBS_ID_per_hk during subsequent table readback commanding (which starts when OK is pressed); record value of HM003190 (typical reading = 9000xxxx hex), Note: at start & end value is 90000000 hex  "Select OK to continue"  Select OK	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
8.	<p>At prompt "WAIT! DO NOT PRESS OK YET! if LCU HIFIST_nom_Startup_LCU_table_read_warm ended successfully, select OK to continue"</p> <p>Check that HIFIST_nom_Startup_LCU_table_read_warm.tcl ended in Test Console. If the script is hanging (NCR4181), then terminate the sequence and restart HIFIST_nom_Startup_LCU_table_read_warm manually in the Test Console.</p> <p>Repeat the above check and only press OK, when the table read completed successfully.</p> <p>Select OK</p>					
9.	<p>Value of OBS_ID during table read commanding. Give both Hex and Dec values:</p> <p style="text-align: right;"><b>HM003190</b></p>	N/A	Hex <OBSID>=  Dec <OBSID>=	AND: HA000289		
10.	At prompt "Perform check on IEGSE to verify LCU table readback" Press OK.					
11.	<p>Request the nominated I-EGSE operator to run the command 'verifyreadback &lt;OBSID&gt;' from a terminal window (opened from the terminal icon " &gt;_" at bottom left of HIFIEGSE workstation screen) using the <b>Dec &lt;OBSID&gt;</b> value retrieved in the previous step. If the word <b>PASS</b> does not appear on the screen at the end of the verifyreadback, this is a nogo on this test procedure.</p> <p>If OK respond to "Press OK when IEGSE confirms LCU status OK" accordingly, otherwise contact SRON to investigate and resolve before continuing.</p>	OK				
12.	<p>On HPCCS when all autonomous actions have been completed by the power on script <b>H102999SCVT015_ASDISTHIFI_PWR_ON_P</b> it will prompt:</p> <p><i>"Set Bus Profile Back to Original Setting?"</i></p>					

Enter Date   Time:			Sign Off	TD:	PA:	Test Location:	
--------------------	--	--	----------	-----	-----	----------------	--



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
13.	<p>Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.</p> <p><i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i></p> <p>“Bus Profile left unchanged, as original setting 0 (Launch)”</p> <p>Select OK to continue</p> <p>Otherwise the following prompt will appear: “Bus Profile set back to original setting”</p> <p>If prompted select <b>OK</b> to continue</p>	OK				
14.	<p>If <b>NO</b> selected then at the prompt:</p> <p>“Bus Profile left unchanged”</p> <p>Select OK to continue</p>	OK				
15.	Verify HK TM packets are being received on APIDs 1024 & 1026	OK				
16.	Execute test script: <b>HIFIST_nom_IST_LO_disable_warm</b>					
17.	Execute test script: <b>HIFIST_nom_IST_LO_on_1a_warm</b>					
18.	Verify HL_Channel_S is OFF	HM003194 = OFF		AND HA003289		

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
19.	Start Active Cooling of HIFI Panel i.a.w. AD-2  <i>Even with the cooling on, the temperature of the lasers could reach upto 30 °C. If this is the case, the hard out-of-limit will trigger continuously when the temperature is around 30 °C. At this point the limit should be changed to 31 by executing the following commands:</i>  <i>patchlimit HM023193 H 1 10 31</i> <i>patchlimit HM062193 H 1 10 31</i>	OK				
20.	Using TM Plot application on CCS start monitoring the temperature of the WBS lasers; parameters: HM062193 (HWV_Laser_T) & HM023193 (HWH_Laser_T). See Section 5.3.2.1 for details of this activity.	OK				
	<b>HIFI Nominal powered and in Standby1 mode</b> <b>Return to calling procedure</b>	OK				

### 7.3.3 HIFI Nominal Standby1 to OFF

The following procedure will switch HIFI Nominal from Standby1 to OFF.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT015_ASDGEN_HIFIPWROFF_P</b>	OK				
2.	On HPCCS when prompted:  "FM HIFI Switch OFF for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
4.	If <b>YES</b> is selected the test script will go on to automatically power off all HIFI warm units.					
5.	On HPCCS when all autonomous actions have been completed by the power off script <b>H102999SCVT016_ASDISTHIFI_PWR_OFF_P</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
6.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
7.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
8.	On HPCCS stop Packet History displays for the following APIDs:1024,1026	OK				
9.	Stop Active Cooling of HIFI Panel i.a.w. AD-2	OK				
	<b>HIFI OFF</b> <b>Return to calling Procedure</b>	OK				

**7.3.4 HIFI Redundant OFF to Standby1**

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

The following will switch ON and configure HIFI Redundant instrument in Standby1 mode (Lasers OFF). HKTM packets will be generated on APIDs 1025 dec and 1027 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

During power on of HIFI a number of soft/hard OOLs are reported due to the sequential switch on of the units. Some of these are to be expected when in Hel conditions and the others are expected because the unit is typically cold at switch ON:

**Parameters OOL when in Hel:**

- HM248191 – HF\_AP\_2K\_IF\_CT
- HM243191 – HF\_APR\_SCCS\_CT
- HM244191 – HF\_APR\_S10K\_CT
- HM250191 – HF\_AP\_4K\_END\_CT

**Parameters OOL expected to come back in limits when units warmed up:**

- HM187192 – HRV\_ACS\_1\_T
- HM188192 – HRV\_AVS\_2\_T
- HM062192 – HRH\_ACS\_1\_T
- HM063192 – HRH\_AVS\_2\_T

**Parameters OOL until HIFI powered in Standby1**

- HD247194 – HL\_ptv\_checksum
- HM258194 – HL\_MODE\_S
- HM259194 – HL\_error\_word\_S

Some additional parameters may exhibit OOL during the test:

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

Parameters OOL expected during test but which should be monitored for duration of test (should be kept below 30degC to avoid HIGH-HIGHs being reported):

HM062193 – HWV\_Laser\_T

HM023193 – HWH\_Laser\_T

Parameter OOL expected during test but which need not be monitored:

HM022193 – HWH\_CCD\_T

HM061193 – HWV\_CCD\_T

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1025,1027	OK				
2.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT016_ASDGEN_HIFIPWRON_R</b>	OK		ANDs HA000289 HA004289		
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script when prompted in the next step. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	On HPCCS when prompted:  “FM HIFI Switch ON for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct”	YES				
5.	If <b>YES</b> is selected the test script will go on to automatically power on all HIFI warm units, force boot the DPU ASW and configure the instrument to Standby.  NB: In principle the HIFI instrument support responsible shall be on hand to observe the status of HIFI. <b>So he should be contacted before the next test step.</b>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
6.	<p>At prompt "WAIT! DO NOT PRESS OK YET! If HIFIST_nom_Startup_LCU_table_load_warm.tcl ended successfully, select OK to continue"</p> <p>Check that HIFIST_nom_Startup_LCU_table_load_warm.tcl ended in Test Console. If the script is hanging (NCR4181), then terminate the sequence and restart HIFIST_nom_Startup_LCU_table_load_warm.tcl manually in the Test Console.</p> <p>Repeat the above check and only press OK, when the table load completed successfully.</p> <p>Select OK</p>					
7.	<p>At prompt to record OBS_ID_per_hk during subsequent table readback commanding (which starts when OK is pressed); record value of HM003190 (typical reading = 9000xxxx hex), Note: at start &amp; end value is 90000000 hex</p> <p>"Select OK to continue"</p> <p>Select OK</p>	OK				
8.	<p>At prompt "WAIT! DO NOT PRESS OK YET! if HIFIST_nom_Startup_LCU_table_read_warm.tcl ended successfully, select OK to continue"</p> <p>Check that HIFIST_nom_Startup_LCU_table_read_warm.tcl ended in Test Console. If the script is hanging (NCR4181), then terminate the sequence and restart HIFIST_nom_Startup_LCU_table_read_warm.tcl manually in the Test Console.</p> <p>Repeat the above check and only press OK, when the table read completed successfully.</p> <p>Select OK</p>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
9.	Value of OBS_ID during table read commanding. Give both Hex and Dec values:  <b>HM003190</b>	N/A	Hex <OBSID>=  Dec <OBSID>=	AND: HA000289		
10.	At prompt "Perform check on IEGSE to verify LCU table readback" Press OK.					
11.	Request the nominated I-EGSE operator to run the command 'verifyreadback <OBSID>' from a terminal window (opened from the terminal icon " >_ " at bottom left of HIFIEGSE workstation screen) using the <b>Dec &lt;OBSID&gt;</b> value retrieved in the previous step. If the word <b>PASS</b> does not appear on the screen at the end of the verifyreadback, this is a nogo on this test procedure.  If OK respond to "Press OK when IEGSE confirms LCU status OK" accordingly, otherwise contact SRON to investigate and resolve before continuing.	OK				
12.	On HPCCS when all autonomous actions have been completed by the power on script <b>H102999SCVT017_ASDISTHIFI_PWR_ON_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
13.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
14.	If <b>NO</b> selected then at the prompt: "Bus Profile left unchanged"  Select OK to continue	OK				
15.	Verify HK TM packets are being received on APIDs 1025 & 1027	OK				
16.	Execute test script:  <b>HIFIST_nom_IST_LO_disable_warm</b>					
17.	Execute test script:  <b>HIFIST_nom_IST_LO_on_1a_warm</b>					
18.	Verify HL_Channel_S is OFF	HM003194 = OFF		AND HA003289		
19.	Start Active Cooling of HIFI Panel i.a.w. AD-2  <i>Even with the cooling on, the temperature of the lasers could reach upto 30 °C. If this is the case, the hard out-of-limit will trigger continuously when the temperature is around 30 °C. At this point the limit should be changed to 31 by executing the following commands:</i>  <i>patchlimit HM023193 H 1 10 31</i> <i>patchlimit HM062193 H 1 10 31</i>	OK				
20.	Using TM Plot application on CCS start monitoring the temperature of the WBS lasers; parameters: HM062193 (HWV_Laser_T) & HM023193 (HWH_Laser_T). See Section 5.3.2.1 for details of this activity.	OK				
	<b>HIFI Redundant powered and in Standby1 mode</b> <b>Return to calling procedure</b>	OK				

### 7.3.5 HIFI Redundant Standby1 to OFF

The following procedure will switch HIFI Redundant from Standby1 to OFF.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT017_ASDGEN_HIFIPWROFF_R</b>	OK				
2.	On HPCCS when prompted: "FM HIFI Switch OFF for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all HIFI warm units.					
5.	On HPCCS when all autonomous actions have been completed by the power off script <b>H102999SCVT018_ASDISTHIFI_PWR_OFF_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
6.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
7.	If <b>NO</b> selected then at the prompt: "Bus Profile left unchanged"  Select OK to continue	OK				
8.	On HPCCS stop Packet History displays for the following APIDs:1025,1027	OK				
9.	Stop Active Cooling of HIFI Panel i.a.w. AD-2	OK				
	<b>HIFI OFF</b> <b>Return to calling Procedure</b>	OK				

**7.3.6 HIFI Nominal Standby1 to Science (PRIME)**

Running the following procedure will configure HIFI Nominal from STANDBY1 to Prime mode via Standby2 mode.

When in Prime mode, simulated science is started which will generate packets on APIDs 1028, 1029, 1030 & 1031. It should be noted that HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.

**Note: Transitions above Standby1 are not considered for HIFI Redundant at present.**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put HIFI into science from Standby1:  <b>Z102999SCVT020_ASDGEN_HIFISTBY1_2OPS_P</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
2.	On HPCCS when prompted: "Command HIFI from STANDBY1 via STANDBY2 to PRIME mode in Hel/Hell with WARM LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
3.	On HPCCS when prompted: "Bus profile left as HIFI PRIME while in Science Prime mode - OK to continue"  Select OK	OK				
	<b>HIFI Nominal in Science Prime Return to or synchronise with calling Procedure</b>	OK				

**7.3.7 HIFI Nominal Science (PRIME) to Standby1**

Running the following procedure will configure HIFI from Science (Prime) to STANDBY1 via Standby2 mode. The transition from Standby2 to Standby1 switches off the WEV & WEH lasers. The active cooling from external GSE (see section 5.3.2.1 for details) should therefore be stopped.

**Note: Transitions above Standby1 are not considered for HIFI Redundant at present.**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put HIFI in Standby1 from simulated Science:  <b>Z102999SCVT021_ASDGEN_HIFIOPS2_STBY1_P</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
2.	On HPCCS when prompted: "Command HIFI from PRIME via STANDBY2 to STANDBY1 mode in Hel/Hell with WARM LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
3.	On HPCCS when prompted: "Bus profile left as HIFI PRIME, change manually after if required - OK to continue"  Select <b>OK</b>	OK				
	<b>HIFI Nominal in Standby1</b> <b>Return to or synchronise with calling Procedure</b>	OK				

**7.3.8 HIFI I-EGSE Disconnection**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From HPCCS Test Conductor console issue command to disconnect PACS I-EGSE  <b>disconnect HHIFIEGSE</b>	YZS27940 = DISCONNECTED		<b>AND: SYS_PARS</b>		
2.	From the HPCCS test conductor console terminate the test script:  <b>HIFI_ALL_SubscribeParams</b>					
	<b>Return to calling Procedure</b>					

**7.3.9 HIFI Nominal Standby1 to Standby2**

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Running the following procedure will configure HIFI from STANDBY1 to STANDBY2 mode. The transition from Standby1 to Standby2 switches on the WEV & WEH lasers. The active cooling from external GSE (see section 5.3.2.1 for details) should therefore be active.

**Note: Transitions above Standby1 are not considered for HIFI Redundant at present.**

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put HIFI in Standby2 from Standby1:  <b>Z102999SCVT022_ASDGEN_HIFISTBY1_2STBY2_P</b>	OK				
2.	On HPCCS when prompted:  "Command HIFI from STANDBY1 to STANDBY2 in Hel/Hell with WARM LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
	<b>HIFI Nominal in Standby2</b> <b>Return to or synchronise with calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.3.10 HIFI Nominal Standby2 to Standby1**

Running the following procedure will configure HIFI from STANDBY2 to STANDBY1 mode. The transition from Standby2 to Standby1 switches off the WEV & WEH lasers. The active cooling from external GSE (see section 5.3.2.1 for details) should be active.

**Note: Transitions above Standby1 are not considered for HIFI Redundant at present.**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put HIFI in Standby2 from Standby1:  <b>Z102999SCVT023_ASDGEN_HIFISTBY2_2STBY1_P</b>	OK				
2.	On HPCCS when prompted:  "Command HIFI from STANDBY2 to STANDBY1 in Hel/Hell with WARM LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
	<b>HIFI Nominal in Standby1</b> <b>Return to or synchronise with calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------

## 7.4 HIFI Instrument ICU Only Configuration Procedures

### 7.4.1 HIFI Nominal OFF to ICU ON

The following will switch ON and configure HIFI Nominal ICU. HKTM packets will be generated on APIDs 1024 dec and 1026 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1024,1026	OK				
2.	From the HPCCS test conductor console start the test script:  <b>H102999SCVT009_ASDGENHIFI_ICU_ON_P</b>	OK		ANDs HA000289 HA004289		
3.	On HPCCS when prompted: "FM HIFI ICU Standalone Switch ON - Select NO to abort TS if not correct"	YES				
4.	On HPCCS when all autonomous actions have been completed by the power on script <b>H102999SCVT009_ASDGENHIFI_ICU_ON_P</b> it will prompt:  "Set Bus Profile Back to Original Setting?"	NO				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
6.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
7.	Verify HK TM packets are being received on APIDs 1024 & 1026	OK				
	<b>HIFI Nominal ICU powered</b> <b>Return to calling procedure</b>	OK				

**7.4.2 HIFI Nominal ICU ON to OFF**

The following procedure will switch HIFI Nominal ICU OFF.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>H102999SCVT010_ASDGENHIFI_ICU_OFF_P</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:
--------------------	--	----------	-----	-----	----------------



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
2.	On HPCCS when prompted: "FM HIFI ICU Standalone Switch OFF - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all HIFI warm units.					
5.	On HPCCS when all autonomous actions have been completed by the power off script <b>H102999SCVT010_ASDGENHIFI_ICU_OFF_P</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
6.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
7.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
8.	On HPCCS stop Packet History displays for the following APIDs:1024,1026	OK				
	<b>HIFI OFF</b> <b>Return to calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.4.3 HIFI Redundant OFF to ICU ON**

The following will switch ON and configure HIFI Redundant ICU. HKTM packets will be generated on APIDs 1025 dec and 1027 decimal (these can be observed using TMPH with corresponding filter – note however a limited number of TMPHs should be running at one time).

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	On HPCCS start Packet History displays for the following APIDs:1025,1027	OK				
2.	From the HPCCS test conductor console start the test script:  <b>H102999SCVT011_ASDGENHIFI_ICU_ON_R</b>	OK		ANDs HA000289 HA004289		
3.	On HPCCS when prompted:  "FM HIFI ICU Standalone Switch ON - Select NO to abort TS if not correct"	YES				
4.	On HPCCS when all autonomous actions have been completed by the power on script <b>H102999SCVT011_ASDGENHIFI_ICU_ON_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	<p>Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.</p> <p><i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i></p> <p>“Bus Profile left unchanged, as original setting 0 (Launch)”</p> <p>Otherwise the following prompt will appear: “Bus Profile set back to original setting”</p> <p>If prompted select <b>OK</b> to continue</p>	OK				
6.	<p>If <b>NO</b> selected then at the prompt:</p> <p>“Bus Profile left unchanged”</p> <p>Select OK to continue</p>	OK				
7.	Verify HK TM packets are being received on APIDs 1025 & 1027	OK				
	<b>HIFI Redundant ICU powered Return to calling procedure</b>	OK				

**7.4.4 HIFI Redundant ICU ON to OFF**

The following procedure will switch HIFI Redundant ICU OFF.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	<p>From the HPCCS test conductor console start the test script:</p> <p style="text-align: center;"><b>H102999SCVT012_ASDGENHIFI_ICU_OFF_R</b></p>	OK				

Enter Date   Time:			Sign Off   TD:	PA:	Test Location:
--------------------	--	--	----------------	-----	----------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
2.	On HPCCS when prompted: "FM HIFI ICU Standalone Switch OFF - Select NO to abort TS if not correct"	YES				
3.	If in any doubt about the script being executed <b>NO</b> should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
4.	If <b>YES</b> is selected the test script will go on to automatically power off all HIFI warm units.					
5.	On HPCCS when all autonomous actions have been completed by the power off script <b>H102999SCVT012_ASDGENHIFI_ICU_OFF_R</b> it will prompt:  "Set Bus Profile Back to Original Setting?"					
6.	Select <b>YES</b> if it is likely that other non-HIFI instrument related activities are to be performed.  <i>However note that if the original Bus Profile was 0 (launch) the script will automatically leave the Bus Profile unchanged as this profile is not compatible with instruments being powered in Standby:</i>  "Bus Profile left unchanged, as original setting 0 (Launch)"  Otherwise the following prompt will appear: "Bus Profile set back to original setting"  If prompted select <b>OK</b> to continue	OK				
7.	If <b>NO</b> selected then at the prompt:  "Bus Profile left unchanged"  Select OK to continue	OK				
8.	On HPCCS stop Packet History displays for the following APIDs:1025,1027	OK				
	<b>HIFI OFF</b> <b>Return to calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

**7.4.5 HIFI Nominal ICU ON to Simulated Science**

Running the following procedure will configure HIFI from ICU ON to Simulated Science mode.

Note HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to put HIFI into simulated science: <b>H102999SCVT030_ASDISTHIFI_ICUON_2SIMSCI</b>	OK				
2.	On HPCCS when prompted:  "Command HIFI from ICU ON to Simulated Science mode in Hel/Hell conditions - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
3.	On HPCCS when prompted:  "Bus profile left as HIFI PRIME while in Science Prime mode - OK to continue"  Select OK	OK				
	<b>HIFI Nominal in Simulated Science</b> <b>Return to or synchronise with calling Procedure</b>	OK				

**7.4.6 HIFI Nominal Simulated Science (PRIME) to ICU ON**

Running the following procedure will configure HIFI from Simulated Science (Prime) to ICU ON.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

When in Prime mode, simulated science is started which will generate packets on APIDs 1028, 1029, 1030 & 1031. It should be noted that HPCCS does not acquire the science packets in SCOS but archives them into TMDUMP files instead. However, it will route the packets to the IEGSE if the link is enabled.

**Note: Transitions above Standby1 are not considered for HIFI Redundant at present.**

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to HIFI Stop simulated Science: <b>H102999SCVT031_ASDISTHIFI_SIMSCI_2ICUON</b>	OK				
2.	On HPCCS when prompted: “Command HIFI from Simulated Science mode to ICU ON in Hel/Hell conditions - Select NO to abort TS if not correct”  Select <b>YES</b>	YES				
3.	On HPCCS when prompted: “Bus profile left as HIFI PRIME, change manually after if required - OK to continue”  Select <b>OK</b>	OK				
	<b>HIFI Nominal in ICU ON</b> <b>Return to or synchronise with calling Procedure</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

### 7.5 Instrument FDIR Recovery Procedures

This section details the generic recovery procedure for instruments should an unexpected FDIR event occur.

**Warning: These recovery procedures shall only used when the reason for the OBCP FDIR triggering is clear and there is no risk to the instrument by performing the recovery. If in any doubt the relevant expert should be called before attempting recovery.**

#### 7.5.1 PACS FDIR Recovery

Step-No.	IST_START-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
1.	Execute from the Test Conductor Console±  "callasync Z010999MCVT156_IST_PACS_OBCP_recovery"  This script will: <ul style="list-style-type: none"> <li>• Check EAT Entries</li> <li>• Check TC Routing</li> <li>• Enable TC Routing if disabled</li> <li>• Enable EATs for PACS Nom (evID 0x0006) if disabled</li> <li>• Enable EATs for PACS Red (evID 0x0006) if disabled</li> <li>• Check PACS Onboard Schedule status</li> <li>• Enable PACS sub-schedule 90 if disabled</li> <li>• Disable PACS sub-schedule 80 if enabled</li> </ul>						
	<b>END OF PACS RECOVERY</b>						

Enter Date   Time:			Sign Off	TD:	PA:	Test Location:	
--------------------	--	--	----------	-----	-----	----------------	--

**7.5.2 SPIRE FDIR Recovery**

Step-No.	IST_START-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
1.	Execute from the Test Conductor Console± "callasync Z010999MCVT15_IST_OBCPS_RECOVERY SPIRE" This script will: <ul style="list-style-type: none"> <li>• Check EAT Entries</li> <li>• Enable EATs for SPIRE Nom (evID 0xC110) if disabled</li> <li>• Enable EATs for SPIRE Red (evID 0xC110) if disabled</li> <li>• Check SPIRE Onboard Schedule status</li> <li>• Enable SPIRE sub-schedule 370 if disabled</li> </ul>						
	<b>END OF SPIRE RECOVERY</b>						

**7.5.3 HIFI FDIR Recovery**

Step-No.	IST_START-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N

Enter Date   Time:			Sign Off	TD:	PA:	Test Location:	
--------------------	--	--	----------	-----	-----	----------------	--



Step-No.	IST_START-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
1.	Execute from the Test Conductor Console± "callasync Z010999MCVT15_IST_OBCPS_RECOVERY HIFI" This script will: <ul style="list-style-type: none"> <li>• Check HIFI Onboard Schedule status</li> <li>• Enable HIFI sub-schedule 70 if disabled</li> <li>• Disable HIFI sub-schedule 60 if enabled</li> </ul>						
	<b>END OF HIFI RECOVERY</b>						

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

## 7.6 Instrument Emergency OFF Procedures

This section details the Emergency generic recovery procedure for instruments. They should only be used on request of the instrument teams or instrument experts in the AIT team.

**Warning: If in any doubt the relevant expert should be called before attempting recovery.**

**For each instrument there are 2 ways of switching OFF, one by OBCP, the other one by controlled procedure. Since the OBCPs are much faster, they should be used in all occasions when the OBCPs are loaded. In the other cases, the other manual procedures can be used.**

### 7.6.1 By OBCP

#### 7.6.1.1 PACS EMERGENCY SWITCH OFF (valid for Primary and Redundant)

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT026_ASDGEN_PACS_OBCP_NORMAL_OFF</b>					
2.	During <b>Z102999SCVT026_ASDGEN_PACS_OBCP_NORMAL_OFF</b> , at the prompt "Do you really want to switch off PACS using OBCP DB_OBCP_H_PACS_NORMAL_OFF?"  Click <b>YES</b>	YES				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
3.	Check if PACS is OFF LCL 27 open (P) LCL 28 open (R) LCL 35 open (P) LCL 36 open (R) LCL 41 open (P) LCL 42 open (R) LCL 65 open (P) LCL 69 open (R)  No TM on APID 1152/1153 and 1154/1155  <i>If PACS is OFF, skip all following steps in this chapter!</i>	OK				
4.	<b>If PACS is not OFF.</b> From the HPCCS test conductor console start the test script:  <b>Z102999SCVT028_ASDGEN_PACS_OBCP_SAFE_MODE</b>					
5.	During <b>Z102999SCVT028_ASDGEN_PACS_OBCP_SAFE_MODE</b> , at the prompt "Do you really want to switch PACS to SAFE mode using OBCP DB_OBCP_H_PACS_SAFE?"  Click <b>YES</b>	YES				
6.	<b>If PACS is not OFF.</b> From the HPCCS test conductor console start the test script:  <b>Z102999SCVT027_ASDGEN_PACS_OBCP_IMMEDIATE_OFF</b>					
7.	During <b>Z102999SCVT027_ASDGEN_PACS_OBCP_IMMEDIATE_OFF</b> , at the prompt "Do you really want to switch off PACS using OBCP DB_OBCP_H_PACS_IMMEDIATE_OFF?"  Click <b>YES</b>	YES				
	<b>PACS OFF</b>					

Enter Date   Time:			Sign Off TD:	PA:	Test Location:	
--------------------	--	--	--------------	-----	----------------	--

7.6.1.2 SPIRE EMERGENCY SWITCH OFF (valid for Primary and Redundant)

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT032_ASDGEN_SPIRE_OBCP_CONTROL_OFF</b>					
2.	During <b>Z102999SCVT032_ASDGEN_SPIRE_OBCP_CONTROL_OFF</b> , at the prompt "Do you really want to switch off SPIRE using OBCP DB_OBCP_H_SPIRE_OFF_CTRL?"  Click <b>YES</b>	YES				
3.	Check if SPIRE is OFF LCL 11 open (P) LCL 12 open (R) LCL 51 open (P) LCL 52 open (R)  No TM on APID 1280/1281 and 1282/1283  <i>If SPIRE is OFF, skip all following steps in this chapter!</i>	OK				
4.	<b>If SPIRE is not OFF.</b> From the HPCCS test conductor console start the test script:  <b>Z102999SCVT033_ASDGEN_SPIRE_OBCP_IMMEDIATE_OFF</b>					
5.	During <b>Z102999SCVT033_ASDGEN_SPIRE_OBCP_IMMEDIATE_OFF</b> , at the prompt "Do you really want to switch SPIRE Immediate OFF using OBCP DB_OBCP_H_SPIRE_OFF?"  Click <b>YES</b>	YES				
	<b>SPIRE OFF</b>					

7.6.1.3 HIFI EMERGENCY SWITCH OFF (Primary only!)

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT030_ASDGEN_HIFI_OBCP_RESET_P</b>					
2.	During <b>Z102999SCVT030_ASDGEN_HIFI_OBCP_RESET_P</b> , at the prompt "Do you really want to reset HIFI using OBCP DB_OBCP_H_HIFI_RESET?"  Click <b>YES</b>	YES				
3.	During <b>Z102999SCVT030_ASDGEN_HIFI_OBCP_RESET_P</b> , at the prompt "Switch off HIFI primary immediately?"  Check if HIFI primary and redundant are OFF: LCL 53 open LCL 43 open LCL 44 open LCL 63 open LCL 64 open LCL 67 open No TM on APID 1024 and 1026  If HIFI primary is OFF, Click <b>NO</b> If HIFI primary is ON, Click <b>YES</b>					
	<b>HIFI PRIMARY OFF</b>					

7.6.1.4 HIFI EMERGENCY SWITCH OFF (Redundant only!)

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT034_ASDGEN_HIFI_OBCP_RESET_R</b>					

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
2.	During <b>Z102999SCVT034_ASDGEN_HIFI_OBCP_RESET_R</b> , at the prompt “Do you really want to reset HIFI using OBCP_DB_OBCP_H_HIFI_RESET?”  Click <b>YES</b>	YES				
3.	During <b>Z102999SCVT034_ASDGEN_HIFI_OBCP_RESET_R</b> , at the prompt “Switch off HIFI redundant immediately?”  Check if HIFI redundant is OFF: LCL 54 open LCL 43 open LCL 44 open LCL 63 open LCL 68 open LCL 67 open No TM on APID 1025 and 1027  If HIFI redundant is OFF, Click <b>NO</b> If HIFI redundant is ON, Click <b>YES</b>					
	<b>HIFI REDUNDANT OFF</b>					

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	-----------------	------------	------------	-----------------------	--

**7.6.2 By Ground Procedure**

7.6.2.1 PACS NOMINAL EMERGENCY SWITCH OFF

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Execute section 7.1.8 of this procedure to put PACS into SAFE mode	OK				
2.	From the HPCCS test conductor console start the test script to power OFF PACS Prime from SAFE:  <b>P102999SCVT906_ASDISTPACS_PWR_OFF_N</b>					
3.	On HPCCS when prompted:  "FM PACS Switch OFF in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
4.	Note: During switch off of PACS (5,2) TM event packets are expected					
5.	On HPCCS when all autonomous actions have been completed by the power on script P102999SCVT906_ASDISTPACS_PWR_OFF_N it will prompt:  "Set Bus Profile Back to Original Setting?"  Select <b>NO</b>	NO				
6.	At the prompt:  "Bus Profile left unchanged"  Select <b>OK</b> to continue	OK				
	<b>PACS OFF</b>					

Enter Date   Time:		Sign Off TD:	PA:	Test Location:	
--------------------	--	--------------	-----	----------------	--

7.6.2.2 PACS REDUNDANT EMERGENCY SWITCH OFF

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Execute section 7.1.8 of this procedure to put PACS into SAFE mode	OK				
2.	From the HPCCS test conductor console start the test script to power OFF PACS Redundant from SAFE:  <b>P102999SCVT908_ASDISTPACS_PWR_OFF_R</b>					
3.	On HPCCS when prompted:  "FM PACS Switch OFF in Warm or Cold conditions, FPU connected - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
4.	Note: During switch off of PACS (5,2) TM event packets are expected					
5.	On HPCCS when all autonomous actions have been completed by the power on script P102999SCVT908_ASDISTPACS_PWR_OFF_R it will prompt:  "Set Bus Profile Back to Original Setting?"  Select <b>NO</b>	NO				
6.	At the prompt:  "Bus Profile left unchanged"  Select <b>OK</b> to continue	OK				
	<b>PACS OFF</b>					

7.6.2.3 SPIRE NOMINAL EMERGENCY SWITCH OFF

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



If SPIRE is in REDY mode, use chapter 7.2.3 (primary) or 7.2.5 (redundant)

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Switch SPIRE to DRCU ON					
2.	Run the following script to make sure that the CCS-IEGSE communication is optimal:  <b>SPIRE_ALL_SubscribeParams</b>	OK				
3.	Make sure that SPIRE_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
4.	Confirm that the HPCCS is connected to SPIRE I-EGSE, if not issue the command:  <b>connect HSPIREEGSE</b>	CONNECTED				
5.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-PDET-OFF-P</b>	OK				
6.	Check that the Photometer detectors are switched off:  PSWJFETSTAT PMLWJFETSTAT	0x3F/-/0 0x7F/-/0				
7.	Check that the Photometer LIAs are switched off:  PLIABITSTAT	1/-/0				
8.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-PDET-OFF-P</b> completed execution, checks nominal and obtain confirmation to execute next step.	OK				
9.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-BSM-OFF-P</b>	OK				
10.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-BSM-OFF-P</b> completed execution and obtain confirmation to execute next step	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
11.	From the HPCCS start the test script and wait for completion: <b>SPIRE-IST-COLD-SDET-OFF-P</b>	OK				
12.	Check that the Spectrometer detectors are switched off: SPECJFETSTAT	7/-/0				
13.	Check that the Spectrometer LIAs are switched off: SLIABITSTAT	1/-/0				
14.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SDET-OFF-P</b> completed execution, checks nominal and obtain confirmation to execute next step	OK				
15.	From the HPCCS start the test script and wait for completion: <b>SPIRE-IST-COLD-SMEC-OFF-P</b>	OK				
16.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SMEC-OFF-P</b> completed execution and obtain confirmation to execute next step	OK				
17.	From the HPCCS start the test script and wait for completion: <b>SPIRE-IST-COLD-MCU-OFF-P</b>	OK				
18.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-MCU-OFF-P</b> completed execution and obtain confirmation to execute next step	OK				
19.	From the HPCCS start the test script and wait for completion: <b>SPIRE-IST-COLD-SCU-OFF-P</b>	OK				
20.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SCU-OFF-P</b> completed execution and obtain confirmation to execute next step	OK				
21.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime: <b>S102999SCVT032_ASDCFTSPIR_PWR_OFF_P</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
22.	On HPCCS when prompted: "SPIRE Switch OFF for CFT related tests in Hel/Hell conditions only - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
23.	During Switch OFF of SPIRE the following (5,2) and (5,4) event messages on APID 1280 may be expected and do not indicate a problem:  e) EVID 1313 No_MCU_Response_Error f) EVID 21773 ALARM_LSMCU_DEAD					
24.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK TM2N	Not refreshing Not incrementing		<b>AND: SA_1_559</b>		
25.	Select <b>OK</b> to continue	OK				
26.	On HPCCS when all autonomous actions have been completed by the power on script <b>S102999SCVT032_ASDCFTSPIR_PWR_OFF_P</b> it will prompt:  "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"					
27.	Select <b>OK</b> to continue	OK				
	<b>SPIRE OFF</b>					

7.6.2.4 SPIRE REDUNDANT EMERGENCY SWITCH OFF

**If SPIRE is in REDY mode, use chapter 7.2.3 (primary) or 7.2.5 (redundant)**

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Switch SPIRE to DRCU ON					
2.	Run the following script to make sure that the CCS-IEGSE communication is optimal:  <b>SPIRE_ALL_SubscribeParams</b>	OK				
3.	Make sure that PACS_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
4.	Confirm that the HPCCS is connected to SPIRE I-EGSE, if not issue the command:  <b>connect HSPIREEGSE</b>	CONNECTED				
5.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-PDET-OFF-R</b>	OK				
6.	Check that the Photometer detectors are switched off:  PSWJFETSTAT PMLWJFETSTAT	0x3F/-/0 0x7F/-/0				
7.	Check that the Photometer LIAs are switched off:  PLIABITSTAT	1/-/0				
8.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-PDET-OFF-R</b> completed execution, checks nominal and obtain confirmation to execute next step.	OK				
9.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-BSM-OFF-R</b>	OK				
10.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-BSM-OFF-R</b> completed execution and obtain confirmation to execute next step	OK				
11.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-SDET-OFF-R</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
12.	Check that the Spectrometer detectors are switched off:  SPECJFETSTAT	7/-/0				
13.	Check that the Spectrometer LIAs are switched off:  SLIABITSTAT	1/-/0				
14.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SDET-OFF-R</b> completed execution, checks nominal and obtain confirmation to execute next step	OK				
15.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-SMEC-OFF-R</b>	OK				
16.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SMEC-OFF-R</b> completed execution and obtain confirmation to execute next step	OK				
17.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-MCU-OFF-R</b>	OK				
18.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-MCU-OFF-R</b> completed execution and obtain confirmation to execute next step	OK				
19.	From the HPCCS start the test script and wait for completion:  <b>SPIRE-IST-COLD-SCU-OFF-R</b>	OK				
20.	Inform ESOC-MOC/SPIRE Responsible that <b>SPIRE-IST-COLD-SCU-OFF-R</b> completed execution and obtain confirmation to execute next step	OK				
21.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime:  <b>S102999SCVT034_ASDCFTSPIR_PWR_OFF_R</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
22.	On HPCCS when prompted: "SPIRE Switch OFF for CFT related tests in Hel/Hell conditions only - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
23.	During Switch OFF of SPIRE the following (5,2) and (5,4) event messages on APID 1281 may be expected and do not indicate a problem:  g) EVID 1313 No_MCU_Response_Error h) EVID 21773 ALARM_LSMCU_DEAD					
24.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:  THSK TM2N	Not refreshing Not incrementing		<b>AND: SA_1_559</b>		
25.	Select <b>OK</b> to continue	OK				
26.	On HPCCS when all autonomous actions have been completed by the power on script <b>S102999SCVT034_ASDCFTSPIR_PWR_OFF_R</b> it will prompt:  "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"					
27.	Select <b>OK</b> to continue	OK				
	<b>SPIRE OFF</b>					

7.6.2.5 HIFI NOMINAL EMERGENCY SWITCH OFF

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
----------	-----------------------	---------------	--------------	---------	---	---

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Run the following script to make sure that the CCS-IEGSE communication is optimal:  <b>HIFI_ALL_SubscribeParams</b>	OK				
2.	Make sure that PACS_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
3.	Confirm that the HPCCS is connected to SPIRE I-EGSE, if not issue the command:  <b>connect HHIFIEGSE</b>	CONNECTED				
4.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT021_ASDGEN_HIFIOPS2_STBY1_P</b>	OK				
5.	From the HPCCS test conductor console start the test script:  <b>H102999SCVT016_ASDISTHIFI_PWR_OFF_P</b>	OK				
6.	On HPCCS when prompted:  "FM HIFI Switch OFF for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
7.	On HPCCS when all autonomous actions have been completed by the power on script H102999SCVT016_ASDISTHIFI_PWR_OFF_P it will prompt:  "Set Bus Profile Back to Original Setting?"  Select <b>NO</b>	NO				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
8.	at the prompt: "Bus Profile left unchanged"  Select <b>OK</b> to continue	OK				
	<b>HIFI OFF</b>					

7.6.2.6 HIFI REDUNDANT EMERGENCY SWITCH OFF

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Run the following script to make sure that the CCS-IEGSE communication is optimal:  <b>HIFI_ALL_SubscribeParams</b>	OK				
2.	Make sure that PACS_ALL_SubscribeParams in the Test Console is WAITING and not RUNNING. If still RUNNING, wait until the status changes to WAITING	OK				
3.	Confirm that the HPCCS is connected to SPIRE I-EGSE, if not issue the command:  <b>connect HHIFIEGSE</b>	CONNECTED				
4.	From the HPCCS test conductor console start the test script:  <b>Z102999SCVT024_ASDGEN_HIFIOPS2_STBY1_R</b>	OK				
5.	From the HPCCS test conductor console start the test script:  <b>H102999SCVT018_ASDISTHIFI_PWR_OFF_R</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
6.	On HPCCS when prompted: "FM HIFI Switch OFF for IST or SFT in Hel/Hell conditions with warm LOU - Select NO to abort TS if not correct"  Select <b>YES</b>	YES				
7.	On HPCCS when all autonomous actions have been completed by the power on script H102999SCVT018_ASDISTHIFI_PWR_OFF_R it will prompt: "Set Bus Profile Back to Original Setting?"  Select <b>NO</b>	NO				
8.	at the prompt: "Bus Profile left unchanged"  Select <b>OK</b> to continue	OK				
	<b>HIFI OFF</b>					

### 7.7 Instrument FDIR Enable/Disable

This section details the scripts that can be executed to enable or disable the onboard FDIR related to instruments. The scripts will disable FDIR EAT entries for PACS, SPIRE or HIFI. For these scripts it is NOT needed to run any ALL\_SubscribeParams scripts or have a connection to the IEGSE's. They are stand-alone.

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--



**7.7.3 SPIRE disable FDIR**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Run the following script:  <b>Z010999MCVT227_IST_SPIRE_DisableFDIR.tcl</b>	OK				
2.	Press “END TS” when prompted	END TS				

**7.7.4 SPIRE enable FDIR**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Run the following script:  <b>Z010999MCVT228_IST_SPIRE_EnableFDIR.tcl</b>	OK				
2.	Press “END TS” when prompted	END TS				

**7.7.5 HIFI disable FDIR**

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	-----------------	------------	------------	-----------------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to disable FDIR EAT Entries for HIFI":	OK				
2.	Run the following script:  <b>Z010999MCVT229_IST_HIFI_DisableFDIR.tcl</b>	OK				
3.	Press OK when prompted: "Verify disabled in following EAT Report, Press OK execute"					
4.	Press "END TS" when prompted	END TS				

**7.7.6 HIFI enable FDIR**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to enable FDIR EAT Entries for HIFI":	OK				
2.	Run the following script:  <b>Z010999MCVT230_IST_HIFI_EnableFDIR.tcl</b>	OK				
3.	Press OK when prompted: "Verify enabled in following EAT Report, Press OK execute"					

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>
---------------------------	--	-----------------	------------	------------	-----------------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
4.	Press "END TS" when prompted	END TS				

### 7.8 Instrument MTL Enable/Disable

This section details the scripts that can be executed to enable or disable the onboard MTL related to instruments. The scripts will enable/disable the onboard subschedules for PACS, SPIRE or HIFI. For these scripts it is NOT needed to run any ALL\_SubscribeParams scripts or have a connection to the IEGSE's. They are stand-alone.

When the script is finished, a check can be performed by running Z010999MCVT204\_MTL\_Reports.tcl and check the relevant EAT entries for the selected instrument.

#### 7.8.1 PACS disable MTL

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to Disable the subschedules for PACS (subscheduleIDs 80 and 90)":	OK				
2.	Run the following script:  <b>Z010999MCVT221_IST_PACS_Disable_Subschedules.tcl</b>	OK				

Enter Date   Time:		Sign Off	TD:	PA:	Test Location:	
--------------------	--	----------	-----	-----	----------------	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
3.	Press "END TS" when prompted	END TS				

**7.8.2 SPIRE disable MTL**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to Disable the subschedules for SPIRE (subschedulesIDs 100 and 370)":	OK				
2.	Run the following script:  <b>Z010999MCVT222_IST_SPIRE_Disable_Subschedules.tcl</b>	OK				
3.	Press "END TS" when prompted	END TS				

**7.8.3 HIFI disable MTL**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to Disable the subschedules for HIFI (subschedulesIDs 60 and 70)":	OK				
2.	Run the following script:  <b>Z010999MCVT220_IST_HIFI_Disable_Subschedules.tcl</b>	OK				

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>
---------------------------	--	-----------------	------------	------------	-----------------------

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
3.	Press "END TS" when prompted	END TS				

**7.8.4 HIFI enable MTL**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: "Press OK to Enable the subschedules for HIFI (subschedulesIDs 60 and 70)":	OK				
2.	Run the following script:  <b>Z010999MCVT223_IST_HIFI_Enable_Subschemas.tcl</b>	OK				
3.	Press "END TS" when prompted	END TS				

**7.8.5 HIFI clear MTL**

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	Press OK when prompted: " Press OK to clear all HIFI commands from the MTL (default is T0 - 96 hours to T0 96 hours)":	OK				
2.	Run the following script:  <b>Z010999MCVT224_IST_HIFI_Clear_Subschemas.tcl</b>	OK				

<b>Enter Date   Time:</b>		<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>
---------------------------	--	-----------------	------------	------------	-----------------------



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
3.	Press "END TS" when prompted	END TS				

<b>Enter Date   Time:</b>			<b>Sign Off</b>	<b>TD:</b>	<b>PA:</b>	<b>Test Location:</b>	
---------------------------	--	--	-----------------	------------	------------	-----------------------	--

Doc. No: HP-2-ASED-TP-0206

Issue: 3.0

Date: 18.12.08

File: HP-2-ASED-TP-0206\_Issue\_3.Doc



## 8 ANNEX - Script hierarchy

Detailed in the following sub-sections:

### 8.1 General

**SPIRE\_ALL\_SubscribeParams**

**HIFI\_ALL\_SubscribeParams**

**PACS\_ALL\_SubscribeParams**

**Z010999MCVT220\_IST\_HIFI\_Disable\_Subschedules**

**Z010999MCVT221\_IST\_PACS\_Disable\_Subschedules**

**Z010999MCVT222\_IST\_SPIRE\_Disable\_Subschedules**

**Z010999MCVT223\_IST\_HIFI\_Enable\_Subschedules**

**Z010999MCVT224\_IST\_HIFI\_Clear\_Subschedules**

**Z010999MCVT225\_IST\_PACS\_DisableFDIR**

**Z010999MCVT226\_IST\_PACS\_EnableFDIR**

**Z010999MCVT227\_IST\_SPIRE\_DisableFDIR**

**Z010999MCVT228\_IST\_SPIRE\_EnableFDIR**

**Z010999MCVT229\_IST\_HIFI\_DisableFDIR**

**Z010999MCVT230\_IST\_HIFI\_EnableFDIR**

### 8.2 PACS

**Z102999SCVT010\_ASDGEN\_PACSPWRON\_P**

-> P102999SCVT905\_ASDISTPACS\_PWR\_ON\_N

-> -> Z010999MMXX002UNITS\_CHECK

**Z102999SCVT011\_ASDGEN\_PACSPWROFF\_P**

-> P102999SCVT906\_ASDISTPACS\_PWR\_OFF\_N

-> -> Z010999MMXX002UNITS\_CHECK

**Z102999SCVT012\_ASDGEN\_PACSPWRON\_R**

P102999SCVT907\_ASDISTPACS\_PWR\_ON\_R

-> -> Z010999MMXX002UNITS\_CHECK

**Z102999SCVT013\_ASDGEN\_PACSPWROFF\_R**

-> P102999SCVT908\_ASDISTPACS\_PWR\_OFF\_R

-> -> Z010999MMXX002UNITS\_CHECK

**P102999SCVT904\_ASDGENPACS\_NomSpect**



P102999SCVT913\_ASDGENPACS\_BurstMode  
PACS\_SAFE\_Mode

### 8.3 SPIRE

#### Z102999SCVT004\_ASDGEN\_SPIREPWRON\_P

-> S102999SCVT017\_ASDGENSPIR\_PWR\_ON\_P  
-> -> SPIRE-IST-DBG-OFF2DPUON-SP  
-> -> SPIRE-IST-DBG-DPUON2STBY  
-> -> SPIRE-IST-DBG-LOAD-VM-TABLES  
-> -> Z010999MMXX002UNITS\_CHECK

#### Z102999SCVT005\_ASDGEN\_SPIREPWROFF\_P

-> S102999SCVT019\_ASDGENSPIR\_PWR\_OFF\_P  
-> -> SPIRE-IST-DBG-STBY2OFF  
-> -> Z010999MMXX002UNITS\_CHECK

#### Z102999SCVT006\_ASDGEN\_SPIREPWRON\_R

-> S102999SCVT018\_ASDGENSPIR\_PWR\_ON\_R  
-> -> SPIRE-IST-DBG-OFF2DPUON  
-> -> SPIRE-IST-DBG-DPUON2STBY  
-> -> SPIRE-IST-DBG-LOAD-VM-TABLES  
-> -> Z010999MMXX002UNITS\_CHECK

#### Z102999SCVT007\_ASDGEN\_SPIREPWROFF\_R

-> S102999SCVT020\_ASDGENSPIR\_PWR\_OFF\_R  
-> -> SPIRE-IST-DBG-STBY2OFF  
-> -> Z010999MMXX002UNITS\_CHECK

#### Z102999SCVT008\_ASDGEN\_SPIRESTBY2OPS

-> S102999SCVT911\_ASDDBGSPIR\_STBY2OPS  
-> -> SPIRE-IST-DBG-STBY2OPS

#### Z102999SCVT009\_ASDGEN\_SPIREOPS2STBY

-> S102999SCVT912\_ASDDBGSPIR\_OPS2STBY  
-> -> SPIRE-IST-DBG-OPS2STBY

## 8.4 HIFI Full Configuration

HIFIST\_ASED\_PatchPtvChecksum\_cold

HIFIST\_ASED\_PatchTempLimits\_cold

HIFIST\_ASED\_PatchPtvChecksum\_warm

HIFIST\_ASED\_PatchTempLimits\_warm

**Note that the above 2 scripts have to be maintained in line with latest version of HIFI script(s) HIFIST\_CCS\_conf\_ptv\_checksum\_<env>.tcl (where <env> = warm or cold) based on satellite environmental conditions.**

### Z102999SCVT014\_ASDGEN\_HIFIPWRON\_P

```
-> H102999SCVT015_ASDISTHIFI_PWR_ON_P
-> -> HIFIST_nom_Startup_force_boot_warm
-> -> HIFIST_nom_Startup_OBS_SFT_warm
-> -> HIFIST_nom_Startup_FCU_on_warm
-> -> HIFIST_nom_Startup_lasertemp_override_warm
-> -> HIFIST_nom_Startup_WBSH_on_warm
-> -> HIFIST_nom_Startup_WBSV_on_warm
-> -> HIFIST_nom_Startup_HRS_on_warm
-> -> HIFIST_nom_Startup_LCU_on_warm
-> -> HIFIST_nom_Startup_LCU_table_load_warm
-> -> HIFIST_nom_Startup_LCU_table_read_warm
-> -> Z010999MMXX002UNITS_CHECK
```

### Z102999SCVT015\_ASDGEN\_HIFIPWROFF\_P

```
-> H102999SCVT016_ASDISTHIFI_PWR_OFF_P
-> -> HIFIST_nom_Startup_FPU_standby_warm
-> -> HIFIST_nom_Startup_WBS_standby_warm
-> -> HIFIST_nom_Startup_HRS_standby_warm
-> -> HIFIST_nom_Startup_all_off_warm
-> -> Z010999MMXX002UNITS_CHECK
```

### Z102999SCVT016\_ASDGEN\_HIFIPWRON\_R

```
-> H102999SCVT017_ASDISTHIFI_PWR_ON_R
-> -> HIFIST_red_Startup_force_boot_warm
-> -> HIFIST_red_Startup_OBS_SFT_warm
-> -> HIFIST_red_Startup_FCU_on_warm
-> -> HIFIST_red_Startup_lasertemp_override_warm
-> -> HIFIST_red_Startup_WBSH_on_warm
-> -> HIFIST_red_Startup_WBSV_on_warm
-> -> HIFIST_red_Startup_HRS_on_warm
-> -> HIFIST_red_Startup_LCU_on_warm
-> -> HIFIST_red_Startup_LCU_table_load_warm
-> -> HIFIST_red_Startup_LCU_table_read_warm
-> -> Z010999MMXX002UNITS_CHECK
```

### Z102999SCVT017\_ASDGEN\_HIFIPWROFF\_R

```
-> H102999SCVT018_ASDISTHIFI_PWR_OFF_R
-> -> HIFIST_red_Startup_FPU_standby_warm
-> -> HIFIST_red_Startup_WBS_standby_warm
-> -> HIFIST_red_Startup_HRS_standby_warm
```

-> -> HIFIST\_red\_Startup\_all\_off\_warm  
-> -> Z010999MMXX002UNITS\_CHECK

**Z102999SCVT020\_ASDGEN\_HIFISTBY1\_2OPS\_P**

-> H102999SCVT028\_ASDISTHIFI\_STBY1\_2PRIME\_P  
-> -> HIFIST\_nom\_HIFI\_STBY\_2\_warm  
-> -> HIFIST\_nom\_HIFI\_Primary\_warm

**Z102999SCVT021\_ASDGEN\_HIFIOPS2\_STBY1\_P**

-> H102999SCVT029\_ASDISTHIFI\_PRIME\_2STBY1\_P  
-> -> HIFIST\_nom\_HIFI\_STBY\_2\_warm  
-> -> HIFIST\_nom\_HIFI\_STBY\_1\_warm

**Z102999SCVT022\_ASDGEN\_HIFISTBY1\_2STBY2\_P**

-> H102999SCVT032\_ASDISTHIFI\_STBY1\_2STBY2\_P  
-> -> HIFIST\_nom\_HIFI\_STBY\_2\_warm

**Z102999SCVT023\_ASDGEN\_HIFISTBY2\_2STBY1\_P**

-> H102999SCVT033\_ASDISTHIFI\_STBY2\_2STBY1\_P  
-> -> HIFIST\_nom\_HIFI\_STBY\_1\_warm

## 8.5 HIFI ICU Configuration

H102999SCVT009\_ASDGENHIFI\_ICU\_ON\_P

H102999SCVT010\_ASDGENHIFI\_ICU\_OFF\_P

H102999SCVT011\_ASDGENHIFI\_ICU\_ON\_R

H102999SCVT012\_ASDGENHIFI\_ICU\_OFF\_R

H102999SCVT030\_ASDISTHIFI\_ICUON\_2SIMSCI

H102999SCVT031\_ASDISTHIFI\_SIMSCI\_2ICUON

**8.6 Procedure Variation Summary**

	Test Change	Curr. No.:	
		Date	
		Page	of
Test designation	Test Procedure	Issue	Rev.
Test step changed	Reason for Change		
Prepared by:	Resp. Test Leader	Project Engineer	
PA/QA	Prime	Customer	

Table 8.6-1: Procedure Variation Sheet

**8.7 Non Conformance Report (NCR/SPR) Summary**

NCR/SPR - No.	NCR/SPR - Title	Date	Open Closed	PA sig.

Table 8.7-1: Non-Conformance Record Sheet

**8.8 Sign-off Sheet**

	<b>Date</b>	<b>Signature</b>
<b>Test Director</b>		
<b>Test Conductor</b>		
<b>PA Responsible</b>		
<b>ESA Representative</b>		



END OF DOCUMENT

	Name	Dep./Comp.		Name	Dep./Comp.
	Baldock Richard	FAE12	X	Sonn Nico	ASG51
	Barlage Bernhard	AED13		Steininger Eric	AED321
	Bayer Thomas	ASA42	X	Stritter Rene	AED11
	Brune Holger	ASA45		Suess Rudi	OTN/ASA44
X	Chen Bing	HE Space	X	Theunissen Martijn	DSSA
x	Davis William	Captec	X	Vascotto Riccardo	HE Space
	Edelhoff Dirk	AED21		Wagner Klaus	ASG23
	Fehringer Alexander	ASG15	X	Wietbrock Walter	AET12
X	Fricke Wolfgang Dr.	AED 65		Wöhler Hans	ASG23
	Geiger Hermann	ASA42		Wössner Ulrich	ASE252
	Grasl Andreas	OTN/ASA44		Zumstein Armin	AED15
	Grasshoff Brigitte	AET12			
X	Hamer Simon	Terma			
X	Hanka, Erhard	FI522			
X	Hendrikse Jeffrey	HE Space			
X	Hendry David	Terma			
	Hengstler Reinhold	ASA42			
	Hinger Jürgen	ASG23			
X	Hohn Rüdiger	AED65			
	Hopfgarten Michael	AET32			
	Huber Johann	ASA42			
	Hund Walter	ASE252			
X	Idler Siegmund	AED312			
	Ivány von András	FAE12			
	Jahn Gerd Dr.	ASG23			
	Jolk Matthias	AET1	X	ESA/ESTEC	ESA
X	Klenke Uwe	ASG72	X	Thales Alenia Space Cannes	TAS-F
X	Kölle Markus	ASA43		Thales Alenia Space Torino	TAS-I
	König Werner	AET32			
X	Koppe Axel	AED312			
	Kroeker Jürgen	AED65		<b>Instruments:</b>	
X	La Gioia Valentina	Terma	X	MPE (PACS)	MPE
	Lang Jürgen	ASE252	X	RAL (SPIRE)	RAL
	Langenstein Rolf	AED15	X	SRON (HIFI)	SRON
	Langfermann Michael	ASA41			
	Leitermann Stefan	AET12			
X	Liberatore Danilo	Rhea		<b>Subcontractors:</b>	
X	Martin Olivier	Altec		Austrian Aerospace	AAE
X	Maukisch Jan	ASA43		Austrian Aerospace	AAEM
X	Much Christoph	ASA43		BOC Edwards	BOCE
X	Müller Martin	ASA43		Dutch Space Solar Arrays	DSSA
	Pietroboni Karin	AED65		EADS Astrium Sub-Subsyst. & Equipment	ASSE
	Reichle Konrad	ASA42		EADS CASA Espacio	CASA
	Runge Axel	OTN/ASA44		EADS CASA Espacio	ECAS
	Saal Christoph	External		European Test Services	ETS
	Schink Dietmar	AED321		Patria New Technologies Oy	PANT
	Schmidt Thomas	AED15		SENER Ingenieria SA	SEN
	Schweickert Gunn	ASG23		Thales Alenia Space, Antwerp	TAS-ETCA