

FPU functional test
 File: H_COP_HIF_NFF6.xls
 Author: R. Biggins



Procedure Summary

Objectives

The objective of this procedure is to execute a functional test on band 6a of the FPU
 - Initialise FPU

Based on procedure:
 HIFI-COP-1.2-FPU_FT (v6)

Summary of Constraints

Real-time science packets should be enabled for downlink for HIFI analysis

Spacecraft Configuration

Start of Procedure

n/a

End of Procedure

n/a

Reference File(s)

Input Command Sequences

Output Command Sequences

HCHNFF6

Referenced Displays

ANDs **GRDs** **SLDs**
 ZAZ9C999


Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
27/10/08	2	1	Created	R. Biggins	
24/02/09	2.1	1.01	Validation : Updates due to SVT-2/SOVT-2 testing <input type="checkbox"/> - Summary updated	R. Biggins	

FPU functional test
File: H_COP_HIF_NFF6.xls
Author: R. Biggins



Procedure Flowchart Overview

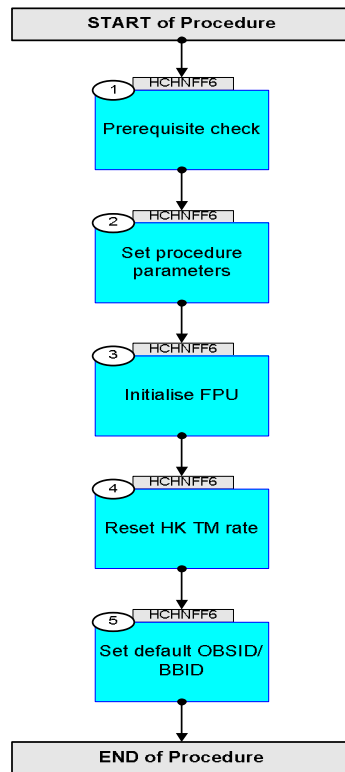

FPU functional test
 File: H_COP_HIF_NFF6.xls
 Author: R. Biggins



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
Beginning of Procedure				
TC Seq. Name : HCHNFF6 (FPU functional test)				
TimeTag Type: B Sub Schedule ID: □				
1		Prerequisite check		Next Step: 2
1.1		HSC/ICC input		□
		Verify that the HSC has supplied a valid OBSID value: OBS_ID = 0xnnnn nnnn		
2		Set procedure parameters		Next Step: 3
	ET=+00.00.01 UT=+00.00.01	HIFI_Set_OBS_ID Command Parameter(s) : HIFI_BB_ID HP001197 HIFI_OBS_ID HP000197 Subsch. ID : 70 Det. descr. : Set Observation-ID and Building-Block-ID	HIFI_Set_OBS_ID HC014289	17700001 <hex> OBS_ID
		Verify Telemetry BB_ID_per_hk HM004190	= 17700001 <hex>	AND=ZAZ9C999
		Verify Telemetry OBS_ID_per_hk HM003190	OBS_ID	AND=ZAZ9C999
	ET=+00.00.00 UT=+00.00.00	HIFI_Housekeeping_on Command Parameter(s) : HIF_HK_rate HP012197 HIF_FCU_S HP006197 HIF_LCU_S HP007197 HIF_WBSV_S HP009197 HIF_WBSH_S HP008197 HIF_HRSV_S HP011197 HIF_HRSH_S HP010197 Subsch. ID : 70 Det. descr. : Sets periodic housekeeping packet generation period	HIFI_Housekeeping_on HC016289	1_pkt_per_s ON (Def) ON (Def) ON (Def) ON (Def) ON (Def) ON (Def)

FPU functional test
 File: H_COP_HIF_NFF6.xls
 Author: R. Biggins



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		Verify: The following TM(3,25) packets should be produced once every second: HIFI_essential_HK (APID 1024) HIFI_HK_rev_7 (APID 1026)		
3		Initialise FPU		Next Step: 4
	ET=+00.00.01 UT=+00.00.01	HIFI_Configure_FCU_Power HIFI_Configure_FCU_Power <i>Command Parameter(s) :</i> HIFI_BB_ID HP001197 HF_CPR_Mixer_H_S HP203191 HF_CPR_Mixer_V_S HP204191 HF_CPR_Chopper_S HP205191 HF_CPR_UCH_S HP206191 HF_CPR_UCV_S HP207191 <i>Subsch. ID : 70</i> <i>Det. descr. : Switch ON or OFF the five FCU-boards (mixer H/V, chopper, IF HV)</i>	HC027289 1C200001 <hex> ON (Def) ON (Def) ON (Def) ON (Def) ON (Def)	
		Verify Telemetry BB_ID_per_hk HM004190	= 1C200001 <hex>	AND=ZAZ9C999
	ET=+00.00.00 UT=+00.00.00	HIFI_P_Configure_FCU HIFI_P_Configure_FCU <i>Command Parameter(s) :</i> HIFI_BB_ID HP001197 HF_CPR_MXBAND HP202191 HF_CH1_DPFPF1 HP176191 HF_CH2_FIF1_Drain_V HP177191 HF_CH2_FIF1_Drain_C HP178191 HF_CH2_FIF2_Drain_V HP179191 HF_CH2_FIF2_Drain_C HP180191 HF_CH2_SIF1_Drain_V HP181191 HF_CH2_SIF1_Drain_C HP182191 HF_CH2_SIF2_Drain_V HP183191 HF_CH2_SIF2_Drain_C HP184191 HF_CH2_SIF3_Drain_V HP185191 HF_CH2_SIF3_Drain_C HP186191 HF_CV1_DPFPF1 HP191191 HF_CV2_FIF1_Drain_V HP192191 HF_CV2_FIF1_Drain_C HP193191 HF_CV2_FIF2_Drain_V HP194191 HF_CV2_FIF2_Drain_C HP195191 HF_CV2_SIF1_Drain_V HP196191 HF_CV2_SIF1_Drain_C HP197191 HF_CV2_SIF2_Drain_V HP198191 HF_CV2_SIF2_Drain_C HP199191 HF_CV2_SIF3_Drain_V HP200191 HF_CV2_SIF3_Drain_C HP201191 HF_CPR_CH_SINE_S HP211191 HF_CPR_CH_LOOP_S HP210191	HC182289 1C200001 <hex> 6 <dec> 227 <dec> (Def) 0.75 V 4.0 mA 0.65 V 3.0 mA 0.57 V 3.5 mA 0.8 V 1.85 mA 0.57 V 3.5 mA 227 <dec> (Def) 0.75 V 4.0 mA 0.65 V 3.0 mA 0.57 V 3.5 mA 0.57 V 3.5 mA 0.57 V 3.5 mA 0.57 V 3.5 mA ON (Def) CLOSE (Def)	

FPU functional test
 File: H_COP_HIF_NFF6.xls
 Author: R. Biggins



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		HF_CPR_CHFPG1 HP212191 HF_CPR_CHFPG2 HP213191 HF_CPR_CHFPZ1 HP214191 HF_CPR_CHFPZ2 HP215191 HF_CPR_CHFPP2 HP216191 HF_CPR_Cal_Heater_C HP217191 HF_CH1_MXBIAS_V HP172191 HF_CH1_MX_MG_C HP173191 HF_CV1_MXBIAS_V HP187191 HF_CV1_MX_MG_C HP188191 HF_P_Chopper_Rot HP454191 HF_CH1_DPACT_C HP174191 HF_CV1_DPACT_C HP189191 Subsch. ID : 70 Det. descr. : Configure the FCU-subsystem (prime)	17 <dec> 201 <dec> 1010 <dec> 885 <dec> 149 <dec> 1.1 mA 6.0 mV 0.0 mA (Def) 6.0 mV 0.0 mA (Def) -1.07 V -1.057 mA 0.033 mA	
	ET=+00.00.03 UT=+00.00.03	HIFI_CH1_MXBIAS_V HIFI_CH1_MXBIAS_V Command Parameter(s) : HIFI_BB_ID HP001197 HF_CH1_MXBIAS_V HP172191 Subsch. ID : 70 Det. descr. : Send single command to set H mixer bias voltage	HC095289 1C200001 <hex> 0.6 mV	
	ET=+00.00.00 UT=+00.00.00	HIFI_CV1_MXBIAS_V HIFI_CV1_MXBIAS_V Command Parameter(s) : HIFI_BB_ID HP001197 HF_CV1_MXBIAS_V HP187191 Subsch. ID : 70 Det. descr. : Send single command to set V mixer bias voltage	HC098289 1C200001 <hex> 0.6 mV	
		Verify: Verify the content of the following ANDs with the HIFI representative:		
		HA038289 FCU_H_device HA039289 FCU_V_device HA042289 FCU_PR_power HA044289 FCU_common		
4		Reset HK TM rate		Next Step: 5

FPU functional test
 File: H_COP_HIF_NFF6.xls
 Author: R. Biggins



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
	ET=+00.00.01 UT=+00.00.01	HIFI_Housekeeping_on HIFI_Housekeeping_on Command Parameter(s) : HIF_HK_rate HP012197 1_pkt_per_4_s HIF_FCU_S HP006197 ON (Def) HIF_LCU_S HP007197 ON (Def) HIF_WBSV_S HP009197 ON (Def) HIF_WBSH_S HP008197 ON (Def) HIF_HRSV_S HP011197 ON (Def) HIF_HRSH_S HP010197 ON (Def) Subsch. ID : 70 Det. descr. : Sets periodic housekeeping packet generation period	HC016289	
		Verify: The following TM(3,25) packets should be produced once every 4 seconds: HIFI_essential_HK (APID 1024) HIFI_HK_rev_7 (APID 1026)		
5		Set default OBSID/BBID		Next Step: END
	ET=+00.00.01 UT=+00.00.01	HIFI_Set_OBS_ID HIFI_Set_OBS_ID Command Parameter(s) : HIFI_BB_ID HP001197 0 <hex> (Def) HIFI_OBS_ID HP000197 0 <hex> (Def) Subsch. ID : 70 Det. descr. : Set Observation-ID and Building-Block-ID	HC014289	
		Verify Telemetry BB_ID_per_hk HM004190 = 0 <hex>		AND=ZAZ9C999
		Verify Telemetry OBS_ID_per_hk HM003190 = 0 <hex>		AND=ZAZ9C999
End of Procedure				