

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: Liviu Stefanov



## Procedure Summary

### Objectives

This Herschel OBSM nominal procedure is used to perform the dump monitoring of one or several PACS DPU PRAM memory areas. The memory dump is commanded using TC(6,5) and the memory locations content is received on ground in TM(6,6) packets.

The procedure assumes that the command stack has already been generated using the OBSM system and is ready for loading on the Manual Stack. The command stack generation activity is not covered by this procedure.

### Summary of Constraints

- CDMU in Operational Mode
- PACS in INIT mode (DPU ASW running)
- Memory areas are dumped through TC(6,5); this TC will be delayed when there is an ongoing:
- TC(6,2) Load Memory Using Absolute Addresses
  - TC(6,5) Dump Memory Using Absolute Addresses
  - TC(6,9) Check Memory Using Absolute Addresses
  - TC(8,4,1,1) Copy Memory

### Spacecraft Configuration

**Start of Procedure**

- CDMU in Operational Mode
- PACS in INIT mode (DPU ASW running)

**End of Procedure**

- Same as start except:
- PACS DPU PRAM dump executed

### Reference File(s)

**Input Command Sequences**

**Output Command Sequences**

OFCP4142

### Referenced Displays

ANDs      GRDs      SLDs

### Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
30/01/08	1	1	Created	Istefanov-hp	

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: Liviu Stefanov




01/09/08		2	1. added current steps 3.1 and 3.2 to separate dump stack load for PACS Nom and Red 2. added steps 4.2.1 and 4.2.2 to separate image selection for PACS Nom and Red 3. changed name of 2nd TC sequence: OFCP414A changed to OFCP414C 4. added steps 8.2.1 and 8.2.2 to separate image selection for PACS Nom and Red	Istefanov-hp	
01/09/08	2	3	1. step 3.3 updated: corrected typo in 2nd comment - TM param. replaced by TC param.	Istefanov-hp	
24/07/09	2.5	4	1. step 3 updated to include addresses and lengths for PACS DPU OBS v.9.04 image dump from PM-Low 2. step 3: added comment indicating the OBSM CT used to monitor only seg_init and seg_pmco dump	Istefanov-hp	

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: lstefanov-hp



## Procedure Flowchart Overview

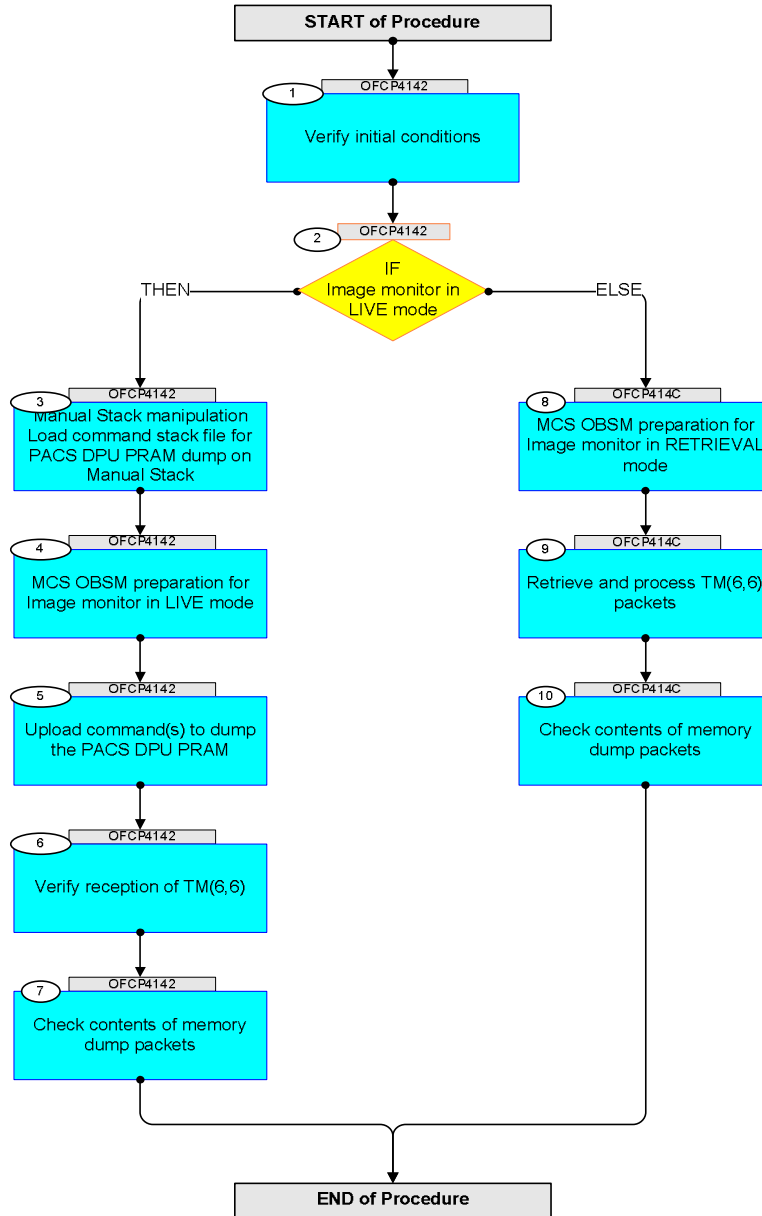

Monitor dump of PACS DPU PRAM memory area File: H_FCP_OBS_4142.xls Author: lstefanov-hp	
---	--

Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
<b>Beginning of Procedure</b>					
OFCP4142		TC Seq. Name : OFCP4142 ( ) PACS DPU PRAM dump monitoring in Live mode  TimeTag Type: B Sub Schedule ID:  <input type="checkbox"/>			
1		Verify initial conditions		Next Step: 2	
		Check PACS instrument in <b>INIT mode</b> (DPU ASW running)			
		Instrument SOE to confirm PACS instrument mode			
2		IF Image monitor in LIVE mode  type: [If]		Next Step: THEN 3 ELSE 8	
3		Manual Stack manipulation Load command stack file for PACS DPU PRAM dump on Manual Stack		Next Step: 4	
		<b>NOTE:</b> The current procedure assumes that the memory dump in Live mode is performed using commands with immediate execution.			
		Select the File -> <b>LoadStack</b> option from the main menu of the Manual Stack window			
3.1		IF PACS Nominal			
		Select file  <b>PADPRMPR_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmss.machine</b>  from directory  <a href="#">/home/pmcops/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PADPRMPR</a>  as indicated by the OBSM engineer			
		<b>IMPORTANT:</b>  <b>XXXXYYY</b> = Image ID(X) and Version(Y) - depend on image used for stack generation  <b>YYYY_DDD hhmss</b> - depend on stack generation time  <b>machine</b> - depends on the name of the machine used for stack generation			

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: lstefanov-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
		File name <b>examples</b> - No model associated to the memory image: PADPRMPR_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PADPRMPR1, ID 0003, Version 001 associated to the memory image: PADPRMPR_DI_0002001_C_PADPRMPR1_0003001_2007_337T093320.sun043			
3.2		ELSE PACS Redundant			
		Select file <b>PADRMPPR_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmmss.machine</b> from directory <a href="#">/home/pmcops/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PADRMPPR</a> as indicated by the OBSM engineer			
		IMPORTANT: XXXXYYY = Image ID(X) and Version(Y) - depend on image used for stack generation YYYY_DDD hhmmss - depend on stack generation time machine - depends on the name of the machine used for stack generation			
		File name <b>examples</b> - No model associated to the memory image: PADRMPPR_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PADRMPPR1, ID 0003, Version 001 associated to the memory image: PADRMPPR_DI_0002001_C_PADMPPR1_0003001_2007_337T093320.sun043			
3.3		Check command stack loaded			
		Check that loaded stack contains one or several TCs <b>PC028380</b>			
		<b>Note:</b> For PACS DPU OBS v.9.04, the memory area to be dumped for <b>PM-Low</b> image is: Start Address = 00.0000 hex End Address = 01.0CB4 hex Length = 10CB5 hex			

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: lstefanov-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment																				
		<p><b>Note:</b>            For PACS DPU OBS v.9.04, the 2 TCs PC028380 used to dump the OBS image from PM-Low will have the following parameters:</p> <p>First TC PC028380:  <b>Start Address</b> = 00.0000 hex  <b>Length</b> = FFFF hex</p> <p>Second TC PC028380:  <b>Start Address</b> = 00.FFFF hex  <b>Length</b> = CB6 hex</p>																							
		<p><b>Note:</b>            Only the <b>seg_init</b> and <b>seg_pmco</b> memory areas will be <b>monitored</b> against the ground reference image.</p> <p>An OBSM <b>Configuration Table</b> memory model will be used to declare the following PACS DPU PRAM areas "<b>To Be Monitored</b>":</p> <p>For PACS DPU OBS v.9.04:</p> <p>seg_init  <b>Start Address</b> = 00.4000 hex  <b>Length</b> = 1551 hex</p> <p>seg_pmco  <b>Start Address</b> = 00.5551 hex  <b>Length</b> = B764 hex</p>																							
		<p>Display the Manual Stack in 'Full mode' and check that the <b>Memory ID</b> parameter in the PC028380 command(s) is set to <b>01 hex</b>:</p> <p><b>Memory ID = 01 hex</b></p> <p><b>Note:</b>            The Memory ID of the target memory device is stored in the MSB of the 16-bit long Mem ID TC parameter. The LSB of the same parameter carries the most significant 8 bits of the Start Address.</p>																							
		<p>Execute Telecommand</p> <p style="text-align: center;"><b>DPU_MEMORY_DUMP</b></p> <p>Command Parameter(s) :</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 40%;">DPU_MEMORY_BLOCK_ID</td> <td style="width: 20%;">PP009380</td> <td style="width: 20%;">01xx hex</td> <td style="width: 20%;"></td> </tr> <tr> <td>DPU_MEMORY_ADDR</td> <td>PP003380</td> <td>&lt;hex&gt; (Def)</td> <td></td> </tr> <tr> <td>DPU_DATA_LENGTH</td> <td>PP008380</td> <td>&lt;dec&gt; (Def)</td> <td></td> </tr> </table> <p>TC Control Flags :</p> <table style="width: 100%; border: none;"> <tr> <td style="width: 40%;"></td> <td style="width: 20%;">GBM IL DSE</td> <td style="width: 20%;"></td> <td style="width: 20%;"></td> </tr> <tr> <td></td> <td>--Y -- ---</td> <td></td> <td></td> </tr> </table> <p>Subsch. ID : 90            Det. descr. : DUMP OF A DPU MEMORY AREA            This Telecommand will not be included in the export</p>	DPU_MEMORY_BLOCK_ID	PP009380	01xx hex		DPU_MEMORY_ADDR	PP003380	<hex> (Def)		DPU_DATA_LENGTH	PP008380	<dec> (Def)			GBM IL DSE				--Y -- ---			PC028380	TC	
DPU_MEMORY_BLOCK_ID	PP009380	01xx hex																							
DPU_MEMORY_ADDR	PP003380	<hex> (Def)																							
DPU_DATA_LENGTH	PP008380	<dec> (Def)																							
	GBM IL DSE																								
	--Y -- ---																								
4		MCS OBSM preparation for Image monitor in LIVE mode		Next Step: 5																					
		<p><b>Note:</b>            It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client. Starting the OBSM application is not covered by the current procedure.</p>																							
4.1		Select 'Image MONITOR' from the menu																							

Monitor dump of PACS DPU PRAM memory area File: H_FCP_OBS_4142.xls Author: lstefanov-hp	
---	--

Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
		Select the <b>Image</b> menu of the <i>OBSM Desktop</i> .  From the Image menu, select <b>Monitor</b> .  The 'Image Catalog' window opens.			
4.2		Select image to be monitored			
4.2.1		IF PACS Nominal			
		Select the image to be monitored for the memory device <b>PADPRMPR</b> .  The 'Image MONITOR' window opens.			
4.2.2		ELSE PACS Redundant			
		Select the image to be monitored for the memory device <b>PADPRMPR</b> .  The 'Image MONITOR' window opens.			
4.3		Start dump TM processing			
		In <b>LIVE</b> mode, processing of incoming real-time telemetry starts automatically after the image selection.			
5		Upload command(s) to dump the PACS DPU PRAM		Next Step: 6	
		<b>Uplink</b> the <b>PC028380</b> memory dump command(s) with <b>ARM-GO</b>			
		For each command, one or more TM(6,6) packets must be received on ground.			
6		Verify reception of TM(6,6)		Next Step: 7	
		<b>Note:</b> One or more TM(6,6) packets will be received for each memory dump command uplinked.			

Monitor dump of PACS DPU PRAM memory area File: H_FCP_OBS_4142.xls Author: lstefanov-hp	
---	--

Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
6.1		IF PACS Prime			
		Verify Packet Reception  MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1152 Type : 6 Subtype : 6 PI1 : PI2 :			
6.2		ELSE PACS Redundant			
		Verify Packet Reception  MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1153 Type : 6 Subtype : 6 PI1 : PI2 :			
6.3		Check OBSM dump packet processing			
		Check that the OBSM is processing the incoming memory dump packets.			
7		Check contents of memory dump packets		Next Step: END	
		Verify that there are <b>NO OBSM reported differences</b> between the memory dump data and the ground image used for monitoring.			
		<b>IF</b> there are <b>differences</b> reported by OBSM between the dump data and the ground image, <b>the merged image shall be saved</b> for offline analysis.			
7.1		Save merged image			
		<b>IF</b> there are <b>mismatches</b> reported by OBSM, save merged image with <b>new ID</b> .			
		Conduct off-line analysis of the reported mismatches.			
End of Sequence					



Monitor dump of PACS DPU PRAM memory area File: H_FCP_OBS_4142.xls Author: lstefanov-hp	 
---	--

Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
<p>TC Seq. Name : OFCP414C ( )            PACS DPU PRAM dump monitoring in Retrieval mode</p> <p>TimeTag Type:            Sub Schedule ID:</p> <p style="text-align: center;">□</p>					
8		MCS OBSM preparation for Image monitor in RETRIEVAL mode		Next Step: 9	
		<p><b>Note:</b>            It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client.            Starting the OBSM application is not covered by the current procedure.</p>			
8.1		Select 'Image MONITOR' from the menu			
		<p>Select the <b>Image</b> menu of the <b>OBSM Desktop</b>.</p> <p>From the Image menu, select <b>Monitor</b>.</p> <p>The 'Image Catalog' window opens.</p>			
8.2		Select image to be monitored			
8.2.1		IF PACS Nominal			
		<p>Select the image to be monitored for the memory device <b>PADPRMPR</b>.</p> <p>The 'Image MONITOR' window opens.</p>			
8.2.2		ELSE PACS Redundant			
		<p>Select the image to be monitored for the memory device <b>PADPRMPR</b>.</p> <p>The 'Image MONITOR' window opens.</p>			
8.3		Start dump TM packets processing			
		Set retrieval start time and start retrieval of TM packets using the PLAY buttons.			

Monitor dump of PACS DPU PRAM memory area  
 File: H\_FCP\_OBS\_4142.xls  
 Author: lstefanov-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch	AIT Comment
9		Retrieve and process TM(6,6) packets		Next Step: 10	
		Use the <b>STEP</b> button to retrieve and process the TM(6,6) packets, packet by packet and starting from the time shown in the packet time field.			
		OR			
		Use the <b>PLAY</b> button to retrieve and process the TM(6,6) packets in automated mode.  Pressing the PLAY button, the display will start to retrieve and process packets, starting from the time shown in the packet time field. This processing will stop automatically when a packet is received which creation time is greater than the one contained in the end time field.			
10		Check contents of memory dump packets		Next Step: END	
		Verify that there are <b>NO OBSM reported differences</b> between the memory dump data and the ground image used for monitoring.			
		<b>IF</b> there are <b>differences</b> reported by OBSM between the dump data and the ground image, <b>the merged image shall be saved</b> for further analysis.			
10.1		Save merged image			
		<b>IF</b> there are <b>mismatches</b> reported by OBSM, save merged image with <b>new ID</b> .			
		Conduct off-line analysis of the reported mismatches.			
End of Sequence					
<b>End of Procedure</b>					