

Monitor dump of PACS SPU PRAM memory area
File: H_FCP_OBS_4242.xls
Author: lstefanov-hp



Procedure Summary

Objectives

This Herschel OBSM nominal procedure is used to perform the dump monitoring of one or several PACS SPU PRAM memory areas. It is used for both SPU SWL and SPU LWL subsystems. The memory dump is commanded using TC(6,5) and the memory locations content is received on ground in TM(6,6) packets.

The procedure assumes that the command stack has already been generated using the OBSM system and is ready for loading on the Manual Stack. The command stack generation activity is not covered by this procedure.

Summary of Constraints

CDMU in Operational Mode

- PACS instrument in INIT mode (DPU ASW running)
- SPU ON
- DPU-SPU connection established

Memory areas are Dumped through TC(6,5); this TC will be delayed when there is an ongoing:

- TC(6,2) Load Memory Using Absolute Addresses
- TC(6,5) Dump Memory Using Absolute Addresses
- TC(6,9) Check Memory Using Absolute Addresses
- TC(8,4,1,1) Copy Memory

Spacecraft Configuration

Start of Procedure

CDMU in Operational Mode

- PACS instrument in INIT mode (DPU ASW running)
- SPU ON
- DPU-SPU connection established

End of Procedure

Same as start

Reference File(s)

Input Command Sequences

Output Command Sequences

OFCP424I
OFCP424K

Referenced Displays

ANDs GRDs SLDs

Configuration Control Information

Monitor dump of PACS SPU PRAM memory area
File: H_FCP_OBS_4242.xls
Author: lstefanov-hp




| DATE | FOP ISSUE | VERSION | MODIFICATION DESCRIPTION | AUTHOR | SPR REF |
|----------|-----------|---------|--------------------------|--------------|---------|
| 05/09/08 | 2 | 1 | Created | lstefanov-hp | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



Procedure Flowchart Overview

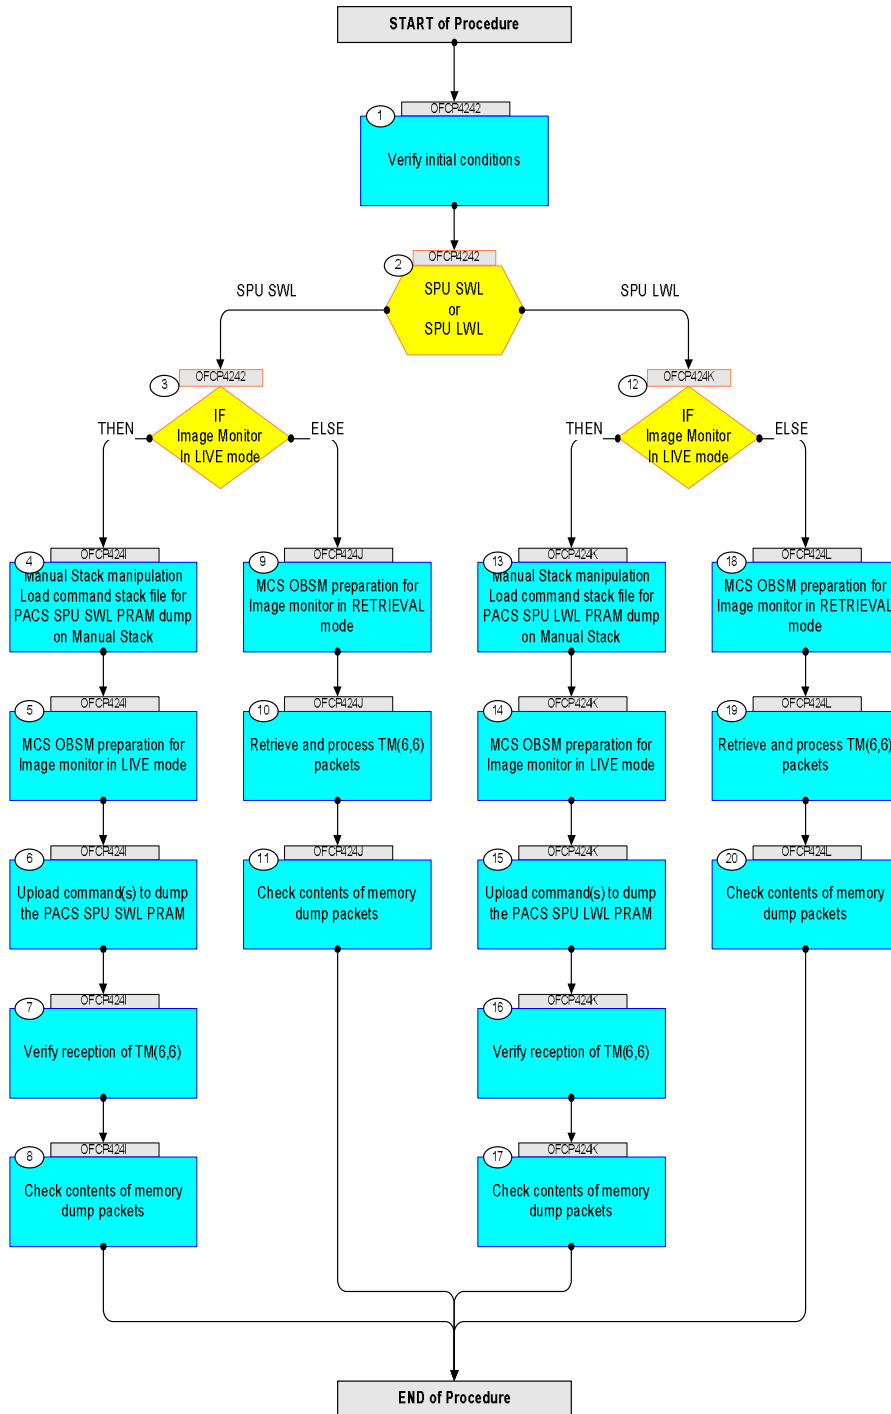

| | |
|---|--|
| Monitor dump of PACS SPU PRAM memory area File: H_FCP_OBS_4242.xls Author: lstefanov-hp |  |
|---|--|

| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|---|------|---|--------|---------------------------------------|-------------|
| Beginning of Procedure | | | | | |
| OFCP4242 TC Seq. Name : OFCP4242 () PACS SPU PRAM dump monitoring TimeTag Type: B Sub Schedule ID: <input type="checkbox"/> | | | | | |
| 1 | | Verify initial conditions | | Next Step: 2 | |
| | | Check: - PACS instrument in INIT mode (DPU ASW running) - SPU ON - DPU-SPU connection established | | | |
| | | Instrument SOE to confirm PACS instrument mode and SPU status. | | | |
| 2 | | SPU SWL or SPU LWL type: [Switch] | | Next Step: SPU SWL 3 SPU LWL 12 | |
| 3 | | IF Image Monitor In LIVE mode type: [If] | | Next Step: THEN 4 ELSE 9 | |
| End of Sequence OFCP424I TC Seq. Name : OFCP424I () PACS SPU SWL PRAM dump monitoring in LIVE mode TimeTag Type: B Sub Schedule ID: <input type="checkbox"/> | | | | | |
| 4 | | Manual Stack manipulation Load command stack file for PACS SPU SWL PRAM dump on Manual Stack | | Next Step: 5 | |
| | | NOTE: The current procedure assumes that the memory dump in Live mode is performed using commands with immediate execution. | | | |
| | | Select the File -> LoadStack option from the main menu of the Manual Stack window | | | |
| 4.1 | | IF PACS Nominal | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|---|--------|-----------------|-------------|
| | | Select file PASPRMSW_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmmss.machine from directory /home/pmcsopts/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PASPRMSW as indicated by the OBSM engineer | | | |
| | | IMPORTANT: XXXXYYY = Image ID(X) and Version(Y) - depend on image used for stack generation YYYY_DDD hhmmss - depend on stack generation time machine - depends on the name of the machine used for stack generation | | | |
| | | File name examples - No model associated to the memory image: PASPRMSW_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PASPRMSW1, ID 0003, Version 001 associated to the memory image: PASPRMSW_DI_0002001_C_PASPRMSW1_0003001_2007_337T093320.sun043 | | | |
| 4.2 | | ELSE PACS Redundant | | | |
| | | Select file PASRMSWR_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmmss.machine from directory /home/pmcsopts/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PASRMSWR as indicated by the OBSM engineer | | | |
| | | IMPORTANT: XXXXYYY = Image ID(X) and Version(Y) - depend on image used for stack generation YYYY_DDD hhmmss - depend on stack generation time machine - depends on the name of the machine used for stack generation | | | |
| | | File name examples - No model associated to the memory image: PASRMSWR_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PASRMSWR1, ID 0003, Version 001 associated to the memory image: PASRMSWR_DI_0002001_C_PASRMSWR1_0003001_2007_337T093320.sun043 | | | |

| | |
|---|--|
| Monitor dump of PACS SPU PRAM memory area File: H_FCP_OBS_4242.xls Author: lstefanov-hp |  |
|---|--|

| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment | | | | | | | | | | | | | |
|----------------------------|----------|---|----------------------------|-----------------|-----------------|------------------------|----------|-------------|------------------------|----------|-------------|-------------------|--|-------------------|--|-----------------|----|--|
| 4.3 | | Check command stack loaded | | | | | | | | | | | | | | | | |
| | | Check that loaded stack contains one or several TCs PC028380 | | | | | | | | | | | | | | | | |
| | | Display the Manual Stack in 'Full mode' and check that the Memory ID parameter in the PC028380 command(s) is set to 41 hex : Memory ID = 41 hex Note: The Memory ID of the target memory device is stored in the MSB of the 16-bit long Mem ID TC parameter. The LSB of the same parameter carries the most significant 8 bits of the Start Address. | | | | | | | | | | | | | | | | |
| | | Execute Telecommand <div style="text-align: center;">DPU_MEMORY_DUMP</div> <i>Command Parameter(s) :</i> <table style="margin-left: 40px; border: none;"> <tr> <td>DPU_MEMORY_BLOCK_ID</td> <td>PP009380</td> <td>41xx hex</td> </tr> <tr> <td>DPU_MEMORY_ADDR</td> <td>PP003380</td> <td><hex> (Def)</td> </tr> <tr> <td>DPU_DATA_LENGTH</td> <td>PP008380</td> <td><dec> (Def)</td> </tr> </table> <i>TC Control Flags :</i> <table style="margin-left: 40px; border: none;"> <tr> <td>GBM IL DSE</td> <td></td> </tr> <tr> <td>--Y -- ---</td> <td></td> </tr> </table> <i>Subsch. ID : 90</i> <i>Det. descr. : DUMP OF A DPU MEMORY AREA</i> This Telecommand will not be included in the export | DPU_MEMORY_BLOCK_ID | PP009380 | 41xx hex | DPU_MEMORY_ADDR | PP003380 | <hex> (Def) | DPU_DATA_LENGTH | PP008380 | <dec> (Def) | GBM IL DSE | | --Y -- --- | | PC028380 | TC | |
| DPU_MEMORY_BLOCK_ID | PP009380 | 41xx hex | | | | | | | | | | | | | | | | |
| DPU_MEMORY_ADDR | PP003380 | <hex> (Def) | | | | | | | | | | | | | | | | |
| DPU_DATA_LENGTH | PP008380 | <dec> (Def) | | | | | | | | | | | | | | | | |
| GBM IL DSE | | | | | | | | | | | | | | | | | | |
| --Y -- --- | | | | | | | | | | | | | | | | | | |
| 5 | | MCS OBSM preparation for Image monitor in LIVE mode | | Next Step: 6 | | | | | | | | | | | | | | |
| | | Note: It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client. Starting the OBSM application is not covered by the current procedure. | | | | | | | | | | | | | | | | |
| 5.1 | | Select 'Image MONITOR' from the menu | | | | | | | | | | | | | | | | |
| | | Select the Image menu of the OBSM Desktop . From the Image menu, select Monitor . The 'Image Catalog' window opens. | | | | | | | | | | | | | | | | |
| 5.2 | | Select image to be monitored | | | | | | | | | | | | | | | | |
| 5.2.1 | | IF PACS Nominal | | | | | | | | | | | | | | | | |

| | |
|---|--|
| Monitor dump of PACS SPU PRAM memory area File: H_FCP_OBS_4242.xls Author: lstefanov-hp |   |
|---|--|

| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|---|--------|-----------------|-------------|
| | | Select the image to be monitored for the memory device PASPRMSW . The 'Image MONITOR' window opens. | | | |
| 5.2.2 | | ELSE PACS Redundant | | | |
| | | Select the image to be monitored for the memory device PASRMSWR . The 'Image MONITOR' window opens. | | | |
| 5.3 | | Start dump TM processing | | | |
| | | In LIVE mode, processing of incoming real-time telemetry starts automatically after the image selection. | | | |
| 6 | | Upload command(s) to dump the PACS SPU SWL PRAM | | Next Step: 7 | |
| | | Uplink the PC028380 memory dump command(s) with ARM-GO | | | |
| | | For each command, one or more TM(6,6) packets must be received on ground. | | | |
| 7 | | Verify reception of TM(6,6) | | Next Step: 8 | |
| | | Note: One or more TM(6,6) packets will be received for each memory dump command uplinked. | | | |
| 7.1 | | IF PACS Prime | | | |
| | | Verify Packet Reception MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1152 Type : 6 Subtype : 6 PI1 : PI2 : | | | |
| 7.2 | | ELSE PACS Redundant | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|--|------|---|--------|-------------------|-------------|
| | | Verify Packet Reception MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1153 Type : 6 Subtype : 6 PI1 : PI2 : | | | |
| 8 | | Check contents of memory dump packets | | Next Step: END | |
| | | Verify that there are NO OBSM reported differences between the memory dump data and the ground image used for monitoring. | | | |
| | | IF there are differences reported by OBSM between the dump data and the ground image, the merged image shall be saved for offline analysis. | | | |
| 8.1 | | Save merged image | | | |
| | | IF there are mismatches reported by OBSM, save merged image with new ID . | | | |
| | | Conduct off-line analysis of the reported mismatches. | | | |
| End of Sequence | | | | | |
| OFCP424J TC Seq. Name : OFCP424J () PACS SPU SWL PRAM dump monitoring in Retrieval mode TimeTag Type: Sub Schedule ID: <input type="checkbox"/> | | | | | |
| 9 | | MCS OBSM preparation for Image monitor in RETRIEVAL mode | | Next Step: 10 | |
| | | Note: It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client. Starting the OBSM application is not covered by the current procedure. | | | |
| 9.1 | | Select 'Image MONITOR' from the menu | | | |
| | | Select the Image menu of the OBSM Desktop . From the Image menu, select Monitor . The 'Image Catalog' window opens. | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|--|--------|-------------------|-------------|
| 9.2 | | Select image to be monitored | | | |
| 9.2.1 | | IF PACS Nominal | | | |
| | | Select the image to be monitored for the memory device PASPRMSW. The 'Image MONITOR' window opens. | | | |
| 9.2.2 | | ELSE PACS Redundant | | | |
| | | Select the image to be monitored for the memory device PASRMSWR. The 'Image MONITOR' window opens. | | | |
| 9.3 | | Start dump TM packets processing | | | |
| | | Set retrieval start time and start retrieval of TM packets using the PLAY buttons. | | | |
| 10 | | Retrieve and process TM(6,6) packets | | Next Step: 11 | |
| | | Use the STEP button to retrieve and process the TM(6,6) packets, packet by packet and starting from the time shown in the packet time field. | | | |
| | | OR | | | |
| | | Use the PLAY button to retrieve and process the TM(6,6) packets in automated mode. Pressing the PLAY button, the display will start to retrieve and process packets, starting from the time shown in the packet time field. This processing will stop automatically when a packet is received which creation time is greater than the one contained in the end time field. | | | |
| 11 | | Check contents of memory dump packets | | Next Step: END | |
| | | Verify that there are NO OBSM reported differences between the memory dump data and the ground image used for monitoring. | | | |
| | | IF there are differences reported by OBSM between the dump data and the ground image, the merged image shall be saved for offline analysis. | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|--|------|--|--------|----------------------------------|-------------|
| 11.1 | | Save merged image | | | |
| | | IF there are mismatches reported by OBSM, save merged image with new ID. | | | |
| | | Conduct off-line analysis of the reported mismatches. | | | |
| End of Sequence | | | | | |
| TC Seq. Name : OFCP424K () PACS SPU LWL PRAM dump monitoring in LIVE mode TimeTag Type: B Sub Schedule ID: <input type="checkbox"/> | | | | | |
| 12 | | IF Image Monitor In LIVE mode type: [If] | | Next Step: THEN 13 ELSE 18 | |
| 13 | | Manual Stack manipulation Load command stack file for PACS SPU LWL PRAM dump on Manual Stack | | Next Step: 14 | |
| | | NOTE: The current procedure assumes that the memory dump in Live mode is performed using commands with immediate execution. | | | |
| | | Select the File -> LoadStack option from the main menu of the Manual Stack window | | | |
| 13.1 | | IF PACS Nominal | | | |
| | | Select file PASPRMLW_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmmss.machine from directory /home/pmsops/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PASPRMLW as indicated by the OBSM engineer | | | |
| | | IMPORTANT: XXXXYYY = Image ID(X) and Version(Y) - depend on image used for stack generation YYYY_DDD hhmmss - depend on stack generation time machine - depends on the name of the machine used for stack generation | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp




| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|---|--------|-----------------|-------------|
| | | File name examples - No model associated to the memory image: PASRMLW_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PASRMLW1, ID 0003, Version 001 associated to the memory image: PASRMLW_DI_0002001_C_PASRMLW1_0003001_2007_337T093320.sun043 | | | |
| 13.2 | | ELSE PACS Redundant | | | |
| | | Select file PASRMLW_DI_XXXXYYY_N_NoModel_NoModel_YYYY_DDDThhmmss.machine from directory /home/pmcops/HPMCS/SESSION/current/data/CMD/STACKS/OBSM/PASRMLWR as indicated by the OBSM engineer | | | |
| | | IMPORTANT: XXXXYYY = Image ID(X) and Version(Y) - depend on image used for stack generation YYYY_DDD hhmmss - depend on stack generation time machine - depends on the name of the machine used for stack generation | | | |
| | | File name examples - No model associated to the memory image: PASRMLW_DI_0002001_N_NoModel_NoModel_2007_254T123300.sun043 - CT PASRMLW1, ID 0003, Version 001 associated to the memory image: PASRMLW_DI_0002001_C_PASRMLW1_0003001_2007_337T093320.sun043 | | | |
| 13.3 | | Check command stack loaded | | | |
| | | Check that loaded stack contains one or several TCs PC028380 | | | |
| | | Display the Manual Stack in 'Full mode' and check that the Memory ID parameter in the PC028380 command(s) is set to 61 hex : Memory ID = 61 hex Note: The Memory ID of the target memory device is stored in the MSB of the 16-bit long Mem ID TC parameter. The LSB of the same parameter carries the most significant 8 bits of the Start Address. | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|--|--------|------------------|-------------|
| | | Execute Telecommand <p style="text-align: right;">DPU_MEMORY_DUMP</p> <p style="text-align: right;">PC028380</p> <p>Command Parameter(s) :</p> <p style="margin-left: 40px;">DPU_MEMORY_BLOCK_ID PP009380 61xx</p> <p style="margin-left: 40px;">DPU_MEMORY_ADDR PP003380 <hex> (Def)</p> <p style="margin-left: 40px;">DPU_DATA_LENGTH PP008380 <dec> (Def)</p> <p>TC Control Flags :</p> <p style="margin-left: 40px;">GBM IL DSE</p> <p style="margin-left: 40px;">--Y -- ---</p> <p>Subsch. ID : 90</p> <p>Det. descr. : DUMP OF A DPU MEMORY AREA</p> <p>This Telecommand will not be included in the export</p> | | TC | |
| 14 | | MCS OBSM preparation for Image monitor in LIVE mode | | Next Step: 15 | |
| | | Note: It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client. Starting the OBSM application is not covered by the current procedure. | | | |
| 14.1 | | Select 'Image MONITOR' from the menu | | | |
| | | Select the Image menu of the OBSM Desktop . From the Image menu, select Monitor . The 'Image Catalog' window opens. | | | |
| 14.2 | | Select image to be monitored | | | |
| 14.2.1 | | IF PACS Nominal | | | |
| | | Select the image to be monitored for the memory device PASPRMLW . The 'Image MONITOR' window opens. | | | |
| 14.2.2 | | ELSE PACS Redundant | | | |
| | | Select the image to be monitored for the memory device PASRMLWR . The 'Image MONITOR' window opens. | | | |

| | |
|---|--|
| Monitor dump of PACS SPU PRAM memory area File: H_FCP_OBS_4242.xls Author: lstefanov-hp |  |
|---|--|

| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|----------|------|---|--------|-------------------|-------------|
| 14.3 | | Start dump TM processing | | | |
| | | In LIVE mode, processing of incoming real-time telemetry starts automatically after the image selection. | | | |
| 15 | | Upload command(s) to dump the PACS SPU LWL PRAM | | Next Step: 16 | |
| | | Uplink the PC028380 memory dump command(s) with ARM-GO | | | |
| | | For each command, one or more TM(6,6) packets must be received on ground. | | | |
| 16 | | Verify reception of TM(6,6) | | Next Step: 17 | |
| | | Note: One or more TM(6,6) packets will be received for each memory dump command uplinked. | | | |
| 16.1 | | IF PACS Prime | | | |
| | | Verify Packet Reception MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1152 Type : 6 Subtype : 6 PI1 : PI2 : | | | |
| 16.2 | | ELSE PACS Redundant | | | |
| | | Verify Packet Reception MEMORY_DUMP Packet Mnemonic : MEMORY_DUMP APID : 1153 Type : 6 Subtype : 6 PI1 : PI2 : | | | |
| 17 | | Check contents of memory dump packets | | Next Step: END | |
| | | Verify that there are NO OBSM reported differences between the memory dump data and the ground image used for monitoring. | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp




| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|---|------|---|--------|------------------|-------------|
| | | IF there are differences reported by OBSM between the dump data and the ground image, the merged image shall be saved for offline analysis. | | | |
| 17.1 | | Save merged image | | | |
| | | IF there are mismatches reported by OBSM, save merged image with new ID . | | | |
| | | Conduct off-line analysis of the reported mismatches. | | | |
| End of Sequence | | | | | |
| OFCP424L TC Seq. Name : OFCP424L () PACS SPU LWL PRAM dump monitoring in Retrieval mode TimeTag Type: Sub Schedule ID: <input type="checkbox"/> | | | | | |
| 18 | | MCS OBSM preparation for Image monitor in RETRIEVAL mode | | Next Step: 19 | |
| | | Note: It is assumed that the OBSM application is already running and the OBSM Desktop is displayed on the MCS client. Starting the OBSM application is not covered by the current procedure. | | | |
| 18.1 | | Select 'Image MONITOR' from the menu | | | |
| | | Select the Image menu of the OBSM Desktop . From the Image menu, select Monitor . The 'Image Catalog' window opens. | | | |
| 18.2 | | Select image to be monitored | | | |
| 18.2.1 | | IF PACS Nominal | | | |
| | | Select the image to be monitored for the memory device PASPRMLW . The 'Image MONITOR' window opens. | | | |

Monitor dump of PACS SPU PRAM memory area
 File: H_FCP_OBS_4242.xls
 Author: lstefanov-hp



| Step No. | Time | Activity/Remarks | TC/TLM | Display/ Branch | AIT Comment |
|-------------------------|------|--|--------|-------------------|-------------|
| 18.2.2 | | ELSE PACS Redundant | | | |
| | | Select the image to be monitored for the memory device PASRMLWR . The 'Image MONITOR' window opens. | | | |
| 18.3 | | Start dump TM packets processing | | | |
| | | Set retrieval start time and start retrieval of TM packets using the PLAY buttons. | | | |
| 19 | | Retrieve and process TM(6,6) packets | | Next Step: 20 | |
| | | Use the STEP button to retrieve and process the TM(6,6) packets, packet by packet and starting from the time shown in the packet time field. | | | |
| | | OR | | | |
| | | Use the PLAY button to retrieve and process the TM(6,6) packets in automated mode. Pressing the PLAY button, the display will start to retrieve and process packets, starting from the time shown in the packet time field. This processing will stop automatically when a packet is received which creation time is greater than the one contained in the end time field. | | | |
| 20 | | Check contents of memory dump packets | | Next Step: END | |
| | | Verify that there are NO OBSM reported differences between the memory dump data and the ground image used for monitoring. | | | |
| | | IF there are differences reported by OBSM between the dump data and the ground image, the merged image shall be saved for offline analysis. | | | |
| 20.1 | | Save merged image | | | |
| | | IF there are mismatches reported by OBSM, save merged image with new ID . | | | |
| | | Conduct off-line analysis of the reported mismatches. | | | |
| End of Sequence | | | | | |
| End of Procedure | | | | | |