




Spire Procedure	
SPIRE Warm Units EMC Conductive Emissions Procedures for IST Sunil D.Sidher	Ref: SPIRE-RAL-PRC-002946 Issue: 1.0 Date: 17 th July 2007 Page: 1 of 15

1. Introduction

This document describes the procedures to be used for the EMC Conductive Emissions (CE) Test with the SPIRE Warm Units. These procedures are valid only for the SPIRE Warm Units (**before integration of FM DRCU with the FPU**). The transition to and from the mode for the CE measurements is as follows:

- **OFF to STBY.** Note that the **STBY** mode is known as **REDY** mode in **SPIRE** terminology. In this mode only SPIRE HK is being generated.
- **STBY to “PHOTOPS”**, where “PHOTOPS” refers to a dummy mode where SPIRE is Prime Instrument and generating both Photometer science and HK data at the nominal data rate. **SPIRE should be in this mode for the duration of the EMC CE tests.**
- **“PHOTOPS” to STBY**
- **STBY to OFF**

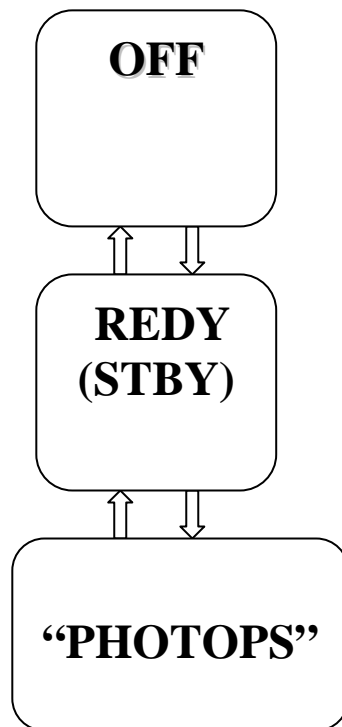

These procedures should only be used before integration with the FPU. Since these procedures use standalone TCL scripts they do not require initiation from the I-EGSE, although the I-EGSE will be used to monitor the progress of the tests and to archive test data.



Spire Procedure
SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 2 of 15

1.1 Scope

These procedures are intended for execution on the SPIRE Warm Units only, i.e. the FM DPU and DRCU. The FPU must not be connected in any way to the Warm Units.

1.2 Applicable Documents

AD#	Title	Reference	Issue#	Date
AD01	SPIRE Functional Test Specification	SPIRE-RAL-DOC-001652	1.4	22 nd July 2005

1.3 Reference Documents

RD#	Title	Reference	Issue#	Date
RD01	SPIRE Instrument User Manual	SPIRE-RAL-PRJ-002395	1.0	8 th April 2005

1.4 Change Record

Doc	Issue#	Changes	Date of Change
Issue	1.0	First version prepared for IST EMC CE Tests with Warm Units	17 th July 2007

1.5 Open Issues

1.6 Constraints

These procedures are only valid for the IST EMC CE test on the SPIRE Warm Units and should *not* be used after the FPU has been integrated with the FM DRCU.

1.7 List of Acronyms

AND	Alpha Numeric Display
AVM	Avionics Model
BSM	Beam Steering Mirror
CCS	Central Checkout System
CDMU	Command and Data Management Unit
CE	Conductive Emissions



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-
002946
Issue: 1.0
Date: 17th July 2007
Page: 3 of 15

DCU	Detector Control Unit
DPU	Digital Processing Unit
DRCU	Detector Readout and Control Unit
EGSE	Electrical Ground Support Equipment
EMC	Electromagnetic Compatibility
FM	Flight Model
FPU	Focal Plane Unit
I-EGSE	Instrument EGSE
IST	Integrated Systems Test
MCU	Mechanism Control Unit
SMEC	Spectrometer Mechanism
WU	Warm Units



Spire Procedure
SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 4 of 15

Table of contents

- 1. Introduction 1
 - 1.1 Scope..... 2
 - 1.2 Applicable Documents 2
 - 1.3 Reference Documents 2
 - 1.4 Change Record..... 2
 - 1.5 Open Issues 2
 - 1.6 Constraints 2
 - 1.7 List of Acronyms 2
- 2. Test Configuration..... 5
 - 2.1 FM Test Configuration 5
- 3. IST WU EMC CE Procedures Overview 6
 - 3.1 General instructions for executing the test procedures 6
 - 3.2 Test Sequences 6
 - 3.2.1 WU EMC CE Test Sequence..... 6
- 4. Detailed IST WU EMC CE Procedures..... 7
 - 4.1 Procedures..... 7
 - 4.1.1 Procedure SPIRE-IST-WU-EMC-CE-OFF-TO-STBY 7
 - 4.1.2 Procedure SPIRE-IST-WU-EMC-CE-STBY-TO-PHOTOPS 10
 - 4.1.3 Procedure SPIRE-IST-WU-EMC-CE-PHOTOPS-TO-STBY 12
 - 4.1.4 Procedure SPIRE-IST-WU-EMC-CE-STBY-TO-OFF 14



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-
002946
Issue: 1.0
Date: 17th July 2007
Page: 5 of 15

2. Test Configuration

The main differences between the AVM and the FM configurations are with respect to the hardware. On the SPIRE AVM hardware the Warm Units and the FPU are substituted by a DRCU simulator.

2.1 FM Test Configuration

This is the required configuration prior to the start of the test:

SPIRE WU:

- The SPIRE FM DRCU should be interconnected with the SPIRE FM DPU, both PRIME and REDUNDANT interfaces.
- The SPIRE FM DRCU NOMINAL and REDUNDANT power interfaces to the Herschel satellite should be connected.
- The SPIRE FM DPU NOMINAL and REDUNDANT 1553 interfaces to the Herschel satellite should be connected.
- The SPIRE FM DPU NOMINAL and REDUNDANT power interfaces to the Herschel satellite should be connected.

HCDMU:

- The Bus list selected on the HCDMU should be as appropriate for the planned activity. If SPIRE is to put into an "Operations" mode then bus list should be for SPIRE Prime Instrument, (i.e., 27 TM slots allocated for SPIRE telemetry). For the NOMINAL side tests the BUS Configuration should be SPIRE Nominal (i.e, RT=21) and for the REDUNDANT side test the BUS Configuration should be SPIRE Redundant (i.e, RT=22).
- The HCDMU and CCS should be interconnected.

CCS:

- The SPIRE MIB should be imported on the CCS.



Spire Procedure	Ref: SPIRE-RAL-PRC-002946
SPIRE Warm Units EMC Conductive Emissions Procedures for IST	Issue: 1.0
Sunil D.Sidher	Date: 17 th July 2007
	Page: 6 of 15

3. IST WU EMC CE Procedures Overview

3.1 General instructions for executing the test procedures

- Section 3.2 of this document specifies the sequence to be executed. Each of the steps in the sequence has a detailed specification in section 4.
- The detailed procedures in section 4 include blank boxes where the actual values of parameters can be noted. Based on the comparison with the expected values the success or failure of a step should be recorded in the final column of the table.
- The last row in a procedure table should be used to record the overall Pass/Fail result of each test.
- In general any text in boldface in the procedural steps indicates an action which may have to be performed manually by the CCS staff.

3.2 Test Sequences

3.2.1 WU EMC CE Test Sequence

This section specifies the sequence to be executed for switching between OFF and PHOTOPS modes. Maximum estimated times for executing a test sequence are also given.

Procedure Name	Purpose	Duration
<u>SPIRE-IST-WU-EMC-CE-OFF-TO-STBY</u>	To switch SPIRE from OFF to STBY mode	~5 min
<u>SPIRE-IST-WU-EMC-CE-STBY-TO-PHOTOPS</u>	To switch SPIRE from STBY to “PHOTOPS” mode	~5 min
<u>SPIRE-IST-WU-EMC-CE-PHOTOPS-TO-STBY</u>	To switch SPIRE from “PHOTOPS” to STBY mode	~5 min
<u>SPIRE-IST-WU-EMC-CE-STBY-TO-2OFF</u>	To switch SPIRE from STBY to OFF	~5 min

Total: ~ 20 min



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 7 of 15

4. Detailed IST WU EMC CE Procedures

4.1 Procedures

4.1.1 Procedure SPIRE-IST-WU-EMC-CE-OFF-TO-STBY

Version	1.0
Date	17 th July 2007
Purpose	To switch the SPIRE instrument from OFF to STBY mode
Initial configuration	SPIRE DPU and DRCU are switched off
Final configuration	SPIRE is in STBY mode: <ul style="list-style-type: none"> • SPIRE DPU and DRCU are on • Generating Nominal HK reports at 4 second intervals • Generating Critical HK reports at 2 second intervals
Preconditions	<ul style="list-style-type: none"> • SPIRE FM DPU and DRCU are electrically integrated with the Herschel Satellite • SPIRE MIB is imported in the CCS database. • CCS is up and running • DPU AND OBS PARAMETERS AND is selected on the CCS • SFT PARAMETERS AND is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Nominal and Critical HK reports start being generated at their nominal rates of 0.25Hz and 0.5Hz respectively.



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 8 of 15

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Pass/Fail
1	Power ON the SPIRE DPU NOMINAL unit using the dedicated spacecraft LCL line and configure 1553 Spacecraft bus for SPIRE DPU (RT = 21)	—	—	—	
2	Wait for the boot software to produce at least 2 event packets (5,1)	—	—	—	
3	Execute TCL script SPIRE-IST-DBG-OFF2DPUON.tcl – Issue 1.1	—	—	—	
4	Nominal and Critical HK packets should arrive at the CCS for 10 seconds: SPIRE Nominal HK: <ul style="list-style-type: none"> • (type ,subtype) : (3,25) • APID : 0x502 SPIRE Critical HK: <ul style="list-style-type: none"> • (type ,subtype) : (3,25) • APID: 0x500 	—	—	—	
5	For this 10 second period check that TM1N and TM2N parameters incremented as indicated	TM1N TM2N	@ 0.5Hz @ 1Hz	—	
6	After this 10 second interval check that all HK TM reception has stopped	TM1N TM2N	Not incrementing Not incrementing	— —	
7	Power ON the SPIRE DRCU NOMINAL unit using the dedicated spacecraft LCL line.	—	—	—	
8	Execute TCL script SPIRE-IST-DBG-DPUON2STBY.tcl – Issue 1.2	—	—	—	
9	Check that the THSK parameter is refreshing every 4 seconds	THSK	Refreshing @ 0.25Hz	—	



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 9 of 15

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Pass/Fail
10	Check that TM1N and TM2N parameters are incrementing as indicated	TM1N	Incrementing by 2 every 4 seconds	—	
		TM2N	Incrementing by one every 4 seconds	—	
11	Check that the DRCU parameters show nominal values.	SCUP5V	~ 5.2 ± 0.5V		
		SCUP9V	~ 9.0 ± 0.2V		
		SCUM9V	~ -9.0 ± 0.2V		
		BIASP5V	~ 5.1 ± 0.5V		
		BIASP9V	~ 9.0 ± 0.2V		
		BIASM9V	~ -9.0 ± 0.2V		
		MCUBITSTAT	0/1		
		MCUP5V	~ 5.0 ± 0.3V		
		MCUP14V	~ 14.0 ± 0.6V		
		MCUM14V	~ -14.0 ± 0.6V		
		MCUP15V	~ 15.0 ± 0.6V		
		MCUM15V	~ -15.0 ± 0.6V		
12	Check that SPIRE is in REDY mode	MODE	DRCU_ON/REDY		
Test Result (Pass/Fail):					



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 10 of 15

4.1.2 Procedure SPIRE-IST-WU-EMC-CE-STBY-TO-PHOTOPS

Version	1.0
Date	17 th July 2007
Purpose	To switch SPIRE from STBY to “PHOTOPS” mode
Initial configuration	<ul style="list-style-type: none"> • SPIRE DPU and DRCU are ON • SPIRE is in REDY mode
Final configuration	SPIRE is Prime Instrument and in “PHOTOPS” mode: <ul style="list-style-type: none"> • Generating critical and nominal HK at 0.5Hz and 1Hz respectively • Generating photometer test pattern data at ~ 18 packets/s • Generating MCU test pattern data at 2 packets/s
Preconditions	<ul style="list-style-type: none"> • SPIRE MIB is imported in the CCS database. • CCS is up and running • DPU AND OBS PARAMETERS and FUNCTIONAL TEST PARAMETERS ANDs are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	SPIRE is Prime Instrument and in “PHOTOPS” mode: <ul style="list-style-type: none"> • Generating critical and nominal HK at 0.5Hz and 1Hz respectively • Generating Photometer and MCU test pattern data at ~ 18 packets/s and 2 packets/s respectively



Spire Procedure
 SPIRE Warm Units EMC Conductive
 Emissions Procedures for IST
 Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 11 of 15

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-IST-WU-EMC-CE-STBY2PHOTOPS.tcl – Issue 1.0	—	—	—	
2	Check that THSK parameter is refreshing every second	THSK	Refreshing @ 1Hz	—	
3	Check that TM1N and TM2N parameters are incrementing as indicated	TM1N TM2N	@ 0.5Hz @ 1Hz	—	
4	Check that TM3N is incrementing as indicated	TM3N	~18-20 Hz	—	
5	Check that TM5N is incrementing as indicated	TM5N	Incrementing by ~4-5 every 2 seconds	—	
6	Check that DCUFRAMECNT and MCUFRAMECNT on the FUNCTIONAL TEST PARAMETERS AND are incrementing as indicated	DCUFRAMECNT MCUFRAMECNT	~18-20 Hz Incrementing by ~96-100 every 2 seconds	— —	
7	Check that the MODE parameter is set to RAW value 0xFFCE for the “PHOTOPS” mode <i>Note that “PHOTOPS” is a dummy value for the EMC CE activities – no converted value is defined.</i>	MODE	REDY (0x200) / 0xFFCE		

Test Result (Pass/Fail):



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-
002946
Issue: 1.0
Date: 17th July 2007
Page: 12 of 15

4.1.3 Procedure SPIRE-IST-WU-EMC-CE-PHOTOPS-TO-STBY

Version	1.0
Date	17 th July 2007
Purpose	To switch SPIRE from “PHOTOPS” to STBY mode
Initial configuration	<ul style="list-style-type: none">• SPIRE DPU and DRCU are ON• SPIRE is Prime Instrument• SPIRE is in “PHOTOPS” mode and generating photometer and MCU test pattern data, as well as HK
Final configuration	SPIRE is in STBY mode: <ul style="list-style-type: none">• Generating only critical and nominal HK at 0.5Hz and 0.25Hz respectively
Preconditions	<ul style="list-style-type: none">• SPIRE MIB is imported in the CCS database.• CCS is up and running• DPU AND OBS PARAMETERS and FUNCTIONAL TEST PARAMETERS ANDs are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	SPIRE is in STBY mode



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 13 of 15

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-IST-WU-EMC-CE-PHOTOS2STBY.tcl – Issue 1.0	—	—	—	
2	Check that the THSK parameter is refreshing every 4 seconds	THSK	Refreshing @ 0.25Hz	—	
3	Check that TM1N and TM2N parameters are incrementing as indicated	TM1N	Incrementing by 2 every 4 seconds	—	
		TM2N	Incrementing by one every 4 seconds		
4	Check that TM3N and TM5N have stopped incrementing	TM3N	—	—	
		TM5N	—	—	
5	Check that DCUFRAMECNT and MCUFRAMECNT on the FUNCTIONAL TEST PARAMETERS AND have stopped incrementing	DCUFRAMECNT	—	—	
		MCUFRAMECNT	—	—	
6	Check that SPIRE is in REDY mode (RAW 0x200)	MODE	0xFFCE/0x200 (REDY)		

Test Result (Pass/Fail):



Spire Procedure

SPIRE Warm Units EMC Conductive
Emissions Procedures for IST
Sunil D.Sidher

Ref: SPIRE-RAL-PRC-
002946
Issue: 1.0
Date: 17th July 2007
Page: 14 of 15

4.1.4 Procedure SPIRE-IST-WU-EMC-CE-STBY-TO-OFF

Version	1.0
Date	17 th July 2007
Purpose	To switch SPIRE from STBY mode to OFF
Initial configuration	<ul style="list-style-type: none">• SPIRE DPU and DRCU are ON• SPIRE is in STBY mode: Generating only critical and nominal HK at 0.5Hz and 0.25Hz respectively
Final configuration	SPIRE is OFF: <ul style="list-style-type: none">• DPU and DRCU are both OFF
Preconditions	<ul style="list-style-type: none">• SPIRE MIB is imported in the CCS database.• CCS is up and running• DPU AND OBS PARAMETERS is selected on the CCS• SFT PARAMETERS AND is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	SPIRE instrument is OFF



Spire Procedure
 SPIRE Warm Units EMC Conductive
 Emissions Procedures for IST
 Sunil D.Sidher

Ref: SPIRE-RAL-PRC-002946
Issue: 1.0
Date: 17th July 2007
Page: 15 of 15

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-IST-DBG-STBY2OFF.tcl – Issue 1.2	—	—	—	
2	Check that TM1N and TM2N parameters have both stopped incrementing	TM1N TM2N	— —	— —	
3	Check that the MCU has been switched off	MCUBITSTAT	1/0		
4	Check that SPIRE is in DRCU_ON mode	MODE	DRCU_ON		
5	Power OFF the SPIRE DRCU NOMINAL unit.	—	—	—	
6	Power OFF the SPIRE DPU NOMINAL unit.	—	—	—	

Test Result (Pass/Fail):

NOTE: IF THE DPU IS TO BE POWERED ON AGAIN, PLEASE WAIT ~2 MINUTES AFTER EXECUTION OF SPIRE-IST-WU-EMC-CE-STBY2OFF.