



Test Report

Herschel

Title: Test Report for SPIRE SFT
In TV Hot (Phase 14)

CI-No: 125 200

Prepared by:	A. Koppe <i>A. Koppe</i>	Date:	15.01.2009
Checked by:	S. Hamer <i>S. Hamer</i>		15.01.2009
Checked by:	J. Kroeker <i>J. Kroeker</i>		15.1.2009
Product Assurance:	R. Stritter <i>R. Stritter</i>		15.1.2009
Configuration Control:	W. Wietbrock <i>W. Wietbrock</i>		16.01.2009
Project Management:	W. Fricke <i>W. Fricke</i>		16/01/2009

Distribution: See Distribution List (last page)

Copying of this document, and giving it to others and the use or communication of the contents thereof, is forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Issue	Date	Sheet	Description of Change	Release
1	15.01.09	All	Formal Issue	

Table of Content

1	Scope	5
1.1	Objective 5	
1.2	Test Flow	5
1.3	Procedure Execution Summary:	8
2	Documents/Drawings	13
2.1	Applicable Documents	13
2.2	Reference Documents	13
2.3	Other Documents	13
2.4	Acronyms & Abbreviations	13
3	Main Observations and Problems Identified.	14
3.1	SPIRE (NCR-4743)	14
3.2	SPIRE (NCR-4744)	14
3.3	SPIRE (NCR-4745)	14
3.4	Procedure Changes	14
4	Summary	15
4.1	Open Issues	15
4.2	Requirements Verified	15
5	Appendix 1: SPIRE FM Short Functional Test	16
6	Appendix 2: Temperatures during SFT in TV Hot (Phase 14)	17

List of Tables

Table 1: SPIRE SFT Test Summary.....12

1 Scope

This document reports on the SPIRE SFT at He2 conditions, performed in the frame of the HERSCHEL TB/TV Test Phase 14 (see test step TS#14t and #14u of AD 3) in TV Hot, to verify proper instrument operation.

The test was executed with the S/C in vertical position using the Herschel CCS & I-EGSE.

1.1 Objective

The objective of this SFT was:

- To check the correct functional operation of the SPIRE FM under He2 conditions on nominal and redundant side under TV Hot conditions (TV Phase 14)

Note: The SPIRE detector checks, Mechanism and LPU tests were not part of this SFT.

1.2 Test Flow

The TB/TV test is guided by the "Integrated Test Procedure for the HERSCHEL FM TB/TV Test", ref. HP-2-ASED-TP-0177, Issue 1.1 [AD3]. The instrument relevant parts are called up by procedure "HERSCHEL SAT and Instruments Procedure for the SAT TB/TV Testing", ref. HP-2-ASED-TP-0236, Issue 1.0 [AD4], which then addresses the applicable instrument SFT procedure "TBTV SPIRE Functional Test Procedure", ref. HP-2-ASED-TP-0212, Issue 2, [AD1] for SPIRE. Since the nominal SPIRE instrument was powered on from the preceding Phase, the instrument needed to be switched off and redundant side powered on according to AD2 to perform the SFT.

After completion of the SFT, but within TV Test Phase 14, additional investigations on the SPIRE SCAL script execution anomaly (NCR-4457), which could be successfully completed with PVS # 307- 308, and JFET switch on anomaly (NCR-4705) have been performed.

Thereafter, the instrument was left in REDY mode on nominal side for the remaining TV testing (see steps below).

The Test flow in Phase 14 of the TV Cold phase was as follows:

1. Power off SPIRE Nominal from REDY mode as per AD 2, chapter 7.28
2. configure SPIRE I-EGSE for test
3. Power on SPIRE Redundant for SFT as per AD 1, chapter 7.2.6
4. Run Redundant SFT Procedures as per table 1.2-2
5. Power off SPIRE Redundant as per AD 1, chapter 7.2.8

6. Power on SPIRE Nominal as per AD 1, chapter 7.2.2
7. Run Nominal SFT Procedures as per table 1.2-1
8. SPIRE Nominal left in TV REDY mode
9. Power off SPIRE Nominal as per AD 1, chapter 7.2.4
10. Power on SPIRE Nominal as per AD 1, chapter 7.2.2

Step #	Procedure Name	Purpose
1.	SPIRE-FM-SFT-FUNC-SCU-01-P	SCU Nominal Science Packet Generation Check PRIME
2.	SPIRE-FM-SFT-FUNC-SCU-03-P	SCU DC Thermometry check PRIME
3.	SPIRE-FM-SFT-FUNC-SCU-06-P	SCU AC Thermometry check PRIME
4.	SPIRE-FM-SFT-FUNC-SCU-07-P	Sorption Cooler Heaters Check PRIME
5.	SPIRE-FM-SFT-FUNC-SCU-04-P	Photometer Calibrator Check PRIME
6.	SPIRE-FM-SFT-FUNC-SCU-05-P	Spectrometer Calibrator Check PRIME
7.	SPIRE-FM-SFT-FUNC-MCU-01-P	MCU Boot Check PRIME
8.	SPIRE-FM-SFT-FUNC-MCU-02-P	MCU Nominal Science Packet Generation Check PRIME
9.	SPIRE-FM-SFT-FUNC-BSM-01-P	BSM Chop/Jiggle Sensors check PRIME
10.	SPIRE-FM-SFT-BSM-OFF-P	BSM switch OFF PRIME
11.	SPIRE-FM-SFT-FUNC-SMEC-01-P	SMEC Encoder and LVDT check PRIME
12.	SPIRE-FM-SFT-SMEC-OFF-P	SMEC switch OFF
13.	SPIRE-FM-FUNC-DCU-01-P	DCU Science Packet Generation Check PRIME
14.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P	Photometer LIAs Check PRIME
15.	SPIRE-FM-SFT-PLIA-OFF-P	Photometer LIAs Switch OFF PRIME
16.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P	Spectrometer LIAs Check PRIME
17.	SPIRE-FM-SFT-SLIA-OFF-P	Spectrometer LIAs Switch OFF PRIME
18.	SPIRE-FM-SFT-FUNC-MCU-OFF-P	MCU switch OFF PRIME
19.	SPIRE-FM-SFT-FUNC-SCU-OFF-P	SCU Switch OFF PRIME
20.	SPIRE-FM-SFT-LPU-01-P	Checkout of LPU PRIME not performed

Table 1.2-1 SPIRE Prime Functional Procedures

Step #	Procedure Name	Purpose
1.	SPIRE-FM-SFT-FUNC-SCU-01-R	SCU Nominal Science Packet Generation Check REDUNDANT
2.	SPIRE-FM-SFT-FUNC-SCU-03-R	SCU DC Thermometry Check REDUNDANT
3.	SPIRE-FM-SFT-FUNC-SCU-06-R	SCU AC Thermometry Check REDUNDANT
4.	SPIRE-FM-SFT-FUNC-SCU-07-R	Sorption Cooler Heaters Check REDUNDANT
5.	SPIRE-FM-SFT-FUNC-SCU-04-R	Photometer Calibrator Check REDUNDANT
6.	SPIRE-FM-SFT-FUNC-SCU-05-R	Spectrometer Calibrator Check REDUNDANT
7.	SPIRE-FM-SFT-FUNC-MCU-01-R	MCU Boot Check REDUNDANT
8.	SPIRE-FM-SFT-FUNC-MCU-02-R	MCU Nominal Science Packet Generation Check REDUNDANT
9.	SPIRE-FM-SFT-FUNC-BSM-01-R	BSM Chop/Jiggle Sensors check REDUNDANT
10.	SPIRE-FM-SFT-BSM-OFF-R	BSM Switch OFF REDUNDANT
11.	SPIRE-FM-SFT-FUNC-SMEC-01-R	SMEC Encoder and LVDT check REDUNDANT
12.	SPIRE-FM-SFT-SMEC-OFF-R	SMEC Switch OFF
13.	SPIRE-FM-FUNC-DCU-01-R	DCU Science Packet Generation Check REDUNDANT
14.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R	Photometer LIAs Check REDUNDANT
15.	SPIRE-FM-SFT-PLIA-OFF-R	Photometer LIAs Switch OFF REDUNDANT
16.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R	Spectrometer LIAs Check REDUNDANT
17.	SPIRE-FM-SFT-SLIA-OFF-R	Spectrometer LIAs Switch OFF REDUNDANT
18.	SPIRE-FM-SFT-FUNC-MCU-OFF-R	MCU Switch OFF REDUNDANT
19.	SPIRE-FM-SFT-FUNC-SCU-OFF-R	SCU Switch OFF REDUNDANT
20.	SPIRE-FM-SFT-LPU-01-R	Checkout of LPU REDUNDANT not performed

Table 1.2-2: SPIRE Redundant Functional Procedures

1.3 Procedure Execution Summary:

This test has been run with the HERSCHEL S/C in vertical position inside TV chamber and on SPIRE redundant and nominal side. The as run procedure is attached to this document (ANNEX 1).

The test duration of the SPIRE SFT Test was ~ 4 hours.

Location: ESTEC, Noordwijk, NL

TV Chamber

Test Session Name:

2008_12_10_23_01_her VTP14a cdmu_hpws23_REALTIME_TBT

Environment: HP_2_ASED _TP_236_TBTV_END_002

OBSW: CDMS 3.6.2.6, ACMS 4.0

HPsDB: HP-ASP-LI-1441_26

HPCCS Release: HPCCS Release_2.0-1317

Procedure variations of the SFT as recorded in the Procedure Variation Summary in § 8.1 for the corresponding “as-run” procedure are:

PVS#C273 Reconfigure SPIRE for SFT tests

PVS#C283 HIFI Panels Temperature Adjustment

All non-compliances are recorded in the Observation/NCR Summary below as applicable and detailed further in Section 3.

The following observations were made during the test:

Time (UTC)	Test Procedure / Step / Script / Command / Event / Anomaly	Remarks / Cause of anomaly / Corrective action	C/A type (T/P)	NCR ref. (P)
Thursday, December, 11th				
04:44	Reconfigure SPIRE for SFT tests, switch off SPIRE Nominal and then switch on Redundant SPIRE			PVS#C273 TP-0236
04:45	CCS Alarm IFMGRmanager ACK timeout occurred, dropping connection to SCOE HSPIREEGSE			Re-occurrence NCR 4709 PVS#C282 TP-0248
05:19	Spire connection re-established continue with SPIRE switch OFF			
05:26	SPIRE nominal OFF			
05:37	SPIRE redundant ON (DRCU_ON)			
05:38	Start SPIRE SFT redundant			
05:46	SCAL2TEMP and SCAL4TEMP and SMECTEMP is out of calibration range	Whilst performing SPIRE SFT Redundant tests, HP-2-ASED-TP-0212, chapter 7.2.7.2		NCR 4744 TP-0212
Handover to Early Shift team				
05:50	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re-occurrence
05:58	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re-occurrence
06:03	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re-occurrence
06:20	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re-occurrence
06:20	HIFI Panels Temperature Adjustment			PVS#C283
06:00	Cooling Cart de-iced			
06:24	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re-occurrence

Time (UTC)	Test Procedure / Step / Script / Command / Event / Anomaly	Remarks / Cause of anomaly / Corrective action	C/A type (T/P)	NCR ref. (P)
06:26	Spire 5-4 event received	This is expected, included in the procedure		
06:30	SPIRE Redundant SFT completed (TP-0212, Section 7.2.7.)	LSS informed		
06:33	Rx1 temperature (RMB02442)OOL (51°C)	Alarm raised if temp exceeds 50°C, but this limit refers to baseplate, not equipment temperatures. NCR 4743 applies.		NCR 4743 Re- occurrence
06:37	(TP-0212, Section 7.2.7.) Switch OFF SPIRE Redundant	Switched OFF at 06:37 (LSS informed)		
06:48	(TP-0212, Section 7.2.2.) Switch ON SPIRE Primary	LSS informed		
06:50	(TP-0212, Section 7.2.3.) SPIRE Primary Short Functional Tests			
07:19	Problem in SPIRE-FM-SFT-FUNC-DCU-01-P, DCUFRAMECNT is 693 instead of 700.			NCR 4745 TP-0212
07:48	Completion of: (TP-0212, Section 7.2.3.) SPIRE Primary Short Functional Tests	IEGSE & LSS informed		
08:05	(TP-0212, Section 7.2.4.) SPIRE Primary Switched OFF	LSS informed		
08:07	(TP-0248, Section 7.2.) Switch ON SPIRE Primary			
08:13	Close DPS Valve V103 (Existing status = open)	Closed at 08:13		PVS#C284
08:14	Close DPS Valve V106 (Existing status = open)	Closed at 08:14		TP-0212
08:15	Ready to start first tilting (to vertical), Disable GYRO FDIR			
	DPS Valve operation			
08:26	(TP-0248, Section 7.2.) SPIRE Primary Switched ON			
	Error in SPIRE SPT Power ON Script (nominal & redundant)			SPR#1077
08:42	Completion of first tilting (to vertical)			
Note: HIFI SFT log deleted				
	Preparations for SPIRE test	Change SCBP to 3, set allsubcribeparameters to SPIRE etc Connection test ok Test-floor informed for start of test		PVS#C273
17:49	Started SPIRE-IST-SCAL2_WARMUP	SPIRE reports that test failed; No increase in current observed; SMS0V520 (SCAL2V) value=3.6e-5 SMS0A520 (SCAL2CURR)		

Time (UTC)	Test Procedure / Step / Script / Command / Event / Anomaly	Remarks / Cause of anomaly / Corrective action	C/A type (T/P)	NCR ref. (P)
		value=0.00061 Next steps 3 and 4 skipped (step 2 is just a wait)		
18:05	Started SPIRE-IST-SCAL4-WARMUP	Noticed this time directly that again no current increase is seen: SMS1V520 (SCAL4V) value=6.8e-5 SMS1A520 (SCAL4CURR) value=-8.7e-5		
18:06	Interrupted test for discussion on how to proceed			
18:25	Performed PVS#C292 to support failure investigation for SPIRE	Call for two table reports and check on received TM(21,4) packets		
18:31	Continued with SPIRE test. Request from SPIRE: Check on L3 temp before start of test Value read by CCS: ~ 6 K Ok, go ahead from SPIRE for test			
18:32	Started SPIRE-IST-SPT-BSM-ON	Completed Ok		
18:33	Started SPIRE-IST-SPT-BSM-INIT	Completed Ok		
18:35	Started SPIRE-IST-START-TEST	Completed Ok		
18:41	Started SPIRE-IST-SPEC-JFET	Test-floor informed; Investigation completed. Partial success		
19:00	Update on Telescope decontamination progress: Telescope is still cold due to difficulties with parameter calibration curve Test on hold	NCR-4357 not (yet) implemented ??!!! Status acc. PRISMA is all actions still open		
19:22	Started SPIRE-IST-END-TEST	Completed Ok		PVS#C273
19:27	Started SPIRE-IST-SPT-SDET-OFF			cont'd
19:29	Started SPIRE-IST-SPT-BSM-OFF			
19:30	SPIRE in correct mode (REDY) for SOVT2; SPIRE test finished	Informed test-floor		
	Resumed Telescope Decontamination test			
19:56	Perform PVS#C293	This time with correct calibration values by PVSsince NCR-4357 seems not implemented Switched off heatergroup 10		PVS#C293
20:14	Perform PVS#C294	To avoid too big gradient between M1 and M2		PVS#C294
	And now we wait	Just monitor the heating up and if required perform PVS#C294 last part		
21:30	Handed-over shift to capable nite crew			
21:35	Perform PVS#C295	Prevent battery cycling during Telescope Decontamination		PVS#C295

Time (UTC)	Test Procedure / Step / Script / Command / Event / Anomaly	Remarks / Cause of anomaly / Corrective action	C/A type (T/P)	NCR ref. (P)
		(errr..... ever seen a battery go cycling ??.....)		
21:54 21:59 22:01	RMB03442 (TX2 temp) OOL			
	Monitoring Telescope Decontamination temperatures ongoing			
23:09	Start performing TT&C Health Checks TP-0177 TS#14w step 121 under the control of PVS#C295 via PVS#T14	Confused, well that makes 2 of us. Starting with LGA2 antenna		PVS#C296
	Test floor report that their workstation has locked up.	Work station hpws26 rebooted		

Table 1: SPIRE SFT TV Hot (Phase 14) Test Summary

2 Documents/Drawings

2.1 Applicable Documents

AD1	SPIRE FM Short Functional Test (Warm or Cold)	HP-2-ASED-TP-0212, Issue 2
AD2	TBTV SPIRE Functional Test Procedure	HP-2-ASED-TP-0248, Issue 2
AD3	Integrated Test Procedure for the HERSCHEL FM TB/TV Test	HP-2-ASED-TP-0177, Issue 1.1
AD4	HERSCHEL SAT and Instruments Procedure for the SAT TB/TV Testing	HP-2-ASED-TP-0236, Issue 1.0

2.2 Reference Documents

None

2.3 Other Documents

None

2.4 Acronyms & Abbreviations

See "as-run" procedure.

3 Main Observations and Problems Identified.

The following NCR's reoccurred during this run of the SPIRE SFT:

3.1 SPIRE (NCR-4743)

Whilst performing HP-2-ASED-TP-0236 / ITP TP-0177, TP-K-2 phase, step 3 during monitor of PLM external equilibrium continuity check for tilting.

It was noticed that the temperatures for Tx1 (55.9degC) and Rx1 (57.1degC) exceeded the upper limit of 50degC.

It is understood that the 50degC limit is based on the Baseplate temperature, but we do not have definitive upper temperature limits for these equipments, so there is no way we can determine if we are applying undue temperature stress to equipments.

New NCR's been raised during Phase 14 SFT:

3.2 SPIRE (NCR-4744)

Whilst performing SPIRE SFT Redundant tests, HP-2-ASED-TP-0212 iss 2.0, chapter 7.2.7.2
Observed on 11-12-2008 at 05:46 UTC
SCAL2TEMP and SCAL4TEMP and SMECTEMP is out of calibration range.

H-P-TAS-MN-11118 17.12.08

Test has been successful.

The SPIRE DPU memory (VM table for the SCAL) has to be patched each time SPIRE is switched ON (until the DPU software is updated).

?? Test & flight Switch on procedure to be updated by adding this patch at the end of the sequence, until software update. This should be added in the User manual until software update.

3.3 SPIRE (NCR-4745)

Whilst performing HP-2-ASED-TP-0212 iss 2.0, Section 7.2.3. SPIRE Primary Short Functional Tests, SPIRE-FM-

SFT-FUNC-DCU-01-P,

Observed on 11-12-2008 at 07:19 UTC

Problem in SPIRE-FM-SFT-FUNC-DCU-01-P, DCUFRAMECNT is 693 instead of 700.

Note: This occurred for SPIRE Nominal side only, problem was not seen for Redundant.

3.4 Procedure Changes

No updates or clarifications have been identified during the SFT procedure.

4 Summary

The SPIRE SFT in TV test Phase 14 (TV Hot) was successfully performed on both, nominal and redundant side.

After completion of the SFT, but within TV Test Phase 14, additional investigations on the SPIRE SCAL script execution anomaly (NCR-4457), which could be successfully completed with PVS # 307- 308, and JFET switch on anomaly (NCR-4705) have been performed.

Temperature profiles are attached in annex 2.

The detailed evaluation of the test results will be performed by RAL and issued in a separate instrument test report.

4.1 Open Issues

none

4.2 Requirements Verified

With the above SFT the health check of the SPIRE instrument in TV Test Phase 14 has been proven.

5 Appendix 1: SPIRE FM Short Functional Test

As-Run Procedure

(ref. HP-2-ASED-TP-0212, issue 2)

Title: **SPIRE FM Short Functional Test (Warm or Cold)**

CI-No: 125 200

Prepared by:	S. Hamer/ TERMA AS A. Koppe	Date:	13 th November 2008
Checked by:	S. Idler		14.11.2008
Product Assurance:	R. Stritter		13.11.08
Configuration Control:	W. Wietbrock		14/11/2008
Project Management:	W. Fricke		14/11/2008
TAS-F	D. Montet		

Distribution: See Distribution List (last page)

Copying of this document, and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of a utility model or design.

Issue	Date	Sheet	Description of Change	Release
1	30.01.08	All	First Formal Issue	
1.1	03.06.08	11 24 29,68 58 59 65 91 94 95,96 97	Typo in AD1, AD2, AD3 references Modification of text in chapter 7.2 Mode is "DRCU ON" with raw value x0100 Note for type 5/4 event included and typo in script name, step1, removed typo in script name, step1, removed typo in script name, step1, removed typo in negative voltage PLIAM9V (step2) typo in negative voltage SLIAM9V (step2) typo in script name, step1, removed typo in script name, step1, removed	
1.2	19.06.08	all	Implementation of updated RAL SFT procedure, ref. SPIRE-RAL-PRC-2494, issue 2.5 and red-markings according to as-run procedure of SFT performed on 9.06.2008	
1.3	24.10.08	All	Update of IEGSE check and TBTV specifics. Implementation of updated RAL SFT procedure, ref. SPIRE-RAL-PRC-2494, issue 2.6	
2.0	13.11.08	All	Correction of Switch ON & Operating temperatures limits for SPIRE in section 7.2.2 and 7.2.6	

Table of Content

1	Scope	8
1.1	Objective	8
1.2	Test Flow	8
2	Documents/Drawings	11
2.1	Applicable Documents	11
2.2	Reference Documents	11
2.3	Other Documents	12
2.4	Acronyms & Abbreviations	12
3	Configuration	16
3.1	Satellite Configuration	16
3.2	EGSE Configuration	16
3.3	Set-up	16
4	Test Scripts	17
5	Conditions	20
5.1	Personnel	20
5.2	Environmental	20
5.3	General Precautions and Safety	21
5.3.1	General Safety Requirements, Precautions	21
5.3.2	ESD constraints	21
5.3.3	Special QA Requirements	21
5.4	GSE	21
5.4.1	MGSE	21
5.4.2	CVSE	21
5.4.3	EGSE	21
5.4.4	OGSE	22
5.4.5	Special Equipment	22
6	Verification Requirements and Test Criteria	23
7	Test Procedure	24

7.1	Initial EGSE and Satellite Configuration for the Test	24
7.2	Step by Step Procedure	26
7.2.1	EGSE & Satellite Switch On	26
7.2.2	Switch On SPIRE PRIME To DRCU ON (Standby)	27
7.2.3	Short Functional Tests - Nominal	31
7.2.3.1	Procedure SPIRE-FM-SFT-FUNC-SCU-01-P	31
7.2.3.2	Procedure SPIRE-FM-SFT-FUNC-SCU-03-P	32
7.2.3.3	Procedure SPIRE-FM-SFT-FUNC-SCU-06-P	36
7.2.3.4	Procedure SPIRE-FM-SFT-FUNC-SCU-07-P	39
7.2.3.5	Procedure SPIRE-FM-SFT-FUNC-SCU-04-P	41
7.2.3.6	Procedure SPIRE-FM-SFT-FUNC-SCU-05-P	43
7.2.3.7	Procedure SPIRE-FM-SFT-FUNC-MCU-01-P	45
7.2.3.8	Procedure: SPIRE-FM-SFT-FUNC-MCU-02-P	47
7.2.3.9	Procedure SPIRE-FM-SFT-FUNC-BSM-01-P	48
7.2.3.10	Procedure SPIRE-FM-SFT-BSM-OFF-P	49
7.2.3.11	Procedure SPIRE-FM-SFT-FUNC-SMEC-01-P	50
7.2.3.12	Procedure SPIRE-FM-SFT-SMEC-OFF-P	51
7.2.3.13	Procedure SPIRE-FM-SFT-FUNC-DCU-01-P	52
7.2.3.14	Procedure SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P	53
7.2.3.15	Procedure SPIRE-FM-SFT-PLIA-OFF-P	55
7.2.3.16	Procedure SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P	56
7.2.3.17	Procedure SPIRE-FM-SFT-SLIA-OFF-P	58
7.2.3.18	Procedure SPIRE-FM-SFT-FUNC-MCU-OFF-P	60
7.2.3.19	Procedure SPIRE-FM-SFT-FUNC-SCU-OFF-P	62
7.2.4	Switch Off DRCU & DPU PRIME	64
7.2.5	Procedure SPIRE-FM-WFT-LPU-01-P	67
7.2.6	Switch On SPIRE REDUNDANT DPU & DRCU	69
7.2.7	Short Functional Tests - Redundant	73
7.2.7.1	Procedure SPIRE-FM-SFT-FUNC-SCU-01-R	73
7.2.7.2	Procedure SPIRE-FM-SFT-FUNC-SCU-03-R	74
7.2.7.3	Procedure SPIRE-FM-SFT-FUNC-SCU-06-R	78
7.2.7.4	Procedure SPIRE-FM-SFT-FUNC-SCU-07-R	80
7.2.7.5	Procedure SPIRE-FM-SFT-FUNC-SCU-04-R	83
7.2.7.6	Procedure SPIRE-FM-SFT-FUNC-SCU-05-R	84

7.2.7.7	Procedure SPIRE-FM-SFT-FUNC-MCU-01-R	86
7.2.7.8	Procedure: SPIRE-FM-SFT-FUNC-MCU-02-R	88
7.2.7.9	Procedure SPIRE-FM-SFT-FUNC-BSM-01-R	89
7.2.7.10	Procedure SPIRE-FM-SFT-BSM-OFF-R	90
7.2.7.11	Procedure SPIRE-FM-SFT-FUNC-SMEC-01-R	91
7.2.7.12	Procedure SPIRE-FM-SFT-SMEC-OFF-R	92
7.2.7.13	Procedure SPIRE-FM-SFT-FUNC-DCU-01-R	93
7.2.7.14	Procedure SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R	94
7.2.7.15	Procedure SPIRE-FM-SFT-PLIA-OFF-R	96
7.2.7.16	Procedure SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R	97
7.2.7.17	Procedure SPIRE-FM-SFT-SLIA-OFF-R	99
7.2.7.18	Procedure SPIRE-FM-SFT-FUNC-MCU-OFF-R	100
7.2.7.19	Procedure SPIRE-FM-SFT-FUNC-SCU-OFF-R	102
7.2.8	Switch Off DRCU & DPU REDUNDANT	104
7.2.9	Procedure SPIRE-FM-SFT-LPU-01-R	107
7.2.10	Satellite & EGSE Switch Off	108
7.2.11	SPIRE SAFE Switch Off	110
8	Summary Sheets	113
8.1	Procedure Variation Summary	114
8.2	Non Conformance Report (NCR) Summary	115
8.3	Sign-off Sheet	116

Table of Figures

No table of figures entries found.

List of Tables

Table 8.1-1: Procedure Variation Sheet114
Table 8.2-1: Non-Conformance Record Sheet115

1 Scope

This document describes the set of Short Functional Tests (SFTs) to be performed on the fully integrated SPIRE FM Instrument to check correct operation using the Herschel CCS without the need of connection to I-EGSE.

Specifically this procedure is part of the overall Satellite SFT which will be performed after shipment to ESTEC (SFT1) and also at the end of Environment Testing (SFT2). It can be performed in either Warm or Cold (Hel or Hell) conditions. Both redundancies are tested within this procedure.

It will also be executed during TBTV cold and hot phases.

Constraints

- Before carrying out the next procedure within the test sequence always ask for the go ahead by the SPIRE staff.
- SMEC
- Any text in boldface in the procedural steps generally indicates an action which may have to be performed manually by the CCS staff.

1.1 Objective

1. The objective of the test is to perform a short "health-check" of the FM instrument.

1.2 Test Flow

This test flow is structured to reflect nominal operations of the FM SPIRE.

The flow is as follows:

1. Power on and configure SPIRE I-EGSE for test if required
2. Power on and configure SVM for test
3. Power on SPIRE Prime and enable Mil1553B-bus interface
4. Run Nominal SFT Procedures as per table 1.2-1
5. Disable Mil1553B-bus interface and Power off SPIRE Prime
6. Power on SPIRE Redundant and enable Mil1553B-bus interface
7. Run Redundant SFT Procedures as per table 1.2-2
8. Disable Mil1553B-bus interface and Power off SPIRE Redundant
9. Power off SVM
10. Switch off all EGSE

Step #	Procedure Name	Purpose	Duration
1.	SPIRE-FM-SFT-FUNC-SCU-01-P	SCU Nominal Science Packet Generation Check PRIME	3 min
2.	SPIRE-FM-SFT-FUNC-SCU-03-P	SCU DC Thermometry check PRIME	8 min
3.	SPIRE-FM-SFT-FUNC-SCU-06-P	SCU AC Thermometry check PRIME	2 min
4.	SPIRE-FM-SFT-FUNC-SCU-07-P	Sorption Cooler Heaters Check PRIME	5 min
5.	SPIRE-FM-SFT-FUNC-SCU-04-P	Photometer Calibrator Check PRIME	3 min
6.	SPIRE-FM-SFT-FUNC-SCU-05-P	Spectrometer Calibrator Check PRIME	5 min
7.	SPIRE-FM-SFT-FUNC-MCU-01-P	MCU Boot Check PRIME	5 min
8.	SPIRE-FM-SFT-FUNC-MCU-02-P	MCU Nominal Science Packet Generation Check PRIME	5 min
9.	SPIRE-FM-SFT-FUNC-BSM-01-P	BSM Chop/Jiggle Sensors check PRIME	3 min
10.	SPIRE-FM-SFT-BSM-OFF-P	BSM switch OFF PRIME	3 min
11.	SPIRE-FM-SFT-FUNC-SMEC-01-P	SMEC Encoder and LVDT check PRIME	3 min
12.	SPIRE-FM-SFT-SMEC-OFF-P	SMEC switch OFF	3 min
13.	SPIRE-FM-FUNC-DCU-01-P	DCU Science Packet Generation Check PRIME	5 min
14.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P	Photometer LIAs Check PRIME	5 min
15.	SPIRE-FM-SFT-PLIA-OFF-P	Photometer LIAs Switch OFF PRIME	2 min
16.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P	Spectrometer LIAs Check PRIME	5 min
17.	SPIRE-FM-SFT-SLIA-OFF-P	Spectrometer LIAs Switch OFF PRIME	2 min
18.	SPIRE-FM-SFT-FUNC-MCU-OFF-P	MCU switch OFF PRIME	2 min
19.	SPIRE-FM-SFT-FUNC-SCU-OFF-P	SCU Switch OFF PRIME	2 min
20.	SPIRE-FM-SFT-LPU-01-P	Checkout of LPU PRIME	5 min

Table 1.2-1 SPIRE Prime Functional Procedures

Step #	Procedure Name	Purpose	Duration
1.	SPIRE-FM-SFT-FUNC-SCU-01-R	SCU Nominal Science Packet Generation Check REDUNDANT	3 min
2.	SPIRE-FM-SFT-FUNC-SCU-03-R	SCU DC Thermometry Check REDUNDANT	8 min
3.	SPIRE-FM-SFT-FUNC-SCU-06-R	SCU AC Thermometry Check REDUNDANT	2 min
4.	SPIRE-FM-SFT-FUNC-SCU-07-R	Sorption Cooler Heaters Check REDUNDANT	5 min
5.	SPIRE-FM-SFT-FUNC-SCU-04-R	Photometer Calibrator Check REDUNDANT	3 min
6.	SPIRE-FM-SFT-FUNC-SCU-05-R	Spectrometer Calibrator Check REDUNDANT	5 min
7.	SPIRE-FM-SFT-FUNC-MCU-01-R	MCU Boot Check REDUNDANT	5 min
8.	SPIRE-FM-SFT-FUNC-MCU-02-R	MCU Nominal Science Packet Generation Check REDUNDANT	5 min
9.	SPIRE-FM-SFT-FUNC-BSM-01-R	BSM Chop/Jiggle Sensors check REDUNDANT	3 min

10.	SPIRE-FM-SFT-BSM-OFF-R	BSM Switch OFF REDUNDANT	3 min
11.	SPIRE-FM-SFT-FUNC-SMEC-01-R	SMEC Encoder and LVDT check REDUNDANT	3 min
12.	SPIRE-FM-SFT-SMEC-OFF-R	SMEC Switch OFF	3 min
13.	SPIRE-FM-FUNC-DCU-01-R	DCU Science Packet Generation Check REDUNDANT	5 min
14.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R	Photometer LIAs Check REDUNDANT	5 min
15.	SPIRE-FM-SFT-PLIA-OFF-R	Photometer LIAs Switch OFF REDUNDANT	2 min
16.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R	Spectrometer LIAs Check REDUNDANT	5 min
17.	SPIRE-FM-SFT-SLIA-OFF-R	Spectrometer LIAs Switch OFF REDUNDANT	2 min
18.	SPIRE-FM-SFT-FUNC-MCU-OFF-R	MCU Switch OFF REDUNDANT	2 min
19.	SPIRE-FM-SFT-FUNC-SCU-OFF-R	SCU Switch OFF REDUNDANT	2 min
20.	SPIRE-FM-SFT-LPU-01-R	Checkout of LPU REDUNDANT	5 min

Table 1.2-2: SPIRE Redundant Functional Procedures

2 Documents/Drawings

2.1 Applicable Documents

AD 1	FM SPIRE PFM Final Electrical Integration Procedure	HP-2-ASED-TP-0166
AD 2	Herschel PCDU & CDMS Nominal Switch On/Off Procedure, Issue 1	HP-2-ASED-PR-0070
AD 3	Herschel SAT Emergency Switch Off Procedure	HP-2-ASED-PR-0071
AD 4	PA Plan	HP-2-ASED-PL-0007
AD 6	Test Specification for Herschel Instrument AVM & FM Tests Performed at Satellite Level, Issue 2	H-P-2-ASP-TS-1083
AD 7	H-P GDIR	H-P-1-ASPI-SP-0027
AD 8	SPIRE I-EGSE Set-Up, Issue 2.1	SPIRE-RAL-DOC-002841

2.2 Reference Documents

RD 1	Herschel Planck Central Checkout System System User Manual	H-P-4-TE-MA-0010
RD 2	SPIRE FM Short Functional Test Procedures	SPIRE-RAL-PRC-2494, iss. 2.6
RD 3	Herschel CDMU ASW S/W Interface Control Document	H-P-4-SSF-IC-0001
RD 4	Herschel CDMU BSW S/W Interface Control Document	H-P-4-SES-NT-0076
RD 5	SPIRE IID-B	SCI-PT-IIDB/SPIRE-02124
RD 6	SPIRE Functional Test Specification Iss. 1.4	SPIRE-RAL-DOC-001652
RD 7	SPIRE Instrument User Manual Iss. 1.3	SPIRE-RAL-PRJ-002395
RD 8	H/P OBT-UTC Time Synchronisation Technical Note Iss. 1.3	PT-CMOC-OPS-TN-6604-OPS- OGH

2.3 Other Documents

None

2.4 Acronyms & Abbreviations

1553	MIL-STD-1553B conform communication interface
AAD	Attitude Anomaly Detector
ACC	ACMS Control Computer
ACMS	Attitude Control and Measurement Subsystem
AD	Applicable Document
AIR	ACC In Reconfiguration
AIT	Assembly, Integration and Test
AIV	Assembly, Integration and Verification
APID	Application Process ID
ASW	Application Software
AVM	Avionics Model
BOLC	BOLometer Control unit (PACS)
BSW	Basic Software
CBH	Catalyst Bed Heater
CCS	Central Check-out System
CCSDS	Consultative Committee for Space Data Systems
CDMU	Control and Data Management Unit
CDMS	Control and Data Management Sub-system
CIR	CDMU In Reconfiguration
CLCW	Command Link Control Word
CLTU	Command Link Transmission Unit
CPDU	Command Pulse Distribution Unit
CRS	Coarse Rate Sensor
CTR	Central on board Reference Time
DCU	Detector Control Unit (SPIRE)
DEC	Detectors Electronics Control unit (PACS)
DMC	Detector and Mechanism Control unit (PACS)
DPU	Digital Processing Unit

DRCU	Detector Readout & Control Unit (SPIRE)
EEPROM	Electrically Erasable PROM
EGSE	Electrical Ground Support Equipment
FCL	Fold-back Current Limiter
FCU	FPU Control Unit (Spire)
FCV	Flow Control Valves
FDIR	Failure Detection, Isolation, and Recovery
FPU	Focal Plane Unit
GDIR	General Design and Interface Requirement
GRP	Group Heaters Switch
HBR	High Bit Rate
HL/HLC	High Level command
HP/HPC	High Priority commands
HPLM	Herschel PayLoad Module
HPADB	Herschel Planck System Data Base
HW	Hardware
i.a.w.	In accordance with
I/F	InterFace
I/O	Input/Output
ICD	Interface Control Document
IST	Integrated System Test
LCL	Latching Current Limiter
LV	Latching Valves
LBR	Low Bit Rate
MAP	Multiplexed Access Point
MBR	Medium Bit Rate
MCU	Mechanisms Control Unit (SPIRE)
MEC	Mechanisms Electronics Control unit (PACS)
ML 16	Memory Load command (ML 16)
MM	Memory Module
MOIS	Mission Operations Information System
MTL	Mission Timeline

NRZ-L	Non Return to Zero – Litton
OBCP	On-Board Control Procedure
OBDH	On-Board Data Handling
OBMF	On-Board Monitoring Function
OBRT/OBT	On-Board Reference Time
OIRD	Operation Interface Requirement Document
PACS	Photodetector Array Camera & Spectrometer
P/L	Payload
PCDU/PCS	Power Control Distribution Unit/Power Control Subsystem
PM	Processor Module
PROM	Programmable Read Only Memory
PSK	Phase Shift Keying
RA	Rate Anomaly
RAM	Random Access Memory
RCS	Reaction Control Subsystem
RD	Reference Document
RF	Radio Frequency
RM	Reconfiguration Module
RT	1553 Remote Terminal
RTU	RT Unit
RTA	RTU
RWL	Reaction Wheel Assembly
SA	1553 Remote Terminal Sub Address
SAS	Sun Acquisition Sensor
SCOE	Special Check-out Equipment
SCU	Subsystems Control Unit (SPIRE)
SIR	S/C In Reconfiguration
SIT	Subsystem Integrated Test
SP	Sun Pointing
SPIRE	Spectral & Photometric Imaging Receiver
SPU	Signal Processing Unit (PACS)
SSMM	Solid State Mass Memory

STR	Star Tracker
SVM	Service Module
SW	Software
TAI	International Atomic Time
TC	TeleCommand
TFG	Transfer Frame Generator
TM	TeleMetry
TTC	Telemetry Tracking & Command subsystem
TTR	Telemetry Telecommand and Reconfiguration
UFT	Unit Functional Test
VC	Virtual Channel
WD	Watchdog

3 Configuration

3.1 Satellite Configuration

The test requires use of the FM SVM powered on in its basic test mode (i.e. quick switch on (PCDU & CDMS) in accordance with AD 2. SPIRE FM units will be powered ON as per this procedure and assumes that FPU has already been successfully integrated to the warm units.

The procedures detailed in this document can be executed in any foreseen orientation.

3.2 EGSE Configuration

This test requires the EGSE to be configured and elements powered on in accordance with AD 2.

I-EGSE can be configured and connected to the HPCCS in accordance with AD 8, however it is not mandatory to have the I-EGSE connected for the SFT.

3.3 Set-up

SPIRE Test Scripts for the test must be loaded on to the HPCCS and checked in prior to start of test.

4 Test Scripts

The following SPIRE test scripts are required for execution on the HPCCS they do NOT reflect the test steps or order in which the steps are executed (the latter is defined in the order of the procedure):

No.	Tcl Script Name	Comment	Confirmed
1.	SPIRE-FM-SFT-DPU-START-P-SP	DPU ON PRIME	
2.	SPIRE-FM-SFT-DRCU-START-P-STEP1	DRCU ON PRIME Step1	
3.	SPIRE-FM-SFT-DRCU-START-P-STEP2	DRCU ON PRIME Step2	
4.	SPIRE-FM-SFT-FUNC-SCU-01-P	SCU science generation check	
5.	SPIRE-FM-SFT-FUNC-SCU-03-P	SCU DC thermometry check	
6.	SPIRE-FM-SFT-FUNC-SCU-06-P	SCU AC thermometry check	
7.	SPIRE-FM-SFT-FUNC-SCU-07-P	Sorption Cooler Heater Check	
8.	SPIRE-FM-SFT-FUNC-SCU-04-P	Photometer Calibration Check	
9.	SPIRE-FM-SFT-FUNC-SCU-05-P	Spectrometer Calibration Check	
10.	SPIRE-FM-SFT-FUNC-MCU-01-P	MCU (Prime) Boot Check	
11.	SPIRE-FM-SFT-FUNC-MCU-02-P	MCU Nominal Frame Generation Check	
12.	SPIRE-FM-SFT-FUNC-BSM-01-P	BSM (Prime) Chop/Jiggle Sensor Check	
13.	SPIRE-FM-SFT-BSM-OFF-P	BSM (Prime) Switch OFF	
14.	SPIRE-FM-SFT-FUNC-DCU-01-P	DCU Nominal Science Packet Generation Check PRIME	
15.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P	Photometer LIAs Check PRIME	
16.	SPIRE-FM-SFT-PLIA-OFF-P	Photometer LIAs Switch OFF PRIME	
17.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P	Spectrometer LIAs Check PRIME	
18.	SPIRE-FM-SFT-SLIA-OFF-P	Spectrometer LIAs Switch OFF PRIME	
19.	SPIRE-FM-SFT-MCU-OFF-P	MCU Switch OFF PRIME	
20.	SPIRE-FM-SFT-SCU-OFF-P	SCU Switch OFF PRIME	
21.	SPIRE-FM-SFT-DRCU-OFF-P	DRCU Switch OFF PRIME	
22.	SPIRE-FM-SFT-FUNC-SMEC-01-P	SMEC Encoder and LVDT check PRIME	
23.	SPIRE-FM-SFT-SMEC-OFF-P	SMEC Switch OFF PRIME	
	REDUNDANT UNIT SCRIPTS		
24.	SPIRE-FM-SFT-DPU-START-R-PP	DPU ON REDUN	
25.	SPIRE-FM-SFT-DRCU-START-R-STEP1	DRCU ON REDUN Step1	

No.	Tcl Script Name	Comment	Confirmed
26.	SPIRE-FM-SFT-DRCU-START-R-STEP2	DRCU ON REDUN Step2	
27.	SPIRE-FM-SFT-FUNC-SCU-01-R	SCU Nominal Science Packet Generation Check REDUN.	
28.	SPIRE-FM-SFT-FUNC-SCU-03-R	SCU DC Thermometry Check REDUN.	
29.	SPIRE-FM-SFT-FUNC-SCU-06-R	SCU AC Thermometry Check REDUN.	
30.	SPIRE-FM-SFT-FUNC-SCU-07-R	Sorption Cooler Heaters Check REDUN.	
31.	SPIRE-FM-SFT-FUNC-SCU-04-R	Photometer Calibrator Check REDUN.	
32.	SPIRE-FM-SFT-FUNC-SCU-05-R	Spectrometer Calibrator Check REDUN.	
33.	SPIRE-FM-SFT-FUNC-MCU-01-R	MCU Boot Check REDUN.	
34.	SPIRE-FM-SFT-FUNC-MCU-02-R	MCU Nominal Science Packet Generation Check REDUN.	
35.	SPIRE-FM-SFT-FUNC-BSM-01-R	BSM Chop/Jiggle Sensors Check REDUN.	
36.	SPIRE-FM-SFT-BSM-OFF-R	BSM Switch OFF REDUN.	
37.	SPIRE-FM-SFT-FUNC-DCU-01-R	DCU Nominal Science Packet Generation Check REDUN.	
38.	SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R	Photometer LIAs Check REDUN.	
39.	SPIRE-FM-SFT-PLIA-OFF-R	Photometer LIAs Switch OFF REDUN.	
40.	SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R	Spectrometer LIAs Check REDUN.	
41.	SPIRE-FM-SFT-SLIA-OFF-R	Spectrometer LIAs switch OFF REDUN.	
42.	SPIRE-FM-SFT-MCU-OFF-R	MCU Switch OFF REDUN.	
43.	SPIRE-FM-SFT-SCU-OFF-R	SCU Switch OFF REDUN.	
44.	SPIRE-FM-SFT-DRCU-OFF-R	DRCU Switch OFF REDUN	
45.	SPIRE-FM-SFT-FUNC-SMEC-01-R	SMEC Encoder and LVDT Check REDUN.	
46.	SPIRE-FM-SFT-SMEC-OFF-R	SMEC Switch OFF REDUN.	

The HPCSS must also have the following MIB files for SPIRE loaded:

HPCSS Software	Version	Comment	Confirmed Installed
SPIRE MIB version			

The SPIRE I-EGSE will be running the following software for the test:

I-EGSE Software	Version	Comment
SPIRE MIB version		
SCOS version		

5 Conditions

5.1 Personnel

Responsibility	Name / Organisation
Test Director	
Test Conductor	
EGSE Operator	
Electrical Engineer	
Specialist Engineer	
Element Cognizant	
PA Responsible	
Instrument Representative	
Customer Representative	
ESA Representative	

5.2 Environmental

The actual clean room environmental conditions for the test shall be recorded below.

Environmental	Nominal	Actual	P	N
Clean Room Class	class 100000 or better			
Temperature	22°C ± 3°C			
Rel. Humidity	40 % - 60 %			
Pressure	Ambient			

S/C Cryo conditions: see section 7.1

5.3 General Precautions and Safety

Non-test specific precautions and safety considerations are detailed in section 5.3 of AD 2. Specific safety issues and general precautions for the tests to be performed are detailed in the following sections.

5.3.1 General Safety Requirements, Precautions

In the event of unrecoverable anomaly requiring emergency switch off of the satellite, the switch off shall be performed in accordance with AD 3.

5.3.2 ESD constraints

Normal ESD constraints are to be observed during the test.

5.3.3 Special QA Requirements

None.

5.4 GSE

Non-test specific GSE details are provided in section 5.4 of AD 2. Specific GSE needs for the tests to be performed are detailed in the following sections.

5.4.1 MGSE

None.

5.4.2 CVSE

None.

5.4.3 EGSE

The I-EGSE is not mandatory for this test, but if used can be connected to the HPCCS in accordance with AD 8.

5.4.4 OGSE

None.

5.4.5 Special Equipment

None.

6 Verification Requirements and Test Criteria

This is a short functional check of all SPIRE PFM subsystems in warm or cold conditions. No specific requirements are to be verified.

Functional performance and status parameter actual values recorded will be checked during the test and must be the same as the nominal status value indicated.

The test will only be deemed successful once all offline analysis of the results has been performed. Typically, the PTR will be held before completion of this activity and therefore only a preliminary assessment of the test success can be provided to allow disconnection of any specific GSE required for the test and which needs to be removed before further activities can be performed.

Enter Start Date Time:				
------------------------	--	--	--	--

7 Test Procedure

7.1 Initial EGSE and Satellite Configuration for the Test

The Spire FM Final Integration according to the Test Procedure ref. AD 1 must be successfully completed before the execution of this procedure.

The EGSE and Satellite must be configured according to AD 2 prior to start of test.

In case of anomaly on SPIRE requiring immediate switch off as directed by SPIRE responsible supporting the test section 7.2.11 shall be executed.

In the event of emergency the Satellite SHALL be switched down according to AD 3.

Test Location:	
Test Session Id(s):	
Environment:	

Enter Date/Time:			Sign Off	TC:		PA:	
------------------	--	--	----------	-----	--	-----	--

Enter Start Date Time:					
-------------------------------	--	--	--	--	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
	SPIRE: OFF						
0.1	Check that all open work identified at the TRR is closed	OK					
0.2	Check SPIRE FPU interface temperatures (throughout the test):						
	Level 0 (HTT upper bulk) T222	As per TRR					
	Level 1 (Vent line) T234	As per TRR					
	Level 2 (OBA) T242	As per TRR					
0.3	No constraints on thermal shield or CVV	N/A					
0.4	Check cover temperature	As per TRR					
0.5	Stability (drifting)						
	L0	As per TRR					
	L1/L2	As per TRR					
0.6	Check cryostat angle Keep angle constant throughout the test	As per TRR					
	SPIRE: OFF						

Enter Date/Time:			Sign Off	TC:		PA:
-------------------------	--	--	-----------------	------------	--	------------

Enter Start Date Time:			
-------------------------------	--	--	--

7.2 Step by Step Procedure

7.2.1 EGSE & Satellite Switch On

The following test steps are not applicable for TBTV tests.

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remarks	P	N
Install Test Box and Satellite & EGSE Switch On							
1.1	Confirm I-EGSE physically connected to HPCCS	OK			Steps 1.1, 1.3 to 1.7 are not mandatory for test execution		
1.2	If not already on, switch on HPCCS, SCOE's and Satellite/SVM and configure into Basic Test Mode i.a.w. AD 2 Section 7.1 to 7.5						
1.3	Confirm that EGSE and Satellite are in the correct configuration as per AD 2	OK					
1.4	Switch on & configure SPIRE I-EGSE i.a.w. AD 8						
1.5	Confirm SPIRE I-EGSE is in the correct configuration as per AD 8	OK					
1.6	From HPCCS Test Conductor console issue command to connect to SPIRE I-EGSE connect HSPIREEGSE	YZS29940 = connected					
1.7	Verify correct connection and time synchronisation with IEGSE: Y102999ETVT036_ASDGEN_VERSPIREIEGSE	OK					
READY FOR START OF SPIRE SFT							

Enter Date/Time:			Sign Off	TC:		PA:
-------------------------	--	--	-----------------	------------	--	------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.2 Switch On SPIRE PRIME To DRCU ON (Standby)

During power on of SPIRE a number of soft/hard OOLs are reported due to the sequential switch on of the units. This is expected and will clear when SPIRE is in DRCU ON mode. When in DRCU ON mode one parameter remains OOL (soft) namely SMD2V505 (NCR3955 refers) this is also expected.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	ONLY APPLICABLE FOR TBTV: Verify the following TCS baseplate temperature for SPIRE Warm Units before switching ON: HSDCU (DEA88710)	> -30°C & < +45°C	42.3°C		✓	
2.	On HPCCS start Packet History displays for the following APIDs: 1280, 1282	OK	OK		✓	
3.	From the HPCCS test conductor console start the test script to power SPIRE Prime to DRCU ON mode: S102999SCVT005_ASDFSFTSPIR_PWR_ON_P				✓	
4.	On HPCCS when prompted: "SPIRE Switch ON for SFT related tests in any conditions - Select NO to abort TS if not correct"	YES	YES		✓	

06:38


δ
δ
δ
δ

Enter Date/Time:	11/12/08	06:38	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

Enter Start Date Time:					
-------------------------------	--	--	--	--	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	If in any doubt about the script being executed NO should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.		N/A			
6.	If YES is selected the test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW and configure the instrument to DRCU ON mode.		YES	A number of soft/hard OOL's are reported	✓	
7.	On HPCCS when prompted: "Check Telemetry Updating Correctly and OBT is Consistent with CDMU - OK to continue"	OK THSK = TSYNC	OK		✓	
8.	If I-EGSE connected when prompted on HPCCS, perform check requested: "Check IEGSE Time Consistent - OK to continue when RAL confirm"	OK	N/A		✓	
9.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:		OK	AND: SA_1_559	✓	

§
§
§
§

Enter Date/Time:	11/11/08	06:45	Sign Off	TC: 	PA:
-------------------------	----------	-------	-----------------	--	------------

Enter Start Date Time:			
------------------------	--	--	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
		THSK Not refreshing TM2N Not incrementing	Not incrementing		✓	
10.	Select OK to continue	OK	OK		✓	
11.	On HPCCS when prompted: "Check Telemetry Updating Correctly - OK to continue" Check that parameters:	THSK Refreshing @ 1Hz TM2N Incrementing by 1 @ 1Hz	1 Hz 1 Hz	AND: SA_1_559	✓	
12.	Select OK to continue	OK	OK		✓	
13.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT005_ASDFSFTSPIR_PWR_ON_P it will prompt: "Set Bus Profile Back to Original Setting?" Select NO	NO	No		✓	

or
or
or
or
or

Enter Date/Time:	11/12/08	06:47	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

Enter Start Date Time:				
------------------------	--	--	--	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
14.	At the prompt: "Bus Profile left unchanged" Select OK to continue	OK	ok		✓	
15.	Verify HK TM packets are being received on APIDs 1280 & 1282		ok		✓	
16.	MODE parameter is set to "DRCU ON" mode (RAW value 0x0100)	SM00M500 = 0x0100 (DRCU ON)	DRCU_on	AND: SA_1_559	✓	
17.	ONLY APPLICABLE FOR TBTV: Verify the following TCS baseplate temperature for SPIRE Warm Units before operating SPIRE: HSDCU (DEA88710) > -15°C & < +45°C		41.79 °C		✓	
	SPIRE powered and in DRCU ON mode					

§
§
§
§

Enter Date/Time:	M/AE/08	06:48	Sign Off	TC:	PA:
------------------	---------	-------	----------	-----	-----

Enter Start Date Time:			
-------------------------------	--	--	--


7.2.3 Short Functional Tests - Nominal

7.2.3.1 Procedure SPIRE-FM-SFT-FUNC-SCU-01-P

Version	2.4
Date	4 th June 2008
Purpose	SCU science packet generation check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS and DPU & OBS PARAMETERS displays are selected on the CCS
Duration	3 minutes
Pass/Fail Criteria	Specified SCU HK parameters show expected increment.

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-01-P.tcl	SCUFRAMECNT (On SFT PARAMETERS display) TM5N (On DPU & OBS PARAMETERS display)	0/31 0x3FFF/1	0/31 0x3FFF/1	✓ 8
Test Result (Pass/Fail): PASS					

Enter Date/Time:	11/12/08	06:52	Sign Off	TC: 	PA:
-------------------------	----------	-------	-----------------	--	------------

Enter Start Date Time:			
-------------------------------	--	--	--

7.2.3.2 Procedure SPIRE-FM-SFT-FUNC-SCU-03-P

Version	2.3
Date	28 th August 2007
Purpose	SCU DC thermometry check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	8 minutes
Pass/Fail Criteria	DC Thermometry channels show temperature readings according to the actual instrument temperature* *: At warm temperatures all channels should show short circuit RAW readings of -32768

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-03-P.tcl	—	—	— ✓	— ✓
2	Wait for the parameter BBFULLTYPE to get set to SCU_DC_Therm				✓

Enter Date/Time:	11/12/08	06:59	Sign Off	TC:	PA:
-------------------------	----------	-------	-----------------	------------	------------

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	A few seconds later record the value of parameter SCUTEMPSTAT	SCUTEMPSTAT	0/0xFFFF/0xFFFF	0/0xFFFF	✓
4	<p>If the instrument is at He II temperatures check the values of SCU DC thermometry channels.</p> <p>Note that the measured channel values will depend on the actual cryostat Level 0 and Level 1 temperatures.</p>	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP EMCFILTEMP SL0TEMP PL0TEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP BSMTEMP	~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L0 K ~ L0 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K	See attached	✓
5	If the instrument is at He I				

5
8

Enter Date/Time: 11/11/08 06:55 Sign Off [Signature] TC: PA:

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
	temperatures check the values of SCU DC thermometry channels. Note that the measured channel values will depend on the actual cryostat Level 1 temperature.	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP EMCFILTEMP SL0TEMP PL0TEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP BSMTEMP	~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K	N/A	✓
6	If the instrument is warm: Configure the SFT PARAMETERS display to show the RAW values of SCU DC	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP EMCFILTEMP	— — — — —	N/A	✓

Enter Date/Time: 11/12/08 06:56 Sign Off TC:  PA:

DS: 65535 ID: SA_7_5 Title: SFT PARAMETERS


Sample Time: 2008.346.06.54.55.011

Workstation: hpws23

NAME	DESCRIPTION	VALUE	UNIT	NAME	DESCRIPTION	VALUE	UNIT
SM10N500	OBSID	B0000000	HEX	SM_1V520	SCUP9V	9.0899	V
SM2LN500	BBFULLTYPE	Null		SM_2V520	SCUM9V	-9.0862	V
SM00M500	MODE	DRCU_ON		SMT0A520	EVHSV	-0.0189	mV
SM00T500	THSK	2008.346.06.54.54.462	HEX	SMH0A520	SPHSV	0.0535	mV
SMT1N500	TM2N	00000315	HEX	SMT1A520	SPHTRV	0.0023	V
SMD1N510	DCUFRAMECNT	0		SMP0V520	PCALV	9.4e-05	V
SMD0N515	MCUFRAMECNT	0		SMP0A520	PCALCURR	0.000679	mA
SMD0N520	SCUFRAMECNT	31		SMS0V520	SCAL2V	3.6e-05	V
SMB6V510	BIASP5V	5.17	V	SMS0A520	SCAL2CURR	-0.000432	mA
SMB7V510	BIASP9V	8.99	V	SMS1V520	SCAL4V	6.8e-05	V
SMB8V510	BIASM9V	-9.05	V	SMS1A520	SCAL4CURR	-0.000265	mA
SML0V510	PLIAP5V	0.32	V	SMK0F520	SUBKSTAT	00000000	HEX
SML1V510	PLIAP9V	0.014	V	SMF0K520	PUMPHTRTEMP	5.05456926	K
SML2V510	PLIAM9V	0.015	V	SMF1K520	PUMPHSTEMP	2.06224581	K
SML3V510	SLIAP5V	0.13	V	SMF2K520	EVAPHSTEMP	2.23752355	K
SML4V510	SLIAP9V	0.016	V	SMF3K520	SHUNTTEMP	1.79535381	K
SML5V510	SLIAM9V	0.016	V	SMF4K520	EMCFILTEMP	2.51776201	K
SM_4V515	MCUP5V	20.00	V	SMF5K520	SLOTTEMP	1.77923361	K
SM_2V515	MCUP14V	75.36	V	SMF6K520	PL0TEMP	1.78812194	K
SM_3V515	MCUM14V	75.36	V	SMF7K520	OPTTEMP	2.53707674	K
SM_0V515	MCUP15V	75.36	V	SMF8K520	BAFTEMP	2.55788363	K
SM_1V515	MCUM15V	75.36	V	SMF9K520	BSMIFTEMP	2.52641839	K
SMM0K515	MCUMACTEMP	1651.51	K	SMS0K520	SCAL2TEMP	2.51624694	K
SMF0K515	MCUSMECTEMP	1651.51	K	SMS1K520	SCAL4TEMP	2.44177221	K
SMB0K515	MCUBSMTEMP	1651.51	K	SMS2K520	SCALTEMP	2.51915836	K
SMS0W515	SMECENCPOWER	0000FFFF	HEX	SMFAK520	SMECIFTEMP	2.50509217	K
SMS1W515	SMECLVDTPWR	0000FFFF	HEX	SMFBK520	SMECTEMP	2.51875099	K
SMS1M515	SMECLOOPMODE	0000FFFF	HEX	SMFCK520	BSMTEMP	2.50848134	K
SMC0W515	CHOPSENSPOWER	0000FFFF	HEX	SMK0K520	SUBKTEMP	804.42700000	K
SMJ0W515	JIGGSENSPOWER	0000FFFF	HEX	SM_0X520	PLIABITSTAT	00000000	HEX
SM_1F520	SCUTEMPSTAT	0000FFFF	HEX	SM_1X520	SLIABITSTAT	00000000	HEX
SM_0V520	SCUP5V	5.2403	V	SM_2X520	MCUBITSTAT	00000000	HEX

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
	<p>thermometry channels.</p> <p>Record the RAW values of SCU DC thermometry channels. Nominal values should show a short circuit status (or RAW - 32768).</p> <p>Non Nominal (Open Circuit Criterion): RAW reading in the range [0, -100]</p>	SLOTEMP PLOTEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP BSMTEMP	— — — — — — — — — — —		
Test Result (Pass/Fail): PASS					

Enter Date/Time:	11/12/08	06:56	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.3.3 Procedure SPIRE-FM-SFT-FUNC-SCU-06-P

Version	2.3
Date	28 th August 2007
Purpose	SCU AC thermometry check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and DC thermometry is ON
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail Criteria	AC Thermometry channel shows temperature readings according to the actual instrument temperature

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-06-P.tcl	—	—	— ✓	✓
2	Wait for the parameter BBFULLTYPE to get set to SCU_AC_Therm		SCU_AC_Therm	✓	✓
3	A few seconds later record the value of parameter	SUBKSTAT	0/1/1	0/1/1	✓

06:59


07:00

Enter Date/Time:	11/28/07	07:00	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date/Time:					
------------------------	--	--	--	--	--

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
	SUBKSTAT				
4	If the instrument is at He II temperatures check the value of SCU AC thermometry channel. Note that the measured channel value will depend on the cryostat Level 0 temperature.	SUBKTEMP	~L0 K	1.89 K	✓
5	If the instrument is at He I temperatures check the value of SCU AC thermometry channel. Note that the measured channel value will depend on the cryostat Level 1 temperature.	SUBKTEMP	~L1 K	N/A	✓
6	If the instrument is warm: Configure the SFT PARAMETERS display to show the RAW value of SCU AC thermometry channel. Only record the RAW value of SCU AC thermometry channel if it indicates an open circuit. Open Circuit Criterion: RAW reading in the range [0, -100]	SUBKTEMP	—	N/A	✓

§
§
§

Enter Date/Time:	11/16/08	07:00	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
Test Result (Pass/Fail): <i>PASS</i>					

Enter Date/Time:	<i>11/13/08</i>	<i>07:00</i>	Sign Off	TC: <i>[Signature]</i>	PA:
------------------	-----------------	--------------	----------	------------------------	-----

Enter Start Date Time:					
------------------------	--	--	--	--	--

7.2.3.4 Procedure SPIRE-FM-SFT-FUNC-SCU-07-P

Version	2.2
Date	2 nd January 2007
Purpose	Sorption Cooler Heater Check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and DC thermometry is ON
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail Criteria	Sorption cooler heat switches and pump heater show expected voltages

Procedure Steps:


Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
07:22	1 Execute TCL script SPIRE-FM-SFT-FUNC-SCU-07-P.tcl	—	—	— ✓	✓
	2 Wait for the parameter BBFULLTYPE to get set to Cooler_Htr_Che	BBFULLTYPE	Cooler_Htr_Che	Cooler_Htr_Che	✓
	3 Record the value of parameter SPHSV – the Sorption Pump Heat Switch Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	SPHSV - mV	0/~323/0	0/324/0	✓

Enter Date/Time:	11/11/08	07:22	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
4	Record the value of parameter EVHSV – the Evaporator Heat Switch Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	EVHSV - mV	0/~323/0	0/324/0	J
5	Record the value of parameter SPHTRV – the Sorption Pump Heater Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	SPHTRV - V	0/~8.8/0	0/8.85v/0	J
Test Result (Pass/Fail): PASS					

§
§

Enter Date/Time: 11/16/08 07:22 Sign Off TC:  PA:

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.5 Procedure SPIRE-FM-SFT-FUNC-SCU-04-P

Version	2.3
Date	28 th August 2007
Purpose	Photometer Calibration Check (PRIME)
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail Criteria	PCAL voltage and current agree with expected values

Enter Date/Time:	11/11/08	07:23	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date|Time: _____

Procedure Steps:

Step	Description	Parameter Name - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-04-P.tcl The expected values during the test should be monitored when parameter BBFULLTYPE in the SFT PARAMETERS display is set to PCAL_Check This usually happens about 30 seconds from the start of test execution.	PCALCURR - mA PCALV - V BBFULLTYPE	0.0/0.1/0.0 0.0/~0.02/0.0 PCAL_Check	0/0.1/0 0/0.02/0 PCAL_Check	✓

07:03

0

Test Result (Pass/Fail): **PASS**

Enter Date/Time: 11/12/08 07:04 Sign Off [Signature] TC: [Signature] PA: _____

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.6 Procedure SPIRE-FM-SFT-FUNC-SCU-05-P

Version	2.3
Date	28 th 2007
Purpose	Spectrometer Calibration Check (PRIME)
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	SCAL2 and SCAL4 voltage and currents agree with expected values


Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-05-P.tcl	—	—	✓	✓
2	Wait for the parameter BBFULLTYPE to get set to SCAL4_Check	BBFULLTYPE	SCAL4_Check	SCAL4_Che✓	✓

07:05

✓

✓

Enter Date/Time:	11/12/08	07:05	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	A few seconds later record the value of parameters SCAL4CURR and SCAL4V <i>These parameters are set back to 0 after ~20 seconds</i>	SCAL4CURR – mA SCAL4V – V	0.0/~0.10/0.0 0.0/~0.05/0.0	0/0.1 / 0 0/0.05 / 0	✓
4	Wait for the parameter BBFULLTYPE to get set to SCAL2_Check	BBFULLTYPE	SCAL2_Check	SCAL2_Check	✓
5	A few seconds later record the values of parameters SCAL2CURR and SCAL2V <i>These parameters are set back to 0 after ~20 seconds</i>	SCAL2CURR – mA SCAL2V – V	0.0/~0.10/0.0 0.0/~0.05/0.0	0/0.1 / 0 0/0.05 / 0	✓

§
§
§

Test Result (Pass/Fail): PASS

Enter Date/Time: mke/ps 07:06 Sign Off § TC: PA:


Enter Start Date Time:					
-------------------------------	--	--	--	--	--

7.2.3.7 Procedure SPIRE-FM-SFT-FUNC-MCU-01-P

Version	2.4
Date	4 th June 2008
Purpose	MCU (PRIME) Boot Check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Constraints	<ul style="list-style-type: none"> SPIRE DRCU PRIME is switched ON SPIRE MIB PRIME is imported in the CCS database. CCS is up and running SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	MCU voltages and board temperatures show expected 'ON' values

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-MCU-01-P.tcl	—	—	— ✓	— ✓
2	Check that the MCU is booted up successfully	MCUBITSTAT	0/1/1	0/1/1	✓

Enter Date/Time:	11/12/08	07:07	Sign Off	TC: 	PA:
-------------------------	----------	-------	-----------------	--	------------

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	Check MCU HK parameter values and ensure that the values are refreshing	MCUP5V MCUP14V MCUM14V MCUP15V MCUM15V MCUMACTEMP MCUSMECTEMP MCUBSMTEMP	~ 5.0 ± 0.2V ~ 14.0 ± 0.5V ~ -14.0 ± 0.6V ~ 15.0 ± 0.6V ~ -15.0 ± 0.7V ~300K ~300K ~300K	5.01 V 14.14 V -14.47 V 15.54 V -15.63 V 301 305 305	✓

Test Result (Pass/Fail): **PASS**

Enter Date/Time: 11/12/08 07:08 Sign Off [Signature] TC: [Signature] PA:

Enter Start Date Time:					
-------------------------------	--	--	--	--	--

7.2.3.8 Procedure: SPIRE-FM-SFT-FUNC-MCU-02-P

Version	2.2
Date	2 nd January 2007
Purpose	MCU Nominal Frame Generation Check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	Unchanged.
Constraints	<ul style="list-style-type: none"> SPIRE DRCU PRIME is switched ON SPIRE MIB PRIME is imported in the CCS database. CCS is up and running SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified MCU HK parameters show expected increment

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-MCU-02-P.tcl	MCUFRAMECNT	FM : 0/297	0/297	✓

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/11/08	07:11	Sign Off	TC:	PA:
-------------------------	----------	-------	-----------------	------------	------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.9 Procedure SPIRE-FM-SFT-FUNC-BSM-01-P

Version	2.3
Date	28 th August 2007
Purpose	BSM (PRIME) Chop/Jiggle Sensor Check.
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. BSM Chop/Jiggle sensors are ON.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MCU PRIME is booted. • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters CHOPSENSPWR and JIGGSENSPWR show expected ON values.

Procedure Steps:

07:11

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-BSM-01-P.tcl	—	—	— ✓	✓
2	Check that the Chop and Jiggle sensors have switched on	CHOPSENSPWR JIGGSENSPWR	0/1/1 0/1/1	0/1/1 0/1/1	✓

07:11

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/12/08	07:12	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

Enter Start Date/Time:			
-------------------------------	--	--	--

7.2.3.10 Procedure SPIRE-FM-SFT-BSM-OFF-P

Version	2.3
Date	28 th August 2007
Purpose	BSM (PRIME) Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. BSM Chop/Jiggle sensors are ON.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. BSM Chop/Jiggle sensors are OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MCU PRIME is booted. • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters CHOPSENSPWR and JIGGSENSPWR show expected OFF values.

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute SPIRE-FM-SFT-BSM-OFF-P.tcl	—	—	— ✓	— ✓
2	Check that the power to the BSM sensors is switched off	CHOPSENSPWR JIGGSENSPWR	1/-/0 1/-/0	1 / 0 1 / 0	✓

07:12

δ
δ

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/08	07:13	Sign Off	TC:	PA:
-------------------------	-------	-------	-----------------	------------	------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.11 Procedure SPIRE-FM-SFT-FUNC-SMEC-01-P

Version	2.3
Date	28 th August 2007
Purpose	SMEC (PRIME) Encoder/LVDT Sensor Check.
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. SMEC Encoder and LVDT are ON.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MCU PRIME is booted. • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters SMECENCPWR and SMECLVDTPWR show expected ON values.

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SMEC-01-P.tcl	—	—	— ✓	— ✓
2	Check that power to the SMEC LED and LVDT sensor is on	SMECENCPWR	0/-/1	0 / 1 ✓	✓
		SMECLVDTPWR	0/-/1	0 / 1 ✓	

Test Result (Pass/Fail):

Enter Date/Time:	11/11/08	07:14	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

Enter Start Date Time:			
-------------------------------	--	--	--

7.2.3.12 Procedure SPIRE-FM-SFT-SMEC-OFF-P

Version	2.3
Date	28 th August 2007
Purpose	SMEC (PRIME) Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. SMEC Encoder and LVDT are ON.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. SMEC Encoder and LVDT are OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MCU PRIME is booted. • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters SMECENCPWR and SMECLVDPWR show expected OFF values.

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute SPIRE-FM-SFT-SMEC-OFF-P.tcl	—	—	— ✓	— ✓
2	Check that the power to the SMEC sensors is switched off	SMECENCPWR	1/-/0	1 / 0	✓
		SMECLVDPWR	1/-/0	1 / 0	
Test Result (Pass/Fail):					

07:14

07:15

Enter Date/Time:	11/08	07:15	Sign Off	TC:	PA:
-------------------------	-------	-------	-----------------	-----	------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.13 Procedure SPIRE-FM-SFT-FUNC-DCU-01-P

Version	2.2
Date	2 nd January 2007
Purpose	DCU science packet generation check for all Photometer and Spectrometer packet types (PF, PSW, PMW, PLW, SF, SSW and SLW)
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified DCU HK parameter shows expected increment

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-01-P.tcl	DCUFRAMECNT	0/700	0/693	FAIL

07:15

Test Result (Pass/Fail):

Enter Date/Time:	11/12/08	07:15	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----


Enter Start Date Time:					
-------------------------------	--	--	--	--	--

7.2.3.14 Procedure SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P

Version	2.4
Date	10 th Sept 2007
Purpose	Photometer LIAs PRIME Check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Photometer LIAs are ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • Photometer LIAs are OFF • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • DCU PARAMETERS & SFT PARAMETERS displays are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified Photometer LIA HK parameters show expected ON values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
07.12.07 1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-04-PHOT-P.tcl	PLIABITSTAT	0/1/1	0/1/1	

Enter Date/Time:	11/11/08	07:22	Sign Off	TC: 	PA:
-------------------------	----------	-------	-----------------	---	------------

Enter Start Date|Time:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
2	Check Photometer LIA HK parameter values and ensure that the values are refreshing	PLIAP5V PLIAP9V PLIAM9V	0.0/-/ 5.2 ± 0.2V 0.0/-/ 11.5 ± 0.5V 0.0/-/ -11.5 ± 0.5V	0 78.23V / 0 11.58V / 0 -11.58V /	
3	On the DCU PARAMETERS display check that the LIA temperatures are slowly warming up. At switch-on it is possible that some of the LIA temperatures will be in soft or even hard limits. No action is required.	LIAP1TEMP to LIAP9TEMP	~ 290-300 K <i>See attached</i>	 <i>OK</i>	 <i>5</i>
4	Wait for ~3 minutes before continuing with the SFTs	—	—	—	—

Test Result (Pass/Fail): *PASS*

Enter Date/Time: *11/12/08* *07:26* Sign Off *[Signature]* IC: PA:

DS: 65535 ID: SA_5_5 Title: DCU PARAMETERS

Sample Time: 2008.346.07.26.28.046

Workstation: hpws23

NAME	DESCRIPTION	VALUE	UNIT	NAME	DESCRIPTION	VALUE	UNIT
SM10N500	OBSID	B0000000	HEX	SM01V510	SSWJFET2V	0	V
SM2LN500	BBFULLTYPE	Null		SM10V510	SLWJFET1V	0	V
SMD1N510	DCUFRAMECNT	693	DEC	SMF0V510	SPECHTRV	0	V
SMD0M510	DCUDATAMODE	SLW		SMC0K510	TC1TEMP	0	mV
SMD0N510	DCUDATAFRMS	*****		SMC1K510	TC2TEMP	0	mV
SMD2F510	DCUDATASTAT	OFF		SMC2K510	TC3TEMP	0	mV
SMP0H510	PHOTBIASDIV	00000006	HEX	SML0V510	PLIAP5V	5.23	V
SM20R510	PSWPHASE	0	deg	SML1V510	PLIAP9V	11.58	V
SM30R510	PMWPHASE	0	deg	SML2V510	PLIAM9V	-11.58	V
SM50R510	PLWPHASE	0	deg	SML3V510	SLIAP5V	0.13	V
SMC0R510	TCPHASE	00000000	HEX	SML4V510	SLIAP9V	0.015	V
SM20F510	PSWJFETSTAT	00000000	HEX	SML5V510	SLIAM9V	0.015	V
SM80F510	PMLWJFETSTAT	00000000	HEX	SML0K510	LIAP9TEMP	305.32	K
SM20V510	PSWJFET1V	0	V	SML1K510	LIAP8TEMP	306.09	K
SM21V510	PSWJFET2V	0	V	SML2K510	LIAP7TEMP	306.19	K
SM22V510	PSWJFET3V	0	V	SML3K510	LIAP6TEMP	306.61	K
SM23V510	PSWJFET4V	0	V	SML4K510	LIAP5TEMP	307.01	K
SM24V510	PSWJFET5V	0	V	SML5K510	LIAP4TEMP	307.70	K
SM25V510	PSWJFET6V	0	V	SML6K510	LIAP3TEMP	307.88	K
SM30V510	PMWJFET1V	0	V	SML7K510	LIAP2TEMP	308.43	K
SM31V510	PMWJFET2V	0	V	SML8K510	LIAP1TEMP	309.47	K
SM32V510	PMWJFET3V	0	V	SML9K510	LIAS1TEMP	304.77	K
SM33V510	PMWJFET4V	0	V	SMLAK510	LIAS2TEMP	304.17	K
SM50V510	PLWJFET1V	0	V	SMLBK510	LIAS3TEMP	303.73	K
SM51V510	PLWJFET2V	0	V	SMB0K510	BIASTEMP	306.74	K
SMP0V510	PHOTHTRV	0	V	SMD0K510	DAQTEMP	308.96	K
SMT0V510	TCJFETV	0	V	SML0F510	LIASSTAT	00000000	HEX
SMF0H510	SPECBIASDIV	00000001	HEX				
SM00R510	SSWPHASE	0	deg				
SM10R510	SLWPHASE	0	deg				
SMF0F510	SPECJFETSTAT	00000000	HEX				
SM00V510	SSWJFET1V	0	V				

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.15 Procedure SPIRE-FM-SFT-PLIA-OFF-P

Version	2.4
Date	10 th Sept 2007
Purpose	Photometer LIAs PRIME Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Photometer LIAs are ON
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Photometer LIAs are OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • Photometer LIAs are ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified Photometer LIA HK parameters show expected OFF values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-PLIA-OFF-P.tcl	PLIABITSTAT	1/-0	0 / 0	✓
2	Check Photometer LIA HK parameter values	PLIAP5V PLIAP9V PLIAM9V	5.2 ± 0.2V/-0.0 11.5 ± 0.5V/-0.0 11.5 ± 0.5V/-0.0	5.23 V / 0 11.58 V / 0 11.58 V / 0	✓

Test Result (Pass/Fail): **PASS**

Enter Date/Time:	11/10/08	07:34	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

Enter Start Date/Time:			
------------------------	--	--	--

7.2.3.16 Procedure SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P

Version	2.4
Date	10 th Sept 2007
Purpose	Spectrometer LIAs PRIME Check
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Spectrometer LIAs are ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • Spectrometer LIAs are OFF • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS & DCU PARAMETERS displays are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified Spectrometer LIA HK parameters show expected ON values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
07:35 1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-04-SPEC-P.tcl	SLIABITSTAT	0/1/1	0/1/1	✓


Enter Date/Time:	M/M/SS	07:36	Sign Off	TC:	PA:
------------------	--------	-------	----------	-----	-----

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
2	Check Spectrometer LIA HK parameter values and ensure that the values are refreshing	SLIAP5V SLIAP9V SLIAM9V	0.0/-/ 5.2 ± 0.2V 0.0/-/ 11.5 ± 0.5V 0.0/-/11.5 ± 0.5V	0 / 5.25 0 / 11.59 0 / -11.59	✓
3	On the DCU PARAMETERS display check that the LIA temperatures are slowly warming up. At switch-on it is possible that some of the LIA temperatures will be in soft or even hard limits. No action is required.	LIAS1TEMP to LIAS3TEMP	~ 290-300 K	306 305 305	✓
4	Wait for ~3 minutes before continuing with the SFTs	—	—	—	—

S.

Test Result (Pass/Fail): *PASS*

Enter Date/Time:	<i>11/12/08</i>	<i>07:40</i>	Sign Off	TC: 	PA:
------------------	-----------------	--------------	----------	---	-----


Enter Start Date Time:					
-------------------------------	--	--	--	--	--

7.2.3.17 Procedure SPIRE-FM-SFT-SLIA-OFF-P

Version	2.4
Date	10 th Sept 2007
Purpose	Spectrometer LIAs PRIME Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Spectrometer LIAs are ON
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted. Spectrometer LIAs are OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • Spectrometer LIAs are ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified Spectrometer LIA HK parameters show expected OFF values


Procedure Steps:

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-SLIA-OFF-P.tcl	SLIABITSTAT	1/-0	1/0	✓

Enter Date/Time:	11/12/08	07:42	Sign Off	TC: 	PA:
-------------------------	----------	-------	-----------------	---	------------

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
2	Check Photometer LIA HK parameter values	SLIAP5V SLIAP9V SLIAM9V	5.2 ± 0.2V/-0.0 11.5 ± 0.5V/-0.0 -11.5 ± 0.5V/-0.0	5.25 / 0 11.59 / 0 11.57 / 0	✓
Test Result (Pass/Fail): PASS					

Enter Date/Time:	11/11/08	07:43	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:			
------------------------	--	--	--

7.2.3.18 Procedure SPIRE-FM-SFT-FUNC-MCU-OFF-P

Version	2.4
Date	4 th June 2008
Purpose	MCU PRIME Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is booted.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU PRIME is OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MCU PRIME is ON. • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified MCU HK Parameter shows expected value.

Note: type 5/4 event: ALARM_LSMCU_DEAD is expected

Enter Date/Time:	11/11/08	07:44	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date|Time:

Procedure Steps:

07:44

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute SPIRE-FM-SFT -MCU-OFF-P.tcl	—	—	— ✓	— ✓
2	Check that the MCU is switched off Expected events: <ul style="list-style-type: none"> A TM(5,1) event report with Event ID 0x0521 and SID 0x510F will be received to indicate that the DPU is not receiving a response from the MCU. A TM(5,4) event report with Event ID 0x550D and SID 0x5420 will be received to indicate the MCU disconnection from the DPU. ✓ 	MCUBITSTAT	1/-0	1/0	✓
Test Result (Pass/Fail): PASS					

5

5

Enter Date/Time: 11/12/08 07:44 Sign Off [Signature] TC: [Signature] PA:

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.3.19 Procedure SPIRE-FM-SFT-FUNC-SCU-OFF-P

Version	2.4
Date	4 th June 2008
Purpose	SCU PRIME Switch OFF
Initial configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is ON.
Final configuration	SPIRE DPU and DRCU PRIME are ON and SPIRE HK is being produced and AC/DC thermometry is OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU PRIME is switched ON • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified SCU HK Parameters show expected value.

Procedure Steps:

07:46


Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT- SCU-OFF-P.tcl	—	—	— ✓	✓

§

Enter Date/Time:	11/12/08	07:46	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
2	A few seconds later record the value of parameter SCUTEMPSTAT a) EVID 1313 No_MCU_Response_Error b) EVID 21773 ALARM_LSMCU_DEAD	SCUTEMPSTAT	0xFFFF/-/0	0xFFFF/0	
3	A few seconds later record the value of parameter SUBKSTAT	SUBKSTAT	1/-/0	1/0	
Test Result (Pass/Fail): PASS					

Enter Date/Time:	11/12/08	07:47	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.4 Switch Off DRCU & DPU PRIME

07:50


Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime from DRCU ON: S102999SCVT007_ASDFSFTSPIR_PWR_OFF_P	OK	ok		✓	
2.	On HPCCS when prompted: "SPIRE Switch OFF for SFT related tests in any conditions - Select NO to abort TS if not correct"	YES	YES		✓	
3.	If in any doubt about the script being executed NO should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.		N/A		✓	
4.	If YES is selected the test script will go on to automatically power off all SPIRE warm units.		YES		✓	

Enter Date/Time:	m/n/e/sb	07:50	Sign Off	TC: 	PA:
------------------	----------	-------	----------	---	-----

Enter Start Date Time:			
------------------------	--	--	--

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	<p>During Switch OFF of SPIRE the following (5,1) and (5,4) event messages on APID 1280 are expected and do not indicate a problem:</p> <p>c) EVID 1313 No_MCU_Response_Error d) EVID 21773 ALARM_LSMCU_DEAD</p>				✓	
		<i>Not seen,</i>	<i>already during SFT</i>			
6.	<p>On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue"</p> <p>Check that parameters:</p> <p>THSK Not refreshing TM2N Not incrementing</p>			AND: SA_1_559	✓	
			<i>Not updating</i>			
7.	Select OK to continue	OK	<i>ok</i>		✓	
8.	<p>On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT007_ASDFSFTSPIR_PWR_OFF_P it will prompt: "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"</p>				✓	
			<i>ok</i>			

or.
or.
or.
or.

Enter Date/Time:	<i>11/12/88</i>	<i>07:57</i>	Sign Off	TC: 	PA:
------------------	-----------------	--------------	----------	---	-----

Enter Start Date|Time:

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
9.	Select OK to continue	OK	ok		✓	
10.	On HPCCS stop Packet History displays for the following APIDs:1280,1282	OK	ok		✓	
	SPIRE OFF					

or.

Enter Date/Time: Sign Off TC: PA:

Enter Start Date Time:			
-------------------------------	--	--	--

7.2.5 Procedure SPIRE-FM-WFT-LPU-01-P

THIS SECTION IS NOT PERFORMED FOR TBTV SFT

Version	1.0
Date	Tuesday, 28 August 2007
Purpose	DPU PRIME Switch OFF
Initial configuration	Prime and redundant DPU and DRCU are off
Final configuration	Prime and redundant DPU and DRCU are off
Constraints	<ul style="list-style-type: none"> • Cryostat is vertical to within $\pm 45^\circ$ • Prime and redundant DPU and DRCU are off
Duration	5 minutes
Pass/Fail criteria	The specified current is drawn when the LPU is enabled and is switched off when the LPU is disabled

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Power on Prime LPU LCL (LCL #25) Execute: DC25D170	LCL status	OFF/ /ON		State of LCL #25 switches to ON
2	Send HL command #5 (LPU Enable Prime) Execute: DCT01170, DHT01170 = "CMD_ID_HLC5"	LCL #25 current	0mA/ /130-180mA		Current between 130-180mA

Enter Date/Time:			Sign Off	TC:		PA:
-------------------------	--	--	-----------------	------------	--	------------

Enter Start Date/Time:			
------------------------	--	--	--

Step	Description	Parameter – Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
4	Send HL command #6 (LPU Disable Prime) Execute: DCT01170, DHT01170 = "CMD_ID_HLC6"	LCL #25 current	130-180mA/ /0mA		Current off
5	Un-power Prime LPU LCL (LCL # 25) Execute: DC25B170	LCL status	ON/ / OFF		State of LCL #25 switches to OFF
Test Result (Pass/Fail):					

Enter Date/Time:			Sign Off	TC:		PA:
------------------	--	--	----------	-----	--	-----



Enter Start Date/Time:			
------------------------	--	--	--

7.2.6 Switch On SPIRE REDUNDANT DPU & DRCU

During power on of SPIRE a number of soft/hard OOLs are reported due to the sequential switch on of the units. This is expected and will clear when SPIRE is in DRCU ON mode. When in DRCU ON mode one parameter remains OOL (soft) namely SMD2V505 (NCR3955 refers) this is also expected.

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	ONLY APPLICABLE FOR TBTV: Verify the following TCS baseplate temperature for SPIRE Warm Units before operating SPIRE: HSDCU (DEA88710)	> -30°C & < +45°C	41°C		✓	
2.	On HPCCS start Packet History displays for the following APIDs:1281,1283	OK	OK		✓	
3.	From the HPCCS test conductor console start the test script to power SPIRE Prime to DRCU ON: S102999SCVT006_ASDFSFTSPIR_PWR_ON_R				✓	
4.	On HPCCS when prompted: "SPIRE Switch ON for SFT related test in any condition - Select NO to abort TS if not correct"	YES	YES		✓	

OK
OK
OK
OK

Enter Date/Time:	11/12/08	05:20	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date/Time:



Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	If in any doubt about the script being executed NO should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.					
6.	If YES is selected the test script will go on to automatically power on all SPIRE warm units, force boot the DPU ASW and configure the instrument to DRCU ON mode.		OK, YES		✓	✓
7.	On HPCCS when prompted: "Check Telemetry Updating Correctly and OBT is Consistent with CDMU - OK to continue"	OK	OK		✓	✓
8.	If I-EGSE connected when prompted on HPCCS, perform check requested: "Check IEGSE Time Consistent - OK to continue when RAL confirm"	OK	N/A		✓	✓
9.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters:		No tr updating	AND: SA_1_559	✓	✓

Enter Date/Time: 11/12/08 08:35 Sign Off [Signature] TC: [Signature] PA: D. Lanbury

Enter Start Date Time:			
------------------------	--	--	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
		THSK TM2N	Not refreshing Not incrementing			
10.	Select OK to continue	OK	ok		✓	
11.	On HPCCS when prompted: "Check Telemetry Updating Correctly - OK to continue" Check that parameters:	THSK TM2N	Refreshing @ 1Hz Incrementing by 1 @ 1Hz	AND: SA_1_559	✓	
12.	Select OK to continue	OK	ok		✓	
13.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT006_ASDFSFTSPIR_PWR_ON_R it will prompt: "Set Bus Profile Back to Original Setting?" Select NO	NO	No		✓	

Handwritten notes on the right side of the table, including checkmarks and scribbles.

Enter Date/Time:	11/11/08	05:36	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:			
------------------------	--	--	--

Step-No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
14.	At the prompt: "Bus Profile left unchanged" Select OK to continue	OK	OK		✓	
15.	Verify HK TM packets are being received on APIDs 1281 & 1283		OK		✓	
16.	MODE parameter is set to "DRCU ON" mode (RAW value 0x0100)	SM00M500 = 0x0100 (DRCU ON)	DRCU-ON	AND: SA_1_559	✓	
17.	ONLY APPLICABLE FOR TBTV: Verify the following TCS baseplate temperature for SPIRE Warm Units before operating SPIRE: HSDCU (DEA88710)	> -15°C & < +45°C	42.26 °C		✓	
	SPIRE powered and in DRCU ON mode					

OK
OK
OK
OK

Enter Date/Time:	11/12/08	05:37	Sign Off	TC:	PA: <i>Planouby</i>
------------------	----------	-------	----------	-----	---------------------

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7 Short Functional Tests - Redundant

7.2.7.1 Procedure SPIRE-FM-SFT-FUNC-SCU-01-R



Version	2.4
Date	4 th June 2008
Purpose	SCU science packet generation check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON ✓ • SPIRE MIB REDUNDANT is imported in the CCS database. ✓/A • CCS is up and running ✓ • SFT PARAMETERS display is selected on the CCS ✓
Duration	3 minutes
Pass/Fail Criteria	Specified SCU HK parameters show expected increment.

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-01-R.tcl	SCUFRAMECNT (On SFT PARAMETERS display)	0/31	0 / 31	✓
		TM5N (On DPU & OBS PARAMETERS display)	0x3FFF/1	0x3FFF / 1	
Test Result (Pass/Fail): PASS					

05:40 ✓

8

Enter Date/Time:	11/06/08	05:41	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.2 Procedure SPIRE-FM-SFT-FUNC-SCU-03-R

Version	2.3
Date	28 th August 2007
Purpose	SCU DC thermometry check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON ✓ • SPIRE MIB REDUNDANT is imported in the CCS database. <i>U/A</i> • CCS is up and running ✓ • SFT PARAMETERS display is selected on the CCS ✓
Duration	8 minutes
Pass/Fail Criteria	DC Thermometry channels show temperature readings according to the actual instrument temperature* *: At warm temperatures all channels should show short circuit RAW readings of -32768

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-03-R.tcl	—	—	—	✓



05:42

8

Enter Date/Time:	<i>11/11/08</i>	<i>05:43</i>	Sign Off	TC:	PA: <i>D. Lemouby</i>
------------------	-----------------	--------------	----------	-----	-----------------------

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
2	Wait for the parameter BBFULLTYPE to get set to SCU_DC_Therm			✓	
3	A few seconds later record the value of parameter SCUTEMPSTAT	SCUTEMPSTAT	0/FFFF/FFFF	0/0x FFFF	✓
4	<p>If the instrument is at He II temperatures check the values of SCU DC thermometry channels.</p> <p>Notes:</p> <ul style="list-style-type: none"> The measured channel values will depend on the cryostat Level 0 and Level 1 temperatures. <p>SCALTEMP is expected to show an anomalous value. HP-112000-ASED-NC – 4289 is open. Fix will require an update to</p>	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP EMCFILTEMP SL0TEMP PL0TEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP	~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L0 K ~ L0 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K	→ See attached list	

Enter Date/Time: 14/12/08 05:47 Sign Off  TC: PA: 

Enter Start Date/Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
	the SPIRE MIB.	BSMTEMP	~ L1 K		
5	<p>If the instrument is at He I temperatures check the values of SCU DC thermometry channels.</p> <p>Notes:</p> <ul style="list-style-type: none"> • The measured channel values will depend on the cryostat Level 1 temperatures. <p>SCALTEMP is expected to show an anomalous value. HP-112000-ASED-NC – 4289 is open. Fix will require an update to the SPIRE MIB.</p>	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP EMCFILTEMP SL0TEMP PL0TEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP BSMTEMP	~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K ~ L1 K (NCR open) ~ L1 K ~ L1 K ~ L1 K	N/A	
6	<p>If the instrument is warm:</p> <p>Configure the SFT PARAMETERS display to show</p>	PUMPHTRTEMP PUMPHSTEMP EVAPHSTEMP SHUNTTEMP	— — — —	N/A	

Enter Date/Time: 11/16/08 05:42 Sign Off [Signature] TC: [Signature] PA: D. Lamonby

DS: 65535 ID: SA_7_5 Title: SFT PARAMETERS

Sample Time: 2008.346.05.45.10.764

Workstation: hpws23

NAME	DESCRIPTION	VALUE	UNIT	NAME	DESCRIPTION	VALUE	UNIT
SM10N500	OBSID	B0000000	HEX	SM_1V520	SCUP9V	9.0913	V
SM2LN500	BBFULLTYPE	Null		SM_2V520	SCUM9V	-9.1083	V
SM00M500	MODE	DRCU_ON		SMT0A520	EVHSV	-0.0699	mV
SM00T500	THSK	2008.346.05.45.10.216	HEX	SMH0A520	SPHSV	-0.0484	mV
SMT1N500	TM2N	0000030B	HEX	SMT1A520	SPHTRV	-0.000154	V
SMD1N510	DCUFRAMECNT	0		SMP0V520	PCALV	0.000349	V
SMD0N515	MCUFRAMECNT	0		SMP0A520	PCALCURR	0.000181	mA
SMD0N520	SCUFRAMECNT	31		SMS0V520	SCAL2V	3.6e-05	V
SMB6V510	BIASP5V	5.16	V	SMS0A520	SCAL2CURR	-0.000254	mA
SMB7V510	BIASP9V	9.00	V	SMS1V520	SCAL4V	6.8e-05	V
SMB8V510	BIASM9V	-9.07	V	SMS1A520	SCAL4CURR	9.1e-05	mA
SML0V510	PLIAP5V	0.02	V	SMK0F520	SUBKSTAT	00000000	HEX
SML1V510	PLIAP9V	0.0087	V	SMF0K520	PUMPHTRTEMP	1.87132367	K
SML2V510	PLIAM9V	0.0087	V	SMF1K520	PUMPHSTEMP	2.06350921	K
SML3V510	SLIAP5V	0.012	V	SMF2K520	EVAPHSTEMP	2.02253554	K
SML4V510	SLIAP9V	0.0087	V	SMF3K520	SHUNTTEMP	1.78463195	K
SML5V510	SLIAM9V	0.0096	V	SMF4K520	EMCFILTEMP	2.52932882	K
SM_4V515	MCUP5V	20.00	V	SMF5K520	SL0TEMP	1.78808078	K
SM_2V515	MCUP14V	75.36	V	SMF6K520	PL0TEMP	1.79027024	K
SM_3V515	MCUM14V	75.36	V	SMF7K520	OPTTEMP	2.55025656	K
SM_0V515	MCUP15V	75.36	V	SMF8K520	BAFTEMP	2.57049947	K
SM_1V515	MCUM15V	75.36	V	SMF9K520	BSMIFTEMP	2.53326333	K
SMM0K515	MCUMACTEMP	1651.51	K	SMS0K520	SCAL2TEMP	0 ?	K
SMF0K515	MCUSMECTEMP	1651.51	K	SMS1K520	SCAL4TEMP	0 ?	K
SMB0K515	MCUBSMTEMP	1651.51	K	SMS2K520	SCALTEMP	2.50050000	K
SMS0W515	SMECENCPOWER	0000FFFF	HEX	SMFAK520	SMECIFTEMP	2.51379181	K
SMS1W515	SMECLVDTPWR	0000FFFF	HEX	SMFBK520	SMECTEMP	0 ?	K
SMS1M515	SMECLOOPMODE	0000FFFF	HEX	SMFCK520	BSMTEMP	2.51970983	K
SMC0W515	CHOPSENSPOWER	0000FFFF	HEX	SMK0K520	SUBKTEMP	55.15210000	K
SMJ0W515	JIGGSENSPOWER	0000FFFF	HEX	SM_0X520	PLIABITSTAT	00000000	HEX
SM_1F520	SCUTEMPSTAT	0000FFFF	HEX	SM_1X520	SLIABITSTAT	00000000	HEX
SM_0V520	SCUP5V	5.2293	V	SM_2X520	MCUBITSTAT	00000000	HEX

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
	<p>the RAW values of SCU DC thermometry channels.</p> <p>Record the RAW values of SCU DC thermometry channels. Nominal values should show a short circuit status (or RAW - 32768).</p> <p>Non Nominal (Open Circuit Criterion): RAW reading in the range [0, - 100]</p>	EMCFILTEMP SL0TEMP PL0TEMP OPTTEMP BAFTEMP BSMIFTEMP SCAL2TEMP SCAL4TEMP SCALTEMP SMECIFTEMP SMECTEMP BSMTEMP	— — — — — — — — — — — — —		
<p>Test Result (Pass/Fail): PASS</p>					

Enter Date/Time: 11/16/08 05:48 Sign Off [Signature] TC: [Signature] PA: D. Lamonty

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.3 Procedure SPIRE-FM-SFT-FUNC-SCU-06-R



Version	2.3
Date	28 th August 2007
Purpose	SCU AC thermometry check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and DC thermometry is ON
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail Criteria	AC Thermometry channel shows temperature readings according to the actual instrument temperature

Procedure Steps:

05:49

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-06-R.tcl	—	—	— ✓	—
2	Wait for the parameter BBFULLTYPE to get set to SCU_AC_Therm			✓	

δ
δ

Enter Date/Time:	11/12/08	05:50	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date/Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	A few seconds later record the value of parameter SUBKSTAT	SUBKSTAT	0/1/1	0/1/1	✓
4	If the instrument is at He II temperatures check the value of SCU AC thermometry channel. Note that the measured channel value will depend on the cryostat Level 0 temperature.	SUBKTEMP	~L0 K	1.84 K	✓
5	If the instrument is at He I temperatures check the value of SCU AC thermometry channel. Note that the measured channel value will depend on the cryostat Level 1 temperature.	SUBKTEMP	~L1 K	N/A	✓

✓
 ✓
 ✓



Enter Date/Time: 11/12/08 05:51 Sign Off [Signature] TC: [Signature] PA: [Signature]

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
6	<p>If the instrument is warm:</p> <p>Configure the SFT PARAMETERS display to show the RAW value of SCU AC thermometry channel.</p> <p>Only record the RAW value of SCU AC thermometry channel if it indicates an open circuit.</p> <p>Open Circuit Criterion: RAW reading in the range [0, -100]</p>	SUBKTEMP	—	N/A	✓
<p>Test Result (Pass/Fail): PASS</p>					

7.2.7.4 Procedure SPIRE-FM-SFT-FUNC-SCU-07-R

Version	2.2
Date	2 nd January 2007
Purpose	Sorption Cooler Heater Check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and DC thermometry is ON

Enter Date/Time: 11/16/08 05:52 Sign Off  TC: PA: 

Enter Start Date Time:			
------------------------	--	--	--

Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail Criteria	Sorption cooler heat switches and pump heater show expected voltages

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-07-R.tcl	—	—	— ✓	— ✓
2	Wait for the parameter BBFULLTYPE to get set to Cooler_Htr_Che	BBFULLTYPE	Cooler_Htr_Che	✓	✓
3	Record the value of parameter SPSV – the Sorption Pump Heat Switch Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	SPSV - mV	0/~323/0	-0.02 / 324/0	✓

05:53

δ
δ
δ

Enter Date/Time:	11/12/08	05:54	Sign Off	TC:	PA: D. Lamonty
------------------	----------	-------	----------	-----	----------------

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
4	Record the value of parameter EVHSV – the Evaporator Heat Switch Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	EVHSV - mV	0/~323/0	-0.04 / 325/0	✓
5	Record the value of parameter SPHTRV – the Sorption Pump Heater Voltage. <i>This voltage stays on for ~20 seconds. Wait for the voltage to go to zero to continue.</i>	SPHTRV - V	0/~8.8/0	0.0017 / 8.85/0	✓
Test Result (Pass/Fail): PASS					

§
§

Enter Date/Time: 11/12/08 05:54 Sign Off [Signature] TC: [Signature] PA: D. Lamanby

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.5 Procedure SPIRE-FM-SFT-FUNC-SCU-04-R

Version	2.3
Date	28 th August 2007
Purpose	Photometer Calibration Check (REDUNDANT)
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail Criteria	PCAL voltage and current agree with expected values

Procedure Steps:

Step	Description	Parameter Name - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-04-R.tcl The expected values during the test should be monitored when parameter BBFULLTYPE in the SFT PARAMETERS display is set to PCAL_Check This usually happens about 30 seconds from the start of test execution.	PCALCURR - mA PCALV - V BBFULLTYPE	0.0/0.1/0.0 0.0/~0.02/0.0 PCAL_Check	0.00 / 0.110 0.00 / 0.019 / 0 PCAL_Check	✓
Test Result (Pass/Fail): PASS					

05:55

§

Enter Date/Time:	12/12/08	05:56	Sign Off	TC:	PA: D. Lamonby
------------------	----------	-------	----------	-----	----------------

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.6 Procedure SPIRE-FM-SFT-FUNC-SCU-05-R

Version	2.2
Date	2 nd January 2007
Purpose	Spectrometer Calibration Check (REDUNDANT)
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	SCAL2 and SCAL4 voltage and currents agree with expected values

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SCU-05-R.tcl	—	—	— ✓	✓
2	Wait for the parameter BBFULLTYPE to get set to SCAL4_Check	BBFULLTYPE	SCAL4_Check	SCAL4_Check ✓	✓

05:57

§

§

Enter Date/Time:	m/21/08	05:58	Sign Off	TC:	PA:
------------------	---------	-------	----------	-----	-----

Enter Start Date Time:					
------------------------	--	--	--	--	--



Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	A few seconds later record the value of parameters SCAL4CURR and SCAL4V <i>These parameters are set back to 0 after ~30 seconds</i>	SCAL4CURR – mA SCAL4V – V	0.0/~0.10/0.0 0.0/~0.05/0.0	0 / 0.1 / 0 / 0.05 /	✓
4	Wait for the parameter BBFULLTYPE to get set to SCAL2_Check	BBFULLTYPE	SCAL2_Check	SCAL2_Check	✓
5	A few seconds later record the values of parameters SCAL2CURR and SCAL2V <i>These parameters are set back to 0 after ~30 seconds</i>	SCAL2CURR – mA SCAL2V – V	0.0/~0.10/0.0 0.0/~0.05/0.0	0 / 0.1 / 0 0 / 0.05 / 0	✓

}

}

}

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/12/08	05:58	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.7 Procedure SPIRE-FM-SFT-FUNC-MCU-01-R

Version	2.4
Date	4 th June 2008
Purpose	MCU (REDUNDANT) Boot Check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	MCU voltages and board temperatures show expected 'ON' values

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-MCU-01-R.tcl	—	—	— ✓	— ✓
2	Check that the MCU is booted up successfully	MCUBITSTAT	0/1/1	0/1/1	✓

06:00



§
§

Enter Date/Time:	11/11/08	06:08	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
3	Check MCU HK parameter values and ensure that the values are refreshing	MCUP5V MCUP14V MCUM14V MCUP15V MCUM15V MCUMACTEMP MCUSMECTEMP MCUBSMTEMP	~ 5.0 ± 0.2V ~ 14.0 ± 0.5V ~ -14.0 ± 0.6V ~ 15.0 ± 0.6V ~ -15.0 ± 0.7V ~300K ~300K ~300K	5.00 v 14.13 v -14.5 v 15.5 v -15.6 v 303K 307K 306K	✓
Test Result (Pass/Fail): PASS					

5

Enter Date/Time:	11/12/08	06:02	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.8 Procedure: SPIRE-FM-SFT-FUNC-MCU-02-R

Version	2.2
Date	2 nd January 2007
Purpose	MCU Nominal Frame Generation Check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	Unchanged.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified MCU HK parameters show expected increment

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-MCU-02-R.tcl	MCUFRAMECNT	FM : 0/297	- 0/297	- ✓

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/12/08	06:24	Sign Off	TC:	PA: D. Lamonby
------------------	----------	-------	----------	-----	----------------

Enter Start Date Time:			
-------------------------------	--	--	--

7.2.7.9 Procedure SPIRE-FM-SFT-FUNC-BSM-01-R

Version	2.3
Date	28 th August 2007
Purpose	BSM (REDUNDANT) Chop/Jiggle Sensor Check.
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. BSM Chop/Jiggle sensors are ON.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MCU REDUNDANT is booted. • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters CHOPSENSPWR and JIGGSENSPWR show expected ON values.

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-BSM-01-R.tcl	—	—	—	—
2	Check that the Chop and Jiggle sensors have switched on	CHOPSENSPWR JIGGSENSPWR	0/1/1 0/1/1	0/1/1/1 0/1/1/1	✓

06:06

5

Test Result (Pass/Fail):

Enter Date/Time:	11/12/08	06:06	Sign Off	TC:	PA: <i>D. Lamby</i>
-------------------------	----------	-------	-----------------	------------	----------------------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.10 Procedure SPIRE-FM-SFT-BSM-OFF-R

Version	2.3
Date	28 th August 2007
Purpose	BSM (REDUNDANT) Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. BSM Chop/Jiggle sensors are ON.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. BSM Chop/Jiggle sensors are OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MCU REDUNDANT is booted. • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters CHOPSENSPWR and JIGGSENSPWR show expected OFF values.

Procedure Steps:

06:06

Step	Description	Parameter – Unit	Expected Values Before/ During/ After	Actual Values Before/ During/ After	Success/ Failure
1	Execute SPIRE-FM-SFT-BSM-OFF-R.tcl	—	—	— ✓	✓
2	Check that the power to the BSM sensors is switched off	CHOPSENSPWR JIGGSENSPWR	1/-/0 1/-/0	1/0 1/0	✓

8
8

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/11/08	06:07	Sign Off	TC:	PA: D. Lamouby
------------------	----------	-------	----------	-----	----------------

Enter Start Date Time:					
-------------------------------	--	--	--	--	--

7.2.7.11 Procedure SPIRE-FM-SFT-FUNC-SMEC-01-R



Version	2.3
Date	28 th August 2007
Purpose	SMEC (REDUNDANT) Encoder/LVDT Sensor Check.
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. SMEC Encoder and LVDT are ON.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MCU REDUNDANT is booted. • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters SMECENCPWR and SMECLVDT PWR show expected ON values.

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-SMEC-01-R.tcl	—	—	— ✓	✓
2	Check that power to the SMEC LED and LVDT sensor is on	SMECENCPWR	0/-1	0 / 1	✓
		SMECLVDT PWR	0/-1	0 / 1	
Test Result (Pass/Fail): PASS					

06:09

δ
δ

Enter Date/Time:	11/12/08	06:09	Sign Off	TC: 	PA: 
-------------------------	----------	-------	-----------------	--	--

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.12 Procedure SPIRE-FM-SFT-SMEC-OFF-R

Version	2.3
Date	28 th August 2007
Purpose	SMEC (REDUNDANT) Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. SMEC Encoder and LVDT are ON.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. SMEC Encoder and LVDT are OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MCU REDUNDANT is booted. • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	3 minutes
Pass/Fail criteria	HK Parameters SMECENCPWR and SMECLVDTPWR show expected OFF values.

Procedure Steps:

06:10

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute SPIRE-FM-SFT-SMEC-OFF-R.tcl	—	—	— ✓	— ✓
2	Check that the power to the SMEC sensors is switched off	SMECENCPWR	1/-/0	1/0	✓
		SMECLVDTPWR	1/-/0	1/0	

06:08

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/12/08	06:11	Sign Off	TC: [Signature]	PA: D. Lamoury
------------------	----------	-------	----------	-----------------	----------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.13 Procedure SPIRE-FM-SFT-FUNC-DCU-01-R

Version	2.2
Date	2 nd January 2007
Purpose	DCU science packet generation check for all Photometer and Spectrometer packet types (PF, PSW, PMW, PLW, SF, SSW and SLW)
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	Unchanged
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified DCU HK parameter shows expected increment

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-01-R.tcl	DCUFRAMECNT	0/700	0/700	✓

06:13

5

Test Result (Pass/Fail): PASS

Enter Date/Time:	11/12/08	06:13	Sign Off	TC:	PA: D. Lamoury
------------------	----------	-------	----------	-----	----------------

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.14 Procedure SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R

Version	2.4
Date	10 th Sept 2007
Purpose	Photometer LIAs REDUNDANT Check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Photometer LIAs are ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • Photometer LIAs are OFF • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS & DCU PARAMETERS displays are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified Photometer LIA HK parameters show expected ON values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-04-PHOT-R.tcl	PLIABITSTAT	0/1/1	0/1/1	✓

06:15

8

Enter Date/Time:	11/12/08	06:16	Sign Off	TC:	PA:
------------------	----------	-------	----------	-----	-----

DS: 65535 ID: SA_5_5 Title: DCU PARAMETERS

Sample Time: 2008.346.06.16.44.802

Workstation: hpws23

NAME	DESCRIPTION	VALUE	UNIT	NAME	DESCRIPTION	VALUE	UNIT
SM10N500	OBSID	B0000000	HEX	SM01V510	SSWJFET2V	0	V
SM2LN500	BBFULLTYPE	Null		SM10V510	SLWJFET1V	0	V
SMD1N510	DCUFRAMECNT	700	DEC	SMF0V510	SPECHTRV	0	V
SMD0M510	DCUDATAMODE	SLW		SMC0K510	TC1TEMP	0	mV
SMD0N510	DCUDATAFRMS	*****		SMC1K510	TC2TEMP	0	mV
SMD2F510	DCUDATASTAT	OFF		SMC2K510	TC3TEMP	0	mV
SMP0H510	PHOTBIASDIV	00000006	HEX	SML0V510	PLIAP5V	5.24	V
SM20R510	PSWPHASE	0	deg	SML1V510	PLIAP9V	11.60	V
SM30R510	PMWPHASE	0	deg	SML2V510	PLIAM9V	-11.59	V
SM50R510	PLWPHASE	0	deg	SML3V510	SLIAP5V	0.012	V
SMC0R510	TCPHASE	00000000	HEX	SML4V510	SLIAP9V	0.0087	V
SM20F510	PSWJFETSTAT	00000000	HEX	SML5V510	SLIAM9V	0.0087	V
SM80F510	PMLWJFETSTAT	00000000	HEX	SML0K510	LIAP9TEMP	304.23	K
SM20V510	PSWJFET1V	0	V	SML1K510	LIAP8TEMP	304.16	K
SM21V510	PSWJFET2V	0	V	SML2K510	LIAP7TEMP	304.48	K
SM22V510	PSWJFET3V	0	V	SML3K510	LIAP6TEMP	305.10	K
SM23V510	PSWJFET4V	0	V	SML4K510	LIAP5TEMP	305.30	K
SM24V510	PSWJFET5V	0	V	SML5K510	LIAP4TEMP	305.88	K
SM25V510	PSWJFET6V	0	V	SML6K510	LIAP3TEMP	306.43	K
SM30V510	PMWJFET1V	0	V	SML7K510	LIAP2TEMP	307.25	K
SM31V510	PMWJFET2V	0	V	SML8K510	LIAP1TEMP	307.71	K
SM32V510	PMWJFET3V	0	V	SML9K510	LIAS1TEMP	303.59	K
SM33V510	PMWJFET4V	0	V	SMLAK510	LIAS2TEMP	303.90	K
SM50V510	PLWJFET1V	0	V	SMLBK510	LIAS3TEMP	304.42	K
SM51V510	PLWJFET2V	0	V	SMB0K510	BIASTEMP	306.29	K
SMP0V510	PHOTHTRV	0	V	SMD0K510	DAQTEMP	309.02	K
SMT0V510	TCJFETV	0	V	SML0F510	LIASSTAT	00000000	HEX
SMF0H510	SPECBIASDIV	00000001	HEX				
SM00R510	SSWPHASE	0	deg				
SM10R510	SLWPHASE	0	deg				
SMF0F510	SPECJFETSTAT	00000000	HEX				
SM00V510	SSWJFET1V	0	V				



Enter Start Date|Time:

Step	Description	Parameter	Expected Values Before/ After	Actual Values Before /After	Success/ Failure
2	Check Photometer LIA HK parameter values and ensure that the values are refreshing	PLIAP5V PLIAP9V PLIAM9V	0.0- / 5.2 ± 0.2V 0.0- / 11.5 ± 0.5V 0.0- / -11.5 ± 0.5V	0 / 5.16 ✓ 0 / 11.6 ✓ 0 / -11.6 ✓	✓
3	On the DCU PARAMETERS display check that the LIA temperatures are slowly warming up. At switch-on it is possible that some of the LIA temperatures will be in soft or even hard limits. No action is required.	LIAP1TEMP to LIAP9TEMP	~ 290-300 K <i>See attached list</i>		✓
4	Wait for ~3 minutes before continuing with the SFTs	—	—	—	—

δ
δ

Test Result (Pass/Fail): *PASS*

Enter Date/Time: 11/12/08 06:17 Sign Off TC: *[Signature]* PA: D. Lamoury

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.15 Procedure SPIRE-FM-SFT-PLIA-OFF-R

Version	2.4
Date	10 th Sept 2007
Purpose	Photometer LIAs REDUNDANT Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Photometer LIAs are ON
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Photometer LIAs are OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • Photometer LIAs are ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified Photometer LIA HK parameters show expected OFF values

Procedure Steps:

06:20

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-PLIA-OFF-R.tcl	PLIABITSTAT	1/-0	1/0	✓
2	Check Photometer LIA HK parameter values	PLIAP5V PLIAP9V PLIAM9V	5.2 ± 0.2V/-0.0 11.5 ± 0.5V/-0.0 -11.5 ± 0.5V/-0.0	5.16 / 0 11.6 / 0 -11.59 / 0	✓
Test Result (Pass/Fail): PASS					

§
§

Enter Date/Time:	11/11/08	06:21	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.7.16 Procedure SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R


Version	2.4
Date	10 th Sept 2007
Purpose	Spectrometer LIAs REDUNDANT Check
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Spectrometer LIAs are ON
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • Spectrometer LIAs are OFF • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS & DCU PARAMETERS displays are selected on the CCS
Duration	5 minutes
Pass/Fail criteria	Specified Spectrometer LIA HK parameters show expected ON values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-FUNC-DCU-04-SPEC-R.tcl	SLIABITSTAT	0/1/1	0/1/1	✓



06:22

2

Enter Date/Time:	11/12/08	06:22	Sign Off	TC: 	PA: D. Lamourby
------------------	----------	-------	----------	---	-----------------

Enter Start Date/Time:			
------------------------	--	--	--

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
2	Check Spectrometer LIA HK parameter values and ensure that the values are refreshing	SLIAP5V SLIAP9V SLIAM9V	0.0/-/ 5.2 ± 0.2V 0.0/-/ 11.5 ± 0.5V 0.0/-/ -11.5 ± 0.5V	0/5.25V 0/11.59V 0/-11.58V	✓
3	On the DCU PARAMETERS display check that the LIA temperatures are slowly warming up. At switch-on it is possible that some of the LIA temperatures will be in soft or even hard limits. No action is required.	LIAS1TEMP to LIAS3TEMP	~ 290-300 K	303 K 304 K 304 K	✓
4	Wait for ~3 minutes before continuing with the SFTs	—	—	—	—
Test Result (Pass/Fail): PASS					

Enter Date/Time:	11/12/08	06:23	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date/Time:			
------------------------	--	--	--

7.2.7.17 Procedure SPIRE-FM-SFT-SLIA-OFF-R

Version	2.4
Date	10 th Sept 2007
Purpose	Spectrometer LIAs REDUNDANT Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Spectrometer LIAs are ON
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted. Spectrometer LIAs are OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • Spectrometer LIAs are ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified Spectrometer LIA HK parameters show expected OFF values

Procedure Steps:

Step	Description	Parameter	Expected Values Before/After	Actual Values Before/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT-SLIA-OFF-R.tcl	SLIABITSTAT	1/-0	1/0	✓
2	Check Photometer LIA HK parameter values	SLIAP5V SLIAP9V SLIAM9V	5.2 ± 0.2V/-0.0 11.5 ± 0.5V/-0.0 -11.5 ± 0.5V/-0.0	5.25V / 0 11.59V / 0 -11.58V / 0	✓
Test Result (Pass/Fail): PASS					

06:25

8
5

Enter Date/Time:	11/08/08	06:25	Sign Off	TC:	PA: D. Lamonty
------------------	----------	-------	----------	-----	----------------

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.18 Procedure SPIRE-FM-SFT-FUNC-MCU-OFF-R

Version	2.4
Date	4 th June 2008
Purpose	MCU REDUNDANT Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is booted.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON and MCU REDUNDANT is OFF.
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MCU REDUNDANT is ON. • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified MCU HK Parameter shows expected value.

Enter Date/Time:	11/11/08	06:25	Sign Off	TC:	PA: D. Lamont
------------------	----------	-------	----------	-----	---------------

Enter Start Date/Time:

Procedure Steps:

06:26

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute SPIRE-FM-SFT- MCU-OFF-R.tcl	—	—	— ✓	— ✓
2	Check that the MCU is switched off Expected events: <ul style="list-style-type: none"> A TM(5,1) event report with Event ID 0x0521 and SID 0x510F will be received to indicate that the DPU is not receiving a response from the MCU. A TM(5,4) event report with Event ID 0x550D and SID 0x5420 will be received to indicate the MCU disconnection from the DPU. ✓ 	MCUBITSTAT	1/-0	1 / 0	✓
Test Result (Pass/Fail): PASS					

06:27

Enter Date/Time: 11/12/08 06:27 Sign Off [Signature] TC: [Signature] PA: [Signature]

Enter Start Date Time:			
------------------------	--	--	--

7.2.7.19 Procedure SPIRE-FM-SFT-FUNC-SCU-OFF-R

Version	2.4
Date	4 th June 2008
Purpose	SCU REDUNDANT Switch OFF
Initial configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is ON.
Final configuration	SPIRE DPU and DRCU REDUNDANT are ON and SPIRE HK is being produced and AC/DC thermometry is OFF
Constraints	<ul style="list-style-type: none"> • SPIRE DRCU REDUNDANT is switched ON • SPIRE MIB REDUNDANT is imported in the CCS database. • CCS is up and running • SFT PARAMETERS display is selected on the CCS
Duration	2 minutes
Pass/Fail criteria	Specified SCU HK Parameters show expected value.

Procedure Steps:

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/Failure
1	Execute TCL script SPIRE-FM-SFT- SCU-OFF-R.tcl	—	—	—	—

Enter Date/Time:	11/12/08	06:28	Sign Off	TC:	PA: D. Lanouky
------------------	----------	-------	----------	-----	----------------

Enter Start Date|Time:

Step	Description	Parameter - Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
2	A few seconds later record the value of parameter SCUTEMPSTAT a) EVID 1313 No_MCU_Response_Error b) EVID 21773 ALARM_LSMCU_DEAD	SCUTEMPSTAT	0xFFFF/-/0	0xFFFF / 0	✓
3	A few seconds later record the value of parameter SUBKSTAT	SUBKSTAT	1/-/0	1 / 0	✓
Test Result (Pass/Fail): <i>PASS</i>					

δ
δ



Enter Date/Time: **Sign Off** **TC:** **PA:**

Enter Start Date Time:			
------------------------	--	--	--

7.2.8 Switch Off DRCU & DPU REDUNDANT



06:30

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
1.	From the HPCCS test conductor console start the test script to power OFF SPIRE Prime from DRCU ON: S102999SCVT008_ASDFSFTSPIR_PWR_OFF_R	OK	OK		✓	δ
2.	On HPCCS when prompted: "SPIRE Switch OFF for SFT related tests in any conditions - Select NO to abort TS if not correct"	YES	YES		✓	δ
3.	If in any doubt about the script being executed NO should be selected to abort the script. Before restarting consult the relevant instrument support engineer to confirm the correct script to be used for the test in question.		N/A			
4.	If YES is selected the test script will go on to automatically power off all SPIRE warm units.		OK		✓	δ

Enter Date/Time:	11/16/08	06:31	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date|Time: _____

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
5.	During Switch OFF of SPIRE the following (5,1) and (5,4) event messages on APID 1280 are expected and do not indicate a problem: c) EVID 1313 No_MCU_Response_Error d) EVID 21773 ALARM_LSMCU_DEAD				✓	✓
6.	On HPCCS when prompted: "Check Telemetry No Longer Updating - OK to continue" Check that parameters: THSK Not refreshing TM2N Not incrementing		Not updating ✓	AND: SA_1_559	✓	✓
7.	Select OK to continue	OK	ok		✓	✓
8.	On HPCCS when all autonomous actions have been completed by the power on script S102999SCVT008_ASDFSFTSPIR_PWR_OFF_R it will prompt: "Bus profile left as SPIRE PRIME, change manually after if required - OK to continue"		ok		✓	✓

Enter Date/Time: 11/12/08 06:36 Sign Off TC:  PA:  Page 105

Enter Start Date Time:				
------------------------	--	--	--	--

Step- No.	Test-Step-Description	Nominal Value	Actual Value	Remarks	P	N
9.	Select OK to continue	OK	ok		✓	
10.	On HPCCS stop Packet History displays for the following APIDs: 1281, 1283	OK	ok		✓	
	SPIRE OFF					

8
8

Enter Date/Time:	11/16/08	06:36	Sign Off	TC: 	PA: 
------------------	----------	-------	----------	---	---

Enter Start Date Time:				
------------------------	--	--	--	--

7.2.9 Procedure SPIRE-FM-SFT-LPU-01-R

THIS SECTION IS NOT PERFORMED FOR TBTV SFT

Version	1.0
Date	Tuesday, 28 August 2007
Purpose	DPU PRIME Switch OFF
Initial configuration	Prime and redundant DPU and DRCU are off
Final configuration	Prime and redundant DPU and DRCU are off
Constraints	<ul style="list-style-type: none"> • Cryostat is vertical to within $\pm 45^\circ$ • Prime and redundant DPU and DRCU are off
Duration	5 minutes
Pass/Fail criteria	The specified current is drawn when the LPU is enabled and is switched off when the LPU is disabled

Procedure Steps:

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
1	Power on Redundant LPU LCL (LCL #26) Execute DC26D170	LCL status	OFF/ /ON		State of LCL #26 switches to ON
3	Send HL command #21 (LPU Enable Redundant) Execute: DCT01170, DHT01170 = "CMD_ID_HLC21"	LCL #26 current	0mA/ /130-180mA		Current between 130-180mA
4	Send HL command #22 (LPU Disable Redundant) Execute: DCT01170, DHT01170 = "CMD_ID_HLC22"	LCL #26 current	130-180mA/ /0mA		Current off

Enter Date/Time:			Sign Off	TC:		PA:	
------------------	--	--	----------	-----	--	-----	--

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter – Unit	Expected Values Before/During/After	Actual Values Before/During/After	Success/ Failure
5	Un-power Prime LPU LCL (LCL # 25) Execute: DC26B170	LCL status	ON/ / OFF		State of LCL #26 switches to OFF
Test Result (Pass/Fail):					

7.2.10 Satellite & EGSE Switch Off

The following test steps are not applicable for TBTV tests.

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remark	P	N
Satellite & EGSE Switch Off							
	Initial Conditions: Nominal & Redundant SPIRE warm units OFF						
1	From HPCSS Test Conductor console issue command to disconnect from SPIRE I-EGSE disconnect HSPIREEGSE	OK			Steps 10.1-10.3 are only necessary if Steps 1.1, 1.3 to 1.7 were executed		
2	Confirm from HPCSS and SPIRE I-EGSE that the disconnection was successful	YZS2994 = disconnected					
3	If required Switch OFF I-EGSE i.a.w. AD 8						
4	Switch OFF Satellite/SVM, HPCSS and SCOE's i.a.w. procedure AD 2 Sections 7.7 to 7.11	OK					
5	Confirm both Satellite and EGSE powered down	OK					

Enter Date/Time:			Sign Off	TC:		PA:	
------------------	--	--	-----------------	-----	--	-----	--

Enter Start Date Time:				
------------------------	--	--	--	--

Step- No.	Test-Step-Description	Nominal Value	Tolerance	Actual Value	Remark	P	N
	End Conditions: Satellite and EGSE OFF						
	END OF TEST						

Enter Date/Time:			Sign Off	TC:		PA:	
------------------	--	--	----------	-----	--	-----	--

Enter Start Date Time:			
------------------------	--	--	--

7.2.11 SPIRE SAFE Switch Off

The following procedure describes the necessary steps to safely switch off SPIRE when directed by RAL personnel if an anomaly should occur.

Not applicable for TBTV

Version	2.3
Date	10 th Sept. 2007
Purpose	To switch OFF the SPIRE instrument if an anomaly should occur
Initial configuration	SPIRE can be in ANY configuration - Prime or Redundant - as specified in the procedure steps
Final configuration	SPIRE is OFF
Preconditions	<ul style="list-style-type: none"> • SPIRE FM DPU is electrically integrated with the Herschel Satellite • SPIRE MIB PRIME is imported in the CCS database. • CCS is up and running • FUNCTIONAL TEST PARAMETERS display is selected on the CCS
Duration	~5-8 minutes
Pass/Fail Criteria	SPIRE is OFF. All instrument subsystems are completely powered OFF.

Note:

All HK parameters relevant to this procedure can be located on the FUNCTIONAL TEST PARAMETERS CCS display. The exact name of the script to be executed at each step depends on whether the Prime or Redundant instrument is switched on.

Enter Date/Time:			Sign Off	TC:		PA:
------------------	--	--	----------	-----	--	-----

Enter Start Date Time:			
-------------------------------	--	--	--

Procedure Steps:

Step	Description	Parameter - Unit	Value	Actual value before/ after
1	<p>Check to see if the Photometer LIAs are on</p> <p>If PLIABITSTAT=1 then execute SPIRE-FM-SFT-PLIA-OFF-<P/R>.tcl</p>	PLIABITSTAT	0 or 1	
2	<p>Check to see if the Spectrometer LIAs are on</p> <p>If SLIABITSTAT=1 then execute SPIRE-FM-SFT-SLIA-OFF-<P/R>.tcl</p>	SLIABITSTAT	0 or 1	
3	<p>Check to see if the BSM is on</p> <p>If CHOPSENSPWR=1 or JIGGSENSPWR=1, then execute SPIRE-FM-SFT-BSM-OFF-<P/R>.tcl</p>	CHOPSENSPWR JIGGSENSPWR	0 or 1 0 or 1	
4	<p>Check to see if the SMEC is on</p> <p>If SMECENCPWR=1 or SMECLVDTPWR=1, then execute SPIRE-FM-SFT-SMEC-OFF-<P/R>.tcl</p>	SMECENCPWR SMECLVDTPWR	0 or 1 0 or 1	
5	<p>Check to see if the MCU is on</p> <p>If MCUBITSTAT=1 then execute SPIRE-FM-SFT-MCU-OFF-<P/R>.tcl</p>	MCUBITSTAT	0 or 1	

Enter Date/Time:			Sign Off	TC:	PA:
-------------------------	--	--	-----------------	------------	------------

Enter Start Date Time:			
------------------------	--	--	--

Step	Description	Parameter - Unit	Value	Actual value before/ after
6	<p>Check to see if the SCU DC/AC thermometry is on</p> <p>If SUBKSTAT=1 or SCUTEMPSTAT≠0, then execute SPIRE-FM-SFT-SCU-OFF-<P/R>.tcl</p>	<p>SUBKSTAT</p> <p>SCUTEMPSTAT</p>	<p>0 or 1</p> <p>≠ 0</p>	
7	If SPIRE PRIME powered execute Section 7.2.4	OK		
8	If SPIRE REDUNDANT powered execute Section 7.2.8	OK		

Enter Date/Time:			Sign Off	TC:		PA:
------------------	--	--	----------	-----	--	-----

8 Summary Sheets

8.1 Procedure Variation Summary

	Test Change	Curr. No.:	
		Date	of
Test designation	Test Procedure	Page	Rev.
Test step changed	Reason for Change		
Prepared by:	Resp. Test Leader	Project Engineer	
PA/QA	Prime	Customer	


Table 8.1-1: Procedure Variation Sheet

8.2 Non Conformance Report (NCR) Summary

NCR - No.	NCR - Title	Date	Open Closed	PA sig.

Table 8.2-1: Non-Conformance Record Sheet

8.3 Sign-off Sheet

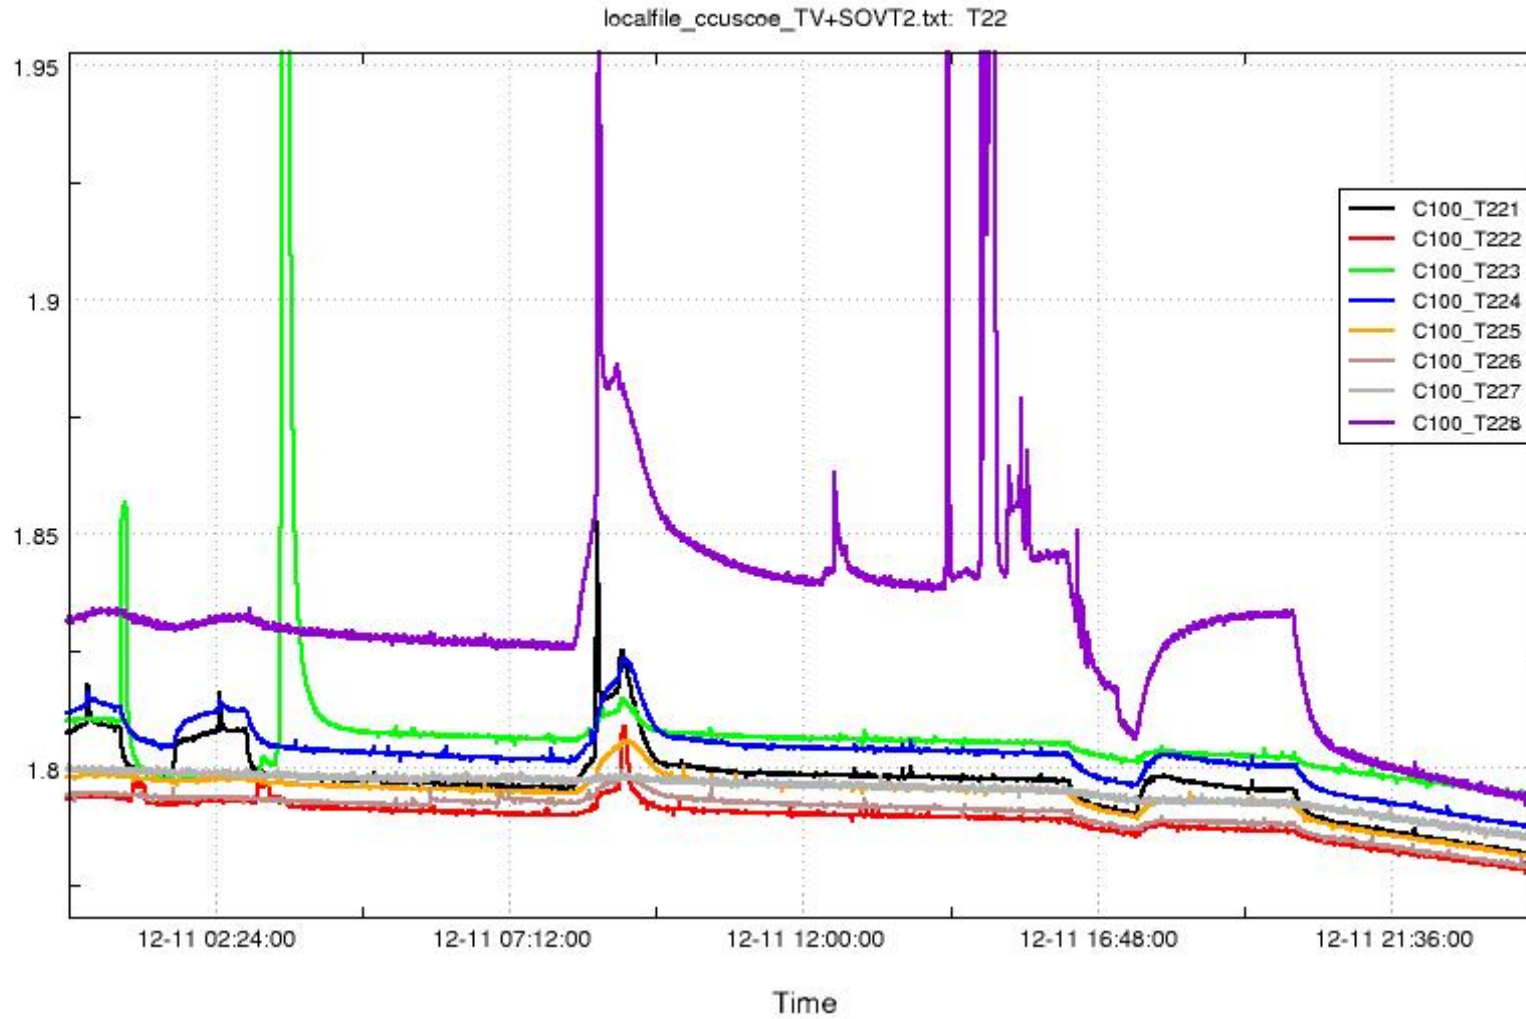
	Date	Signature
Test Manager		
Operator	11/12/08	
PA Responsible		
ESA Representative		



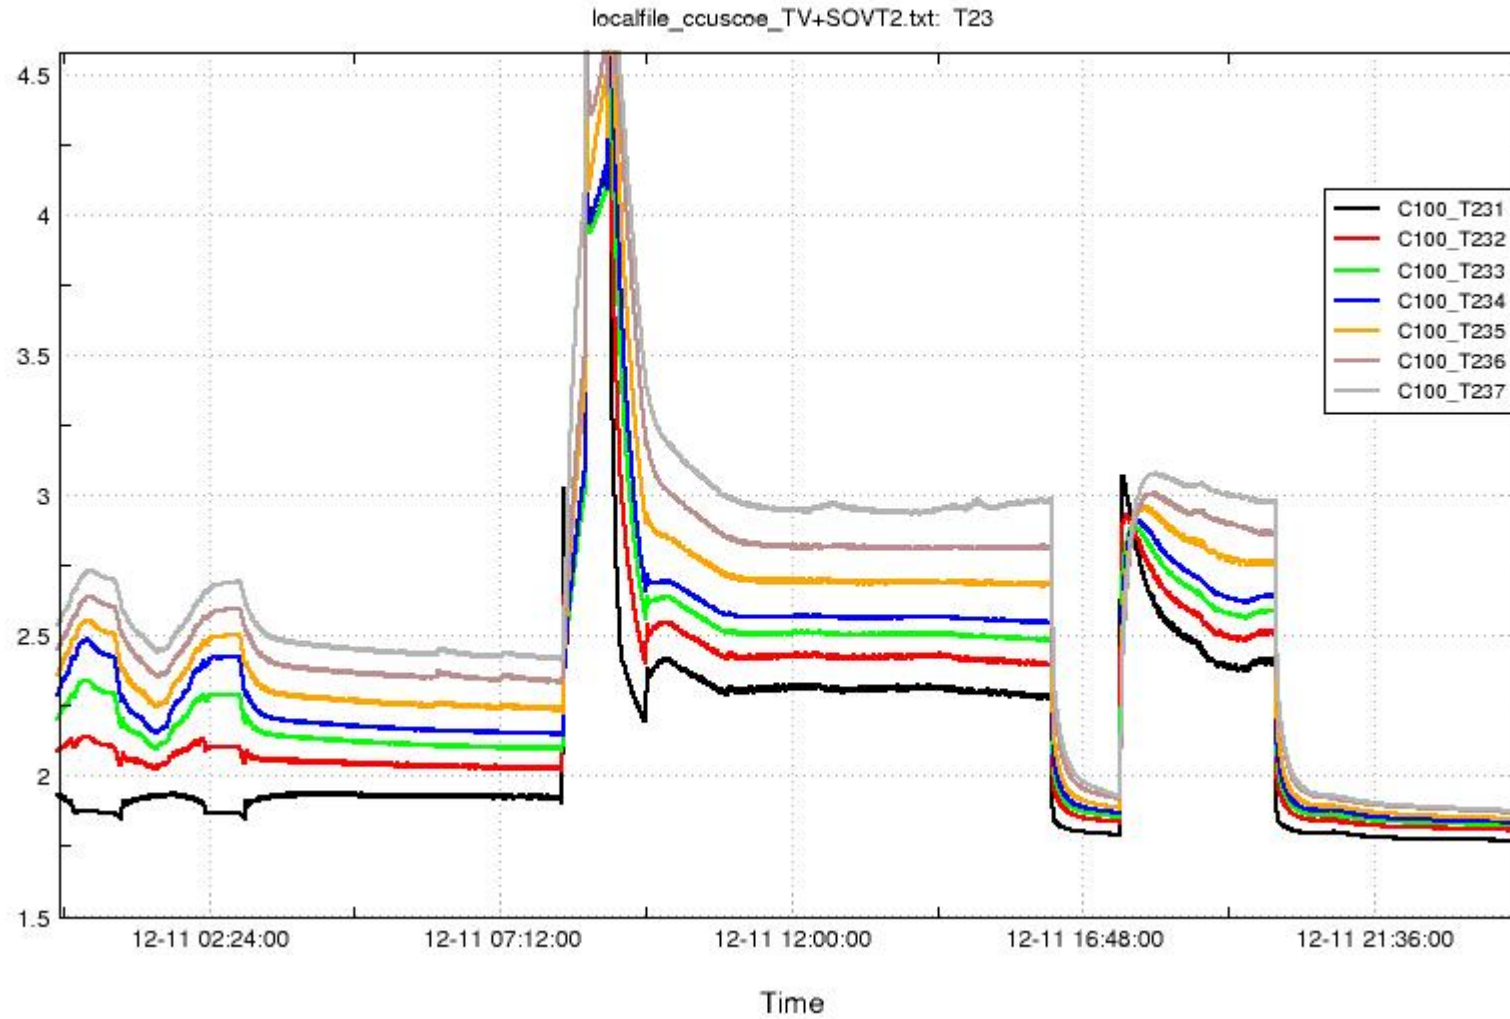
END OF DOCUMENT

	Name	Dep./Comp.		Name	Dep./Comp.
	Baldock Richard	FAE12		Suess Rudi	OTN/ASA44
	Barlage Bernhard	AED13	X	Theunissen Martijn	ASA43
	Bayer Thomas	ASA42		Vascotto Riccardo	HE Space
	Brune Holger	ASA45		Wagner Klaus	ASG23
	Chen Bing	HE Space	X	Wietbrock Walter	AET12
	Davis William	Captec		Wöhler Hans	ASG23
	Edelhoff Dirk	AED21		Wössner Ulrich	ASE252
	Fehringer Alexander	ASG15		Zumstein Armin	AED15
X	Fricke Wolfgang Dr.	AED 65			
	Geiger Hermann	ASA42			
	Grasl Andreas	OTN/ASA44			
	Grasshoff Brigitte	AET12			
X	Hamer Simon	Terma			
	Hanka, Erhard	FI522			
	Hendrikse Jeffrey	HE Space			
X	Hendry David	Terma			
	Hengstler Reinhold	ASA42			
	Hinger Jürgen	ASG23			
X	Hohn Rüdiger	AED65			
	Hopfgarten Michael	AET32			
	Huber Johann	ASA42			
	Hund Walter	ASE252			
X	Idler Siegmund	AED312			
	Ivány von András	FAE12			
	Jahn Gerd Dr.	ASG23			
X	Kölle Markus	ASA43	X	ESA/ESTEC	ESA
	König Werner	AET32	X	Thales Alenia Space Cannes	TAS-F
X	Koppe Axel	AED312		Thales Alenia Space Torino	TAS-I
X	Kroeker Jürgen	AED65			
	La Gioia Valentina	Terma			
	Lang Jürgen	ASE252		Instruments:	
	Langenstein Rolf	AED15		MPE (PACS)	MPE
	Langfermann Michael	ASA41	X	RAL (SPIRE)	RAL
	Liberatore Danilo	Rhea		SRON (HIFI)	SRON
X	Martin Olivier	Altec			
X	Maukisch Jan	ASA43			
X	Much Christoph	ASA43		Subcontractors:	
X	Müller Martin	ASA43		Austrian Aerospace	AAE
	Pietroboni Karin	AED65		Austrian Aerospace	AAEM
	Reichle Konrad	ASA42		BOC Edwards	BOCE
	Runge Axel	OTN/ASA44		Dutch Space Solar Arrays	DSSA
	Saal Christoph	External		EADS Astrium Sub-Subsyst. & Equipment	ASSE
	Schink Dietmar	AED321		EADS CASA Espacio	CASA
	Schmidt Thomas	AED15		EADS CASA Espacio	ECAS
	Schweickert Gunn	ASG23		European Test Services	ETS
X	Sonn Nico	ASG51		Patria New Technologies Oy	PANT
	Steininger Eric	AED321		SENER Ingenieria SA	SEN
X	Stritter Rene	AED11		Thales Alenia Space, Antwerp	TAS-ETCA

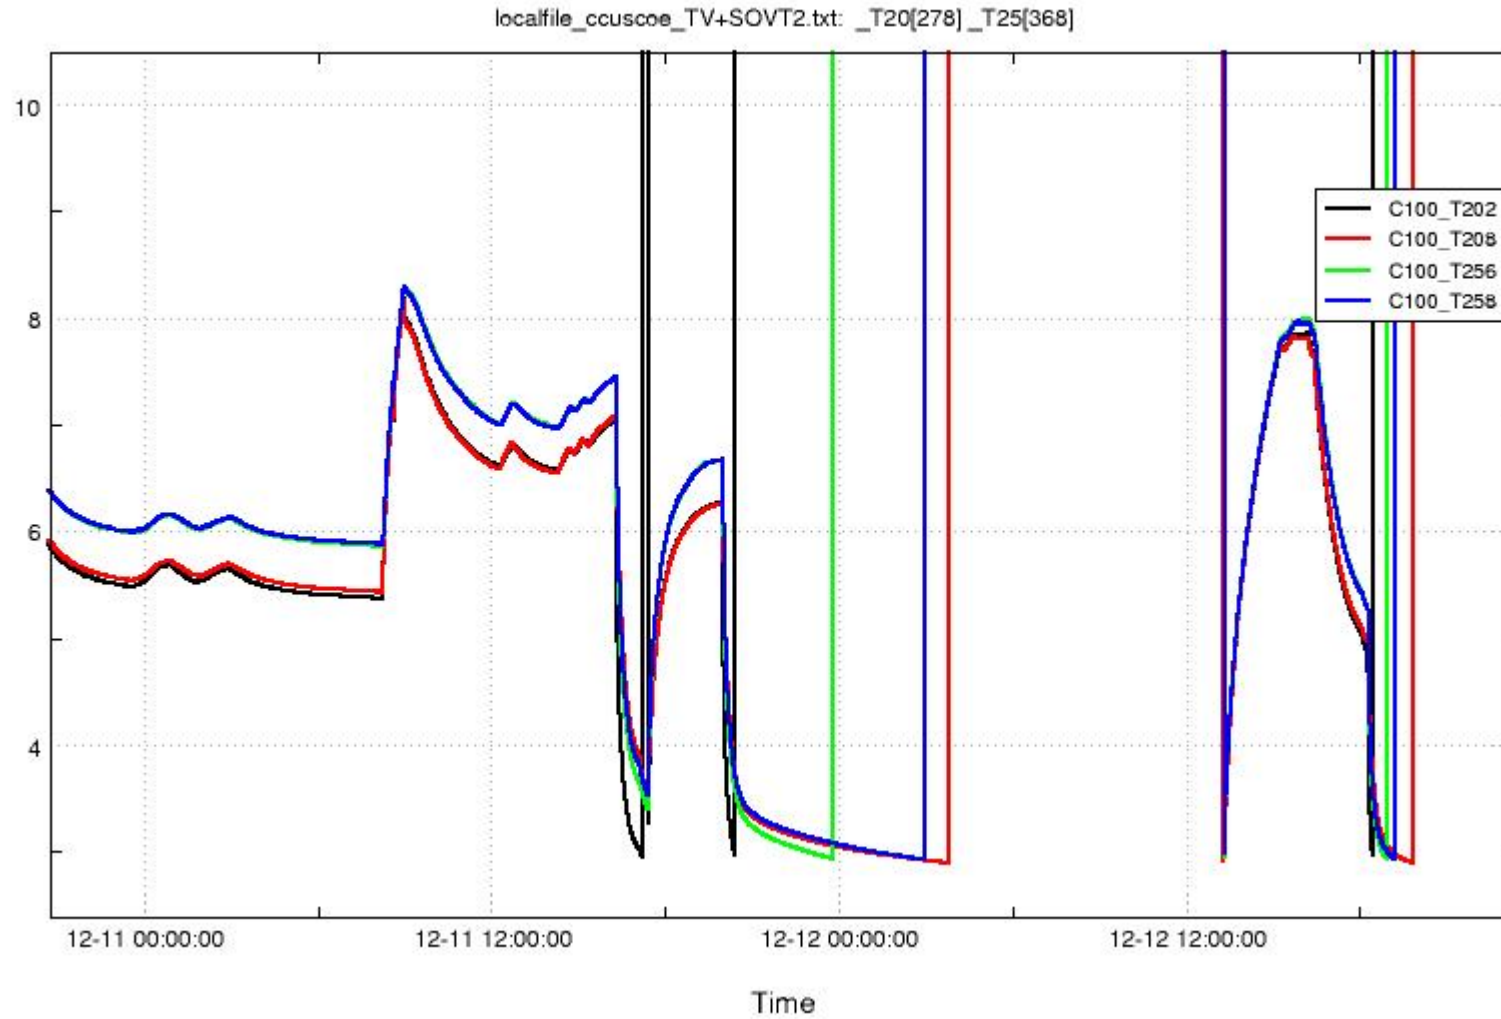
6 Appendix 2: Temperatures during SFT in TV Hot (Phase 14)



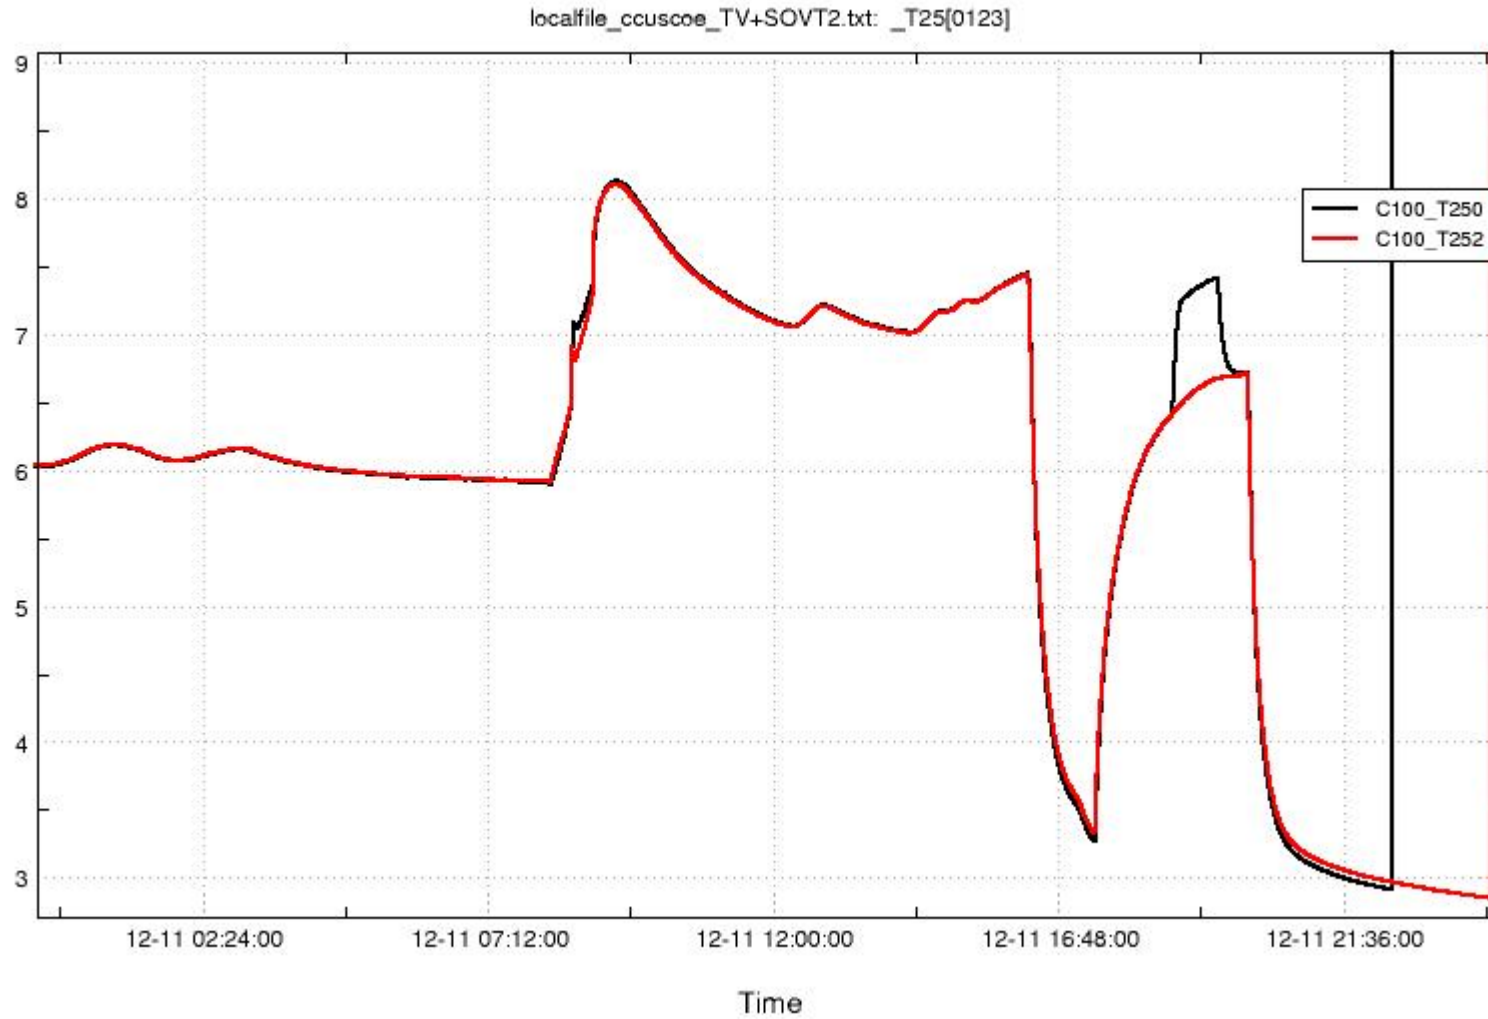
Level 0 Temperatures



Level 1 Temperatures



Level 2 Temperatures



Level 3 Temperatures

END OF DOCUMENT

	Name	Dep./Comp.		Name	Dep./Comp.
	Baldock Richard	FAE12	X	Theunissen Martijn	ASA43
	Barlage Bernhard	AED13		Vascotto Riccardo	HE Space
	Bayer Thomas	ASA42		Wagner Klaus	ASG23
	Brune Holger	ASA45	X	Wietbrock Walter	AET12
	Chen Bing	HE Space		Wöhler Hans	ASG23
	Davis William	Captec		Wössner Ulrich	ASE252
	Edelhoff Dirk	AED21		Zumstein Armin	AED15
	Fehringer Alexander	ASG15			
X	Fricke Wolfgang Dr.	AED 65			
	Geiger Hermann	ASA42			
	Gras Andreas	OTN/ASA44			
	Grasshoff Brigitte	AET12			
X H	amer Simon	Terma			
	Hanka, Erhard	FI522			
	Hendrikse Jeffrey	HE Space			
X	Hendry David	Terma			
	Hengstler Reinhold	ASA42			
	Hinger Jürgen	ASG23			
	Hofmann Rolf	ASE252			
X	Hohn Rüdiger	AED65			
	Hopfgarten Michael	AET32			
	Huber Johann	ASA42			
	Hund Walter	ASE252			
X	Idler Siegmund	AED312			
	Ivány von András	FAE12			
	Jahn Gerd Dr.	ASG23	X	ESA/ESTEC	ESA
X	Kölle Markus	ASA43	X	Thales Alenia Space Cannes	TAS-F
X	Koppe Axel	AED312		Thales Alenia Space Torino	TAS-I
X	Kroeker Jürgen	AED65			
	Lang Jürgen	ASE252			
	Langenste in Rolf	AED15		Instruments:	
	Langfermann Michael	ASA41		MPE (PACS)	MPE
	Liberatore Danilo	Rhea	X	RAL (SPIRE)	RAL
X	Martin Olivier	Altec		SRON (HIFI)	SRON
X	Maukisch h Jan	ASA43			
X	Much Christoph	ASA43			
X	Müller Martin	ASA43		Subcontractors:	
	Pietroboni Karin	AED65		Austrian Aerospace	AAE
	Reichle Konrad	ASA42		Austrian Aerospace	AAEM
	Runge Axel	OTN/ASA44		BOC Edwards	BOCE
	Saal Christoph	External		Dutch Space Solar Arrays	DSSA
	Schink Dietmar	AED321		EADS Astrium Sub-Subsyst. & Equipment	ASSE
	Schmidt Thomas	AED15		EADS CASA Espacio	CASA
	Schweickert Gunn	ASG23		EADS CASA Espacio	ECAS
X	Sonn Nico	ASG51		European Test Services	ETS
	Steininger Eric	AED321		Patria New Technologies Oy	PANT
X	Stritter Rene	AED11		SENER Ingenieria SA	SEN
	Suess Rudi	OTN/ASA44		Thales Alenia Space, Antwerp	TAS-ETCA