
Max-Planck-Institut für
Sonnensystemforschung

Rosetta-COSAC

To Planetary Science Archive Interface Control
Document

RLGS-SPEC-SONC_DPS-SCIE-9049-CNE

Issue 1.2

09 Feb. 2017

Prepared by: **Oliver Küchemann**
and **SONC**

Approved by: **Fred Goesmann**

Change Log

| Date | Sections Changed | Reasons for Change |
|-------------|--|--|
| 23/12/2010 | | Delivery of Issue 1.0 to PSA after peer review |
| 18/05/2015 | Updated: 2.3.3 In-Flight data products 2.3.6 Derived and other Data Products 2.3.7 Ancillary Data Usage 4.2 Datasets, Definition and Content Added: 3.2.2.2.5 Spacecraft Clock Count in PDS Labels Deleted: 3.4.3.4.2 Geometric Index File 3.4.3.6 Geometry Directory | Delivery of issue 1.1, updated for the Comet phase |
| 2017 | Updated: 3.1.4 File naming Convention 3.4.3.7 Label Directory 3.4.3.8 Document Directory | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

| Section | Description |
|---------|-------------|
| | |
| | |

Table Of Contents

| | | |
|----------|--|-----------|
| 1 | Introduction | 3 |
| 1.1 | Purpose and Scope | 3 |
| 1.2 | Archiving Authorities | 3 |
| 1.3 | Contents | 3 |
| 1.4 | Intended Readership | 3 |
| 1.5 | Scientific Objectives | 4 |
| 1.6 | Applicable Documents | 4 |
| 1.7 | Relationships to Other Interfaces | 4 |
| 1.8 | Acronyms and Abbreviations | 4 |
| 1.9 | Contact Names and Addresses | 5 |
| 2 | Overview of Instrument Design, Data Handling Process and Product Generation | 5 |
| 2.1 | Scientific Objectives | 7 |
| 2.2 | Data Handling Process | 8 |
| 2.3 | Overview of Data Products | 8 |
| 2.3.1 | Pre-Flight Data Products | 8 |
| 2.3.2 | Instrument Calibrations | 8 |
| 2.3.3 | In-Flight Data Products | 8 |
| 2.3.4 | Software | 10 |
| 2.3.5 | Documentation | 10 |
| 3 | Archive Format and Content | 11 |
| 3.1 | Format and Conventions | 11 |
| 3.1.1 | Deliveries and Archive Volume Format | 11 |
| 3.1.2 | Data Set ID Formation | 11 |
| 3.1.3 | Data Directory Naming Convention | 12 |
| 3.1.4 | Filenaming Convention | 12 |
| 3.2 | Standards Used in Data Product Generation | 13 |
| 3.2.1 | PDS Standards | 13 |
| 3.2.2 | Time Standards | 13 |
| 3.2.3 | Reference Systems | 17 |
| 3.3 | Data Validation | 18 |
| 3.3.1 | Data Quality ID | 18 |
| 3.4 | Content | 18 |
| 3.4.1 | Volume Set | 18 |
| 3.4.2 | Data Set | 19 |
| 3.4.3 | Directories | 19 |
| 4 | Detailed Interface Specifications | 23 |
| 4.1 | Structure and Organization Overview | 23 |

| | | |
|------------|---|------------|
| 4.2 | Data Sets, Definition and Content | 23 |
| 4.3 | Data Product Design | 24 |
| 4.3.1 | Data Product Raw COSAC data (Level 1) | 24 |
| 4.3.2 | Data Product Design of Science Data (Level 2 and 3) | 25 |
| 4.3.3 | Data Product Design of Calibrated HK Data (Level 3) | 118 |
| 5 | Appendix A : Available Software to read PDS files | 128 |
| 6 | Appendix B : Example of PDS combined detached label for COSAC GC level 2 data product (version previous to 1.8) | 128 |
| 7 | Appendix C : Example of PDS combined detached label for COSAC GC level 2 data product (version 1.8) | 130 |
| 8 | Appendix D : Example of PDS combined detached label for COSAC MS level 2 data product (version previous to 1.8) | 133 |
| 9 | Appendix E : Example of PDS combined detached label for COSAC MS level 2 data product (version 1.8) | 135 |
| 10 | Appendix F : Example of PDS combined detached label for COSAC GC/MS level 2 data product (version previous to 1.8) | 137 |
| 11 | Appendix G : Example of Directory Listing of Data Set RL-CAL-COSAC-2-CVP-V1.0 | 140 |
| 12 | Appendix H : PDS Glossary | 142 |

1 Introduction

1.1 Purpose and Scope

The purpose of this EAICD (Experimenter to (Science) Archive Interface Control Document) is two fold. First it provides users of the COSAC instrument with detailed description of the product and a description of how it was generated, including data sources and destinations. Secondly, it is the official interface between COSAC and PSA.

1.2 Archiving Authorities

The Planetary Data System Standard is used as archiving standard by

- NASA for U.S. planetary missions, implemented by PDS
- ESA for European planetary missions, implemented by the Research and Scientific Support Department (RSSD) of ESA

ESA's Planetary Science Archive (PSA)

ESA implements an online science archive, the PSA,

- to support and ease data ingestion
- to offer additional services to the scientific user community and science operations teams as e.g.
 - search queries that allow searches across instruments, missions and scientific disciplines
 - several data delivery options as
 - direct download of data products, linked files and data sets
 - ftp download of data products, linked files and data sets

The PSA aims for online ingestion of logical archive volumes and offers the creation of physical archive volumes on request.

1.3 Contents

This document describes the data flow of the COSAC instrument on Rosetta from the s/c until the insertion into the PSA for ESA. It includes information on how data were processed, formatted, labeled and uniquely identified. The document discusses general naming schemes for data volumes, data sets, data and label files. Standards used to generate the product are explained. Software that may be used to access the product is explained further on.

The design of the data set structure and the data product is given. Examples of these are given in the appendix.

1.4 Intended Readership

The staff of the archiving authority (Planetary Science Archive, ESA, RSSD, design team) and any potential user of the COSAC data.

1.5 Scientific Objectives

1.6 Applicable Documents

- AD 1. Planetary Data System Preparation Workbook, February 17, 1995, Version 3.1, JPL, D-7669, Part1
- AD 2. Planetary Data System Standards Reference, August 1, 2003, Version 3.6, JPL, D-7669, Part2
- AD 3. CDMS Subsystem & Instruments Electrical Interface Definition (Extract from REID-A) and Generic Payload Control.
- AD 4. CDMS Command and Data Management System - Subsystem Specification RO-LCD-SP-3101 29/08/2001, Issue 3, Rev. 5
- AD 5. CDMS Command and Data Management System - Operation Manual RO-LCD-SW-3402 12/02/2001, Issue 1, Rev. 2
- AD 6. Rosetta Time handling RO-EST-TN-3165, issue 1 rev 0, February 9, 2004
- AD 7. DDID- Data Delivery Interface Document RO-ESC-IF-5003 Issue B6 23/10/2003
- AD 8. ROSETTA Archive Generation, Validation and Transfer Plan, January 10, 2006, Issue 2, Rev. 3, RO-EST-PL-5011
- AD 9. COSAC Software Interface Description, RO-LCO-IF-340001, 05 December 2005, Issue 1, Rev. 13.
- AD 10. COSAC Software Interface Description, RO-LCO-IF-340001, 18 June 2009, Issue 3, Rev. 0.
- AD 11. CDMS DDD, RO-LCD-SW-3610, Issue 6 and above
- AD 12. ROSETTA Archive Conventions RO-EST-TN-3372 Issue 7, Rev. 9, 06 April 2015
- AD 13. COSAC, The Cometary Sampling and Composition Experiment on Philae, Space Sci. Rev., 128 (1-4), p.257-280, Feb. 2007

1.7 Relationships to Other Interfaces

No products, software and documents would be affected by a change in this EAICD.

1.8 Acronyms and Abbreviations

| | |
|--------------|--|
| CDMS | Command and Data Management System |
| COSAC | COmetary SAMpling and Composition |
| DDS | Data Disposition System |
| DECW | Data Error Control Word |
| EGSE | Electrical & Electronic Ground Support Equipment |
| ESS | Electrical Support System |
| ESTEC | European Space Research and Technology Centre |
| FIFO | First In First Out |
| FM | Flight Model |
| FS | Flight Spare |
| GRM | Ground Reference Model |
| HK | Housekeeping |
| LOBT | Lander On Board Time |
| OBT | On Board Time |

| | |
|-------------|--|
| OBDH | On Board Data Handling |
| OOBT | Orbiter On Board Time |
| PDS | Planetary Data System |
| PECW | Packet Error Control Word |
| PID | Process Identifier |
| PSA | Planetary Science Archive |
| QM | Qualification Model |
| RF | Radio Frequency |
| SC | Science |
| SCET | Spacecraft Event Time |
| SD2 | Sample Drill & Distribution System |
| SSIF | Subsystem Interface |
| SFDU | Standard Formatted Data Unit |
| SONC | Science Operations and Navigation Center (CNES-Toulouse) |
| TBC | To Be Confirmed |
| UTC | Universal Time Coordinated |

1.9 Contact Names and Addresses

| Name | Company/University | e-mail |
|-------------------|--------------------|--|
| Henning Fischer | MPS | fischerh@mps.mpg.de |
| Fred Goesmann | MPS | goesmann@mps.mpg.de |
| Oliver Kuechemann | MPS | Oliver.kuechemann@dlr.de |
| Reinhard Roll | MPS | roll@mps.mpg.de |

2 Overview of Instrument Design, Data Handling Process and Product Generation

The COSAC experiment hardware may be structured into a pyrolytic section, a gas-chromatograph, a mass spectrometer, a manifold and gas supply system, and a unit for control, data handling, and housekeeping. For a more complete description of the COSAC instrument and its scientific objectives refer to (AD 13, a copy of this paper can be found in the DOCUMENT directory as COSAC.PDF).

The pyrolytic section

Central to the pyrolytic section are the ovens. These are cylindrical containers made of platinum with a volume of 3 mm diameter and 5 mm height, which are mounted on the carousel of the SD² sample distribution system. Two types of ovens are available. The medium temperature ovens are designed for temperatures up to 180°C. This type of oven is equipped with an optical window to allow inspection and infrared imaging spectroscopy of the samples by the CIVA microscopic camera. The high temperature ovens have no window and can be heated up to 600°C. Each oven has its own wound-on

Platinum heating filament and a Chromel-Alumel thermo-couple for temperature measurement. For gas generation, the oven is heated stepwise to temperature levels selected by telecommand. At each of the 64 levels between -100°C and +600°C analyses can be performed. The normal temperature range in which all combinations of instruments can be used is, however, limited to -100°C to +180°C. The ovens are filled by the sampling device (SD²) which stuffs the material in and measures the filling height. Then, the filled oven is moved to the COSAC "Tapping Station" which, upon command, presses a ceramic sphere onto the rim of the oven such that gas-tight sealing is accomplished.

The COSAC Tapping Station is a twin device for two neighbouring ovens. The main terminal is connected to the GC via a stainless steel pipe penetrating the sealing ceramic sphere while the side terminal is connected to the MS in the same manner. The Tapping Station also provides the electrical contacts to the ovens which are required for heating and temperature control.

The gas chromatograph (GC)

Gas chromatography is a well-established, wide spread, and powerful method for chemical analysis of volatile organic compounds. It is based on a physical principle, namely that the affinity between a solid or fluid surface ("stationary phase") and a gaseous substance is characteristic for each combination of stationary phase and gas. The gas sample to be analyzed is injected into a gas ("carrier gas") streaming through a capillary tube coated on the inside with a selected stationary phase. This "packet" of gas containing different molecular species separates into its different chemical components during the journey through the capillary tube because some species rest longer on the stationary phase than others. In COSAC, the arrival of a packet at the exit of the capillary is registered by using the effect that it alters the heat conductivity of the carrier gas. One of the advantages of gas chromatography coupled with thermal conductivity detectors besides its simplicity is that the sample molecules are not destroyed and can subsequently be subjected to mass spectroscopic analysis.

The COSAC gas-chromatography unit consists of eight principally identical units. Each of them comprises a gas injector, a capillary column of 10 - 15 m length and 0.15 – 0.25 mm ID, and a thermal conductivity detector. The capillaries are wound to 100 mm ID (inner diameter) spools in parallel with resistive wires for heating. Each spool is compacted by heat resistive glue to form a self-supporting structure. The temperature of the columns can be set by telecommand, the default temperature being 30° C as for the whole GC piping system.

The time of flight (TOF) mass spectrometer (MS)

The MS is a high-resolution TOF instrument, with an electron-impact ionization source, a multi-sphere-plate secondary electron multiplier as detector and a time-to-digital converter (TDC) for signal and flight time registration. The instrument is of the linear reflectron-type with the ion source at one and the detector at the other end. For determining an m/q spectrum, all ions inside the source are accelerated into the flight path with principally the same energy. Therefore heavy ions travel slower than light ones. In the low resolution mode, only the single flight path of approximately 370 mm from the source to the detector is used. In this case, the $M/\Delta M$ is 350 for ions of mass 70. For achieving a higher mass resolving power, the MS can be used in the multi-turn mode. This mode is possible due to two gridless reflectors, one at the source side and the other at the detector side

Ion source and ion acceleration

An electron impact "storage" ion source is employed. Three thermal electron emitters can be used alternatively thus providing redundancy. The electron flux can be varied by telecommand. The storage capability allows to produce ions for ~ 200 m s while the release pulse is only ~ 1 m s. The ions are accelerated to 1500 eV at the source. Ion pulse are released with 1 KHz repetition rate (4 KHz optimal). The ion travel gate time of 1 ms is more than sufficient to cover the envisaged mass range of 12 to 1500 AMU, even in modes with a high number of passes.

Amplifier, detector and signal registration

The ions are post-accelerated in front of the detector to 4 keV to be registered with high probability in the multi-sphere-plate electron multiplier. An output signal is normally produced by a single ion. The time of the output signal of the amplifier is recorded with a resolution of 2 ns. This time resolution is realized by means of a 33 MHz clock, in connection with a switchable digital delay line of sixteen 2 ns

elements. The time of the signal is transmitted to a fast FIFO memory. The FIFO can be read out asynchronously during the measurement. The times are then transmitted to another memory which serves also for spectrum integration. Usually, the measurements are repeated 216 times. That means that 65536 mass spectra are taken in approximately 1 minute. Resolution enhancement is possible by starting every other spectrum with 1 ns delay.

Manifold and gas system

The manifold is a system of pipes, valves, pressure detectors, and pressure regulators mainly required for the gas chromatograph (GC). The manifold controls the flow of the evolved gas from the oven to the GC, and distributes the carrier gas (Helium) and the calibration gas. The calibration gas, a mixture of four noble gases (He, Ne, Ar, Kr), is used to optimize the mass spectrometer performance by fine-tuning of voltages, to calibrate the time of flight mass spectrometer and to check the GC health status and retention times. The manifold also includes a "split" to feed the gas from the GC detectors to the MS ion source at a suitable pressure. All of the gas routing and switching as well as the seizing of the samples to be injected is accomplished by on/off valves. These valves are electrostatically operated micro valves, with practically zero power consumption.

The carrier gas Helium is stored in two 330 cm³ tanks at 30 bar. The calibration gas is contained in a 25 cm³ tank at 1 bar. Thermally operated valves are employed for pressure regulation of the carrier gas and the calibration gas. These valves are open when heated. At closed position, the gas flow is undetectably low (< 10-11 mbar l/s). Therefore this type of valve is also used to seal the gas tanks. One carrier gas tank is in addition equipped with a single-shot valve for redundant sealing (during cruise).

Control and data handling unit

The instrument communicates with the control and data management system (CDMS) of Philae through a DPU board including a Harris RTX 2010 processor, a PROM, an EEPROM, a SRAM, and additional controllers. This board is housed inside the ROSETTA Lander Common Electronic Box. The data flow between the processor and the instrument is routed through an additional interface board which also hosts the mass memory of 3Mx16 bit, sufficient for storing the data collected during a measurement sequence in GC / MS coupling mode.

Most of the control logics is realized in a group of four Field Programmable Gate Arrays (FPGAs). In addition the FPGAs control of the pyrolytic unit, the high voltages, the ion source, the time to digital converter, the MS spectrum accumulation, and the main activities of the GC unit including heater, valve, injector switching and data registration.

The software controlling the experiment is written in FORTH, the native programming language of the Harris RTX 2010, to take full advantage of the processor's internal stack-based structure.

The main tasks of the software are:

- control of the experiment during measurement cycles
- data formatting and pre-processing
- in-flight calibration
- collection of housekeeping data
- handling of data communication to and from the CDMS
- data compression

The algorithms for controlling of the different measurement cycles are part of the flight software stored in the DPU's EEPROM. Several telecommands (TCs) were defined for uploading of new parameters for the fine-tuning of these onboard algorithms prior to measurements. Additional TCs are available for software maintenance tasks and debugging in case of a non-nominal behaviour.

2.1 Scientific Objectives

The main field the COSAC instrument is specially designed for, is the chemical composition of volatiles in the cometary matter. Special emphasis is put on the identification of organic molecules with high molecular mass numbers. Such molecules are of special interest to the COSAC team because they might be the "pre-biotic" building blocks of life on Earth and other planets.

2.2 Data Handling Process

The SONC is responsible for COSAC data sets generation and delivery to the PSA.

The COSAC telemetry data is provided by the ESA DDS (Data Distribution Server). Following the operations plan the SONC pulls out archived packets (SC and HK) by direct request to the DDS via FTP and stores them into SONC database.

The raw data are passed through the SONC data processing software for decommutation, conversion to physical values and calibration. The calibrated data are also stored into SONC database.

Science (SC) and Housekeeping (HK) raw data are available through W3-SONC server (<http://sonc-rosetta.cnes.fr>) and the authorized users can get them for a selected time interval as binary files with .rolbin extension.

To read and to understand the raw data the user shall refer to AD 9 and AD 3, and use the software developed to display the raw data in a readable way.

The software called COSAC-EGSE is the software developed to visualize the raw data.

SC data are available through W3-SONC server (<http://soncv2-rosetta.cnes.fr>) and authorized users can get refined data for a selected time interval as ASCII files with .spr extension (directly readable). Calibrated HK data are available through W3-SONC for a selected time interval as ASCII files with .csv extension (directly readable).

The W3-SONC provides interactive plots of COSAC data (housekeeping & science data).

After the proprietary period, the SONC team provides the raw data, refined data and plots to the ESA-PDS team.

The delivery format is described in this document.

2.3 Overview of Data Products

2.3.1 Pre-Flight Data Products

Some selected ground data are available. The delivered file contains last ground data produced by the flight hardware that were recorded prior to delivery to ESTEC in July 2002. There are :

Two GC-MS runs:

Each of them 3 min, performed without a sample. The idea was to verify the operation of the instrument without contaminating it.

17 MS spectra:

Spectra 0-6 contain calibration gas (a mixture of all stable noble gasses) measured in low resolution.

Spectra 7 and 8 are empty.

Spectra 9-12 contain data used to verify the multi-reflection mode (difficult to interpret).

Spectra 13-16 contain data with calibration gas measured in high resolution mode.

2.3.2 Instrument Calibrations

The file COSAC_CALIBRATION_DESC.TXT (located in the DOCUMENT directory) provides information about Instrument calibration.

There are no calibration data archived.

2.3.3 In-Flight Data Products

The in-flight data correspond to all the on board data.

They can be produced during following mission phases:

| MISSION_PHASE_NAME | Abbreviation | Start Date (dd/mm/yyyy) | End Date (dd/mm/yyyy) | COSAC data (1) |
|--|--------------|----------------------------|--------------------------|-------------------|
| Commissioning (part 1) | CVP1 | 05/03/2004 | 06/06/2004 | X |
| Cruise 1 | CR1 | 07/06/2004 | 05/09/2004 | |
| Commissioning (part 2) | CVP2 | 06/09/2004 | 16/10/2004 | X |
| Earth Swing-by 1 (including PC#0) | EAR1 | 17/10/2004 | 04/04/2005 | X |
| Cruise 2 (including PC#1,2) | CR2 | 05/04/2005 | 28/07/2006 | X |
| Mars Swing-by (including PC#3,4,5) | MARS | 29/07/2006 | 28/05/2007 | X |
| Cruise 3 | CR3 | 29/05/2007 | 12/09/2007 | |
| Earth Swing-by 2 (including PC#6,7) | EAR2 | 13/09/2007 | 27/01/2008 | X |
| Cruise 4-1 (including PC#8) | CR4A | 28/01/2008 | 03/08/2008 | X |
| Steins Flyby | AST1 | 04/08/2008 | 05/10/2008 | |
| Cruise 4-2 (including PC#9) | CR4B | 06/10/2008 | 13/09/2009 | X |
| Earth Swing-by 3 (including PC#10) | EAR3 | 14/09/2009 | 13/12/2009 | X |
| Cruise 5 (including PC#12) | CR5 | 14/12/2009 | 06/06/2010 | X |
| Lutetia Flyby | AST2 | 07/06/2010 | 10/09/2010 | X |
| RV Manoeuver 1 (including PC#13) | RMV1 | 11/09/2010 | 13/07/2011 | |
| Cruise 6 | CR6 | 14/07/2011 | 22/01/2014 | |
| Post Hibernation Commissioning | PHC | 09/04/2014 | 24/04/2014 | X |
| Pre-delivery calibration Science | PDCS | 25/04/2014 | 11/11/2014 | X |

(1) The last column indicates if COSAC data are available

After the release of the Lander, we distinguish four phases, characterized by:

- The Start and Stop dates need to be expressed in seconds
- The Lander has its own Auxiliary data

| | | | | |
|----------------------------|-----|---------------------|---------------------|-----|
| Separation/Descent/Landing | SDL | 2014/11/12 08:35:02 | 2014/11/12 15:34:04 | |
| Rebounds | RBD | 2014/11/12 15:34:05 | 2014/11/12 17:30:20 | X |
| First Science Sequence | FSS | 2014/11/12 17:30:21 | 2014/11/15 01:00:00 | X |
| Long Term Science | LTS | tbd | tbd | tbc |

The data, both scientific and housekeeping, are listed in document AD 10 and AD 3.

The housekeeping data are automatically collected from CDMS when the instrument is powered, (about one packet each 4 min16s).

Remark: although the CDMS Subsystem Spec states that the HK collection interval is 2 sec, this is true only for CDMS itself. If you have a closer look at some Unit HK packets, you can clearly see that the deltaT is closer to 4:24 than to 4:16. This is based on 'insider information', it's not covered by any documentation.

The SC data are collected by COSAC into internal buffers, formatted into the science data stream structure and transferred to CDMS. The internal buffer (Mass Memory) has a size of 3M x 16 (6 Mbytes) and can be controlled to act in different modes:

- store data without transmitting them to CDMS
- buffer data during measurements, transfer packets to CDMS whenever possible (default)

In flight data products covers 3 levels :

- Raw data (CODMAC level 1) : HK and SC COSAC packets as received from DDS.
- Uncalibrated MS, GC, GC/MS Spectra (CODMAC level 2)
- Calibrated HK data (CODMAC level 3) : HK data in scientific units.
- Calibrated SC data (CODMAC level 3) : preliminary mass scales

2.3.4 Software

The software provided enables the user to read the binary packets (CODMAC level 1) stored in the PDS archive.

Housekeeping and Science Data are calibrated (to some extent) and displayed on screen, spectral data can be exported into commonly used formats.

Note: as the Level 2 data are archived, the EGSE software usage shouldn't be needed.

2.3.5 Documentation

The documentation directory contains the following documents:

- COSAC Software Interface Description [AD 10]
- EAICD (this document)
- COSAC_CALIBRATION_DESC.TXT
- COSAC, the Cometary Sampling and Composition experiment on Philae
- TIMELINE_ph.TXT, timeline ASCII file for phase ph
- TIMELINE_ph_DESC.TXT, description of the timeline file for phase ph
- TIMELINE_ph_obty.PNG, timeline Image file for phase ph and observation type obty

2.3.6 Derived and other Data Products

Derived data shall include the molecular composition of the samples and reference gases analysed by the COSAC FM. There may be combined data products with other instruments (TBD) such as SD2, ÇIVA and Ptolemy.

2.3.7 Ancillary Data Usage

The Lander Auxiliary Data on the comet (Position/Orientation at any time + Comet models + Ancillary Data from the instruments) will be available in an ANCDR (Ancillary Data Record) whose definition is in progress, pending the Lander auxiliary data reconstruction.

The ancillary data needed by COSAC is the drill depth provided by SD2.

3 Archive Format and Content

3.1 Format and Conventions

Data processing level number used in COSAC naming scheme conforms to CODMAC data level definitions:

- level 1: Raw Data Telemetry data with data embedded
- level 2: Edited Data Corrected for telemetry errors and split or decommutated into a data set for a given instrument. Sometimes called Experimental Data Record. Data are also tagged with time and location of acquisition. Corresponds to NASA Level 0 data.
- level 3: Calibrated Data; Edited data that are still in units produced by instrument, but that have been corrected so that values are expressed in or are proportional to some physical unit such as radiance. No resampling, so edited data can be reconstructed. NASA Level 1A.

3.1.1 Deliveries and Archive Volume Format

A data set is delivered for each **simple mission phase**. Each data set contains **only one level data processing**.

The list of simple mission phases is given in AD 12.

A data set is level-stamped as below :

- Level 1 when it contains :
 - SC and HK raw data (packets) contained in .rolbin file (CODMAC level 1).
- Level 2 when it contains :
 - Uncalibrated MS, GC, GC/MS Spectra (CODMAC level 2)
 - Quick looks, chromatograms and mass spectra in PNG files (CODMAC level 2)
- Level 3 when it contains :
 - Calibrated SC and HK data (CODMAC level 3)
 - Quick looks, chromatograms and mass spectra in PNG files (CODMAC level 3)

In addition a data set contains :

- Software (see chapter 3.4.3.6)
- Documents (see chapter 3.4.3.8)

A new version of a data set is provided when :

- calibration information refining
- new data processing
- higher levels production.

3.1.2 Data Set ID Formation

The following naming formation scheme is used for the data sets :

DATA_SET_ID = <INSTRUMENT_HOST_ID>-<target id>-<INSTRUMENT_ID>-<data processing level number>-<mission phase abbreviation>-<version>

DATA_SET_NAME = <INSTRUMENT_HOST_NAME> <target name> <INSTRUMENT_ID> <data processing level number> <mission phase abbreviation> <version>

See appendix AD 12

Examples of DATA_SET_ID and DATA_SET_NAME for COSAC data obtained in-flight during CVP Block1:

DATA_SET_NAME = "ROSETTA-LANDER CAL COSAC 3 CVP V1.0"

DATA_SET_ID = "RL-CAL-COSAC-3-CVP -V1.0"

3.1.3 Data Directory Naming Convention

See § 3.4.3

3.1.4 Filenaming Convention

The following file naming scheme is used:

{exp}_{source and datatype}_{begin of observation}_{length of observation}.{ext}

- **exp** (3 character) = COS (fixed)
- **source and datatype** (5 characters) = DXXTL
 - D = data, **G** for Ground, **F** for Flight
 - XX = source
 - **GC** for GC measurements
 - **MS** for MS measurements
 - **GM** for combined GC & MS measurements
 - **XX** when unknown, that is in rolbin files and HK files
 - T = type, **S** for Science Data, **H** for Housekeeping Data, **B** for files with both data mixed together
 - L = CODMAC level : **1** for raw data, **2** for edited data, **3** for calibrated data, **P** for Plots
- **begin of observation** (12 characters) = time of measurement in UTC yymmddhhmmss:
 - yy = year
 - mm = month
 - dd = day
 - hh=hour
 - mm = minute
 - ss = second
- **length of observation** (4 characters) = duration of measurement in minutes.
 - For SC data, a file contains data from one measurement session (one spectrum for MS or GC measurements, severals spectrums for combined GC & MS measurements).
 - For calibrated HK flight data, a session is determined by a gap of 24 hours between successive data. Then, a new file is created.
- **ext** = extension of file. For COSAC possible extensions are:
 - ROL for Raw Data containing HK and SC data mixed together (CODMAC level 1)
 - LBL for label file associated to one or more data files (TAB) (in the case of "combined detached labels")
 - TAB for raw and calibrated SC data (CODMAC levels 2 and 3)

- TAB for calibrated HK data (CODMAC level 3)
- PNG for Plot Data in BROWSE directory (plots of TAB and CSV data)

The data files (TAB) pointed by a “combined detached label” file have the field “length of observation” replaced by the COSAC data type (see 4.3.2 for the COSAC measurements description):

- CONF for TC_ID, CSIB_CFG_ID, CSIB_PAR_ID data.
- TIME for TIME_ID data
- ADCM for ADC_MS_ID data
- ADCG for ADC_GC_ID data
- HKID for HK_ID data
- HBID for HK burst table
- GCID for GC_ID spectrum data
- MSID for MS_ID spectrum data

Example:

```
COS_FMSS2_041006190521_0004.LBL
COS_FMSS2_041006190521_CONF.TAB
COS_FMSS2_041006190521_HKID.TAB
COS_FMSS2_041006190521_TIME.TAB
COS_FMSS2_041006190521_ADCM.TAB
COS_FMSS2_041006190521_MSID.TAB
```

Data included in these files are flight MS data recorded on 06 Oct 2004 beginning at 19:05:21 (UTC) for a duration of 4 minutes.

Example for COSAC flight software version 1.8:

```
COS_FMSS2_090930164707_0001.LBL
COS_FMSS2_090930164707_CONF.TAB
COS_FMSS2_090930164707_HKID.TAB
COS_FMSS2_090930164707_HBID.TAB
COS_FMSS2_090930164707_MSID.TAB
```

Data included in these files are flight MS data recorded on 30 September 2009 beginning at 16:47:07 (UTC) for a duration of 1 minutes.

3.2 Standards Used in Data Product Generation

3.2.1 PDS Standards

The archive structure given in this document complies with PDS standard version 3.6.

3.2.2 Time Standards

3.2.2.1 Generalities

This paragraph gives a summary of the different existing formats in the Rosetta Ground segment, from their generation by the instruments to their availability at SONC :

- ◆ The Lander CDMS requires the scientific instruments to transmit the data by bursts of 8 or 64 bytes (4 or 32 16-bit words)
- ◆ When sufficient data are received, the CDMS builds packets containing 256 bytes of instrument data.

The CDMS adds 18 bytes header (unit PID, sequence count, OOBT : Orbiter OBT, data type) and a 2 bytes checksum (DECW) and creates packets with a fixed length of 276 bytes¹. For transmission between Lander and Orbiter, a 4 bytes synchro header and a 2 bytes trailing checksum (PECW) are added, increasing the packet size to 282 bytes. The extra bytes are removed by the ESS.

To comply with ESA requirements, the time registered in the CDMS packets is the **OOBT**. It is reconstituted from the LOBT, as shown in Figure 1:

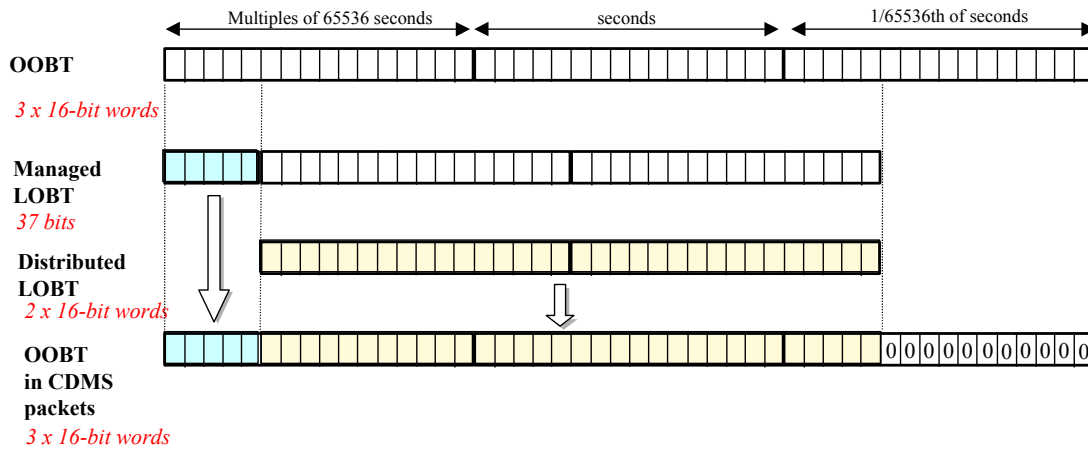


Figure 1 Reconstruction of on board time in CDMS packets

- ◆ The ESS groups together several packets and passes them to the Orbiter OBDH, which transmits them according to the Space/Ground interface. This part is transparent for the Lander ground segment.
- ◆ The data are delivered by the Rosetta Data Distribution System (DDS) to the SONC in SFDU format. A SFDU file is basically a collection of 276-byte packets interspersed with auxiliary information records. An 18 bytes SFDU header is added to the CDMS 276-byte packets. This header contains information added at the ground station (time correlated OBT, ground station id, virtual channel id, service channel, type of data, time quality)
- ◆ SONC processes the SFDU files to retrieve the 276-byte packets. This format is available in the SONC database.

The relationship between both time (OOBT and LOBT) formats is given in AD 11.

¹ The Lander CDMS header and the headers of the telemetry source packets from the Orbiter instruments are quite similar. There is a difference in the data field header. The byte containing PUS version, checksum flag and spare fields is set to zero in the CDMS header. Besides the last byte of the OOBT is set to zero in the CDMS header. The CDMS header has an additional word (2 bytes) after the data field header named "FORMAT ID". This word is mainly used for HK data and it contains the HK scanning period and the SID (structure identification).

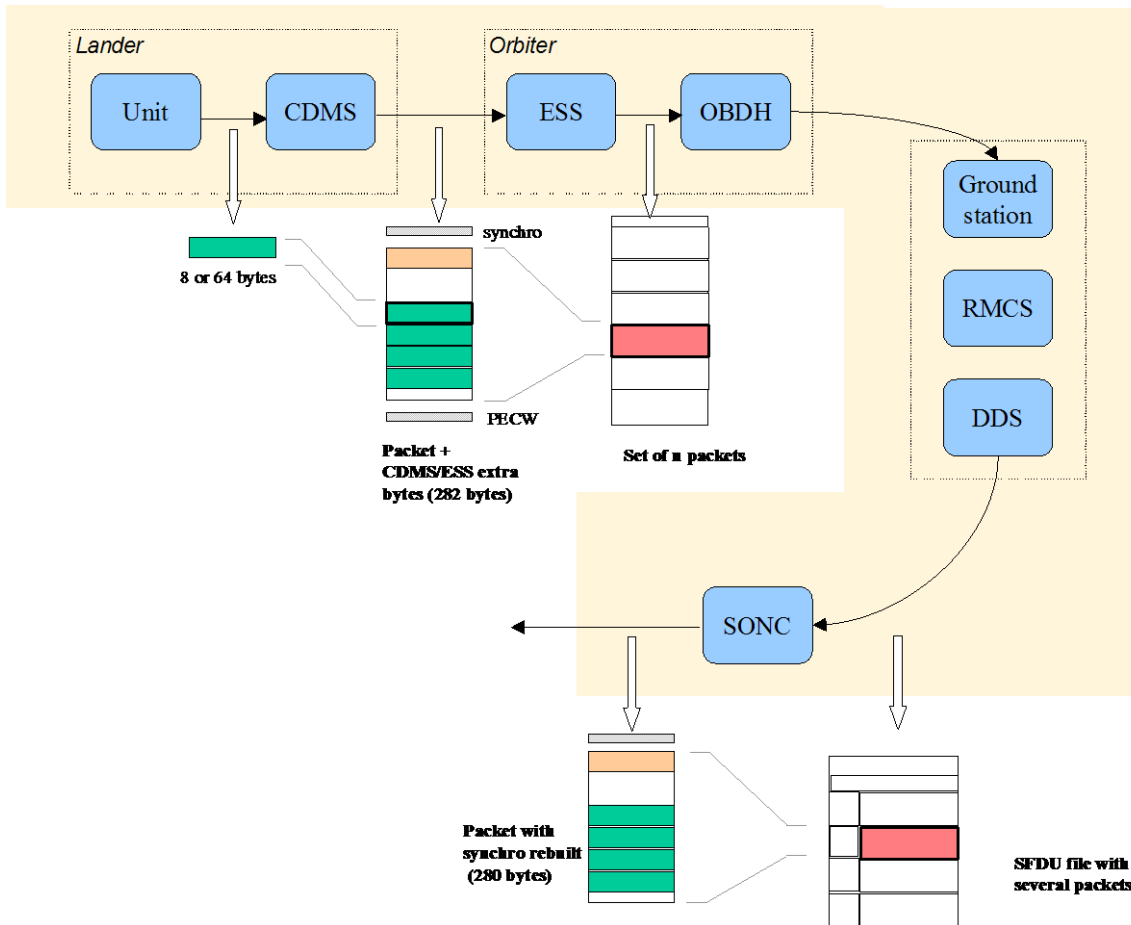


Figure 2 On board data flow

- ◆ Afterwards, SONC processes science raw packets in order to recompose the science measurement (e.g. an image, a spectrum, ...).

Figure 2 gives an overview of this data flow.

The following principles are applied :

- the packet wrapping is removed, and science frames that had to be split into several raw data packets are rebuilt. Basic error detection controls are applied, to recover from possible problems in the transmission chain.
- the Lander On-Board time (LOBT) (synchronised with OOBT) extracted from the packet, and corresponding UTC time are added.
- UTC time is calculated from the On-Board time taking into account the On-Board clock drift as following :

$$\text{UTC (seconds since 01/01/1970)} = \text{LOBT(seconds)} * \text{Gradient} + \text{Offset}$$
 (these coefficients are extracted from TCP packets delivered by DDS).
 LOBT is either the LOBT extracted from CDMS header or the Experiment internal clock when it exists (CIVA, COSAC, PTOLEMY, ROMAP, ROLIS, SESAME). In the last case, it must be taken into account that the Internal clock (32 bits) resets all 4 years, 4 months, 3 days (first reset : 03/04/2007 10 :42 :07).

UTC time-stamped Science and HK data are available in the SONC database and used to generate PDS format.

3.2.2.2 COSAC Time standards

The time standards used in the COSAC data products are :

- the COSAC on-board time,
- the Lander on-board time,
- the DDS header time correlated,
- the UTC.

3.2.2.2.1 The COSAC On-Board Time

The LOBT is the only time available to the instrument during operation. CDMS broadcasts the timing information to enabled units via the SSIF. The update interval varies according to the mode CDMS is currently operating in (either 1 or 32 sec). A copy of the current LOBT is used to time stamp COSAC HK packets to allow for synchronisation with generated SC data.

COBT

A new version (V1.8) of COSAC flight software was uploaded on 23 September 2009 at 22h00 UTC. As the timing information broadcasted by CDMS does not provide the adequate resolution to time tag science data taken with the new measurement routines (v1.8), a new time base was introduced: COBT, Cosac On-Board Time. COBT starts from '0' the moment the SW is handed over control from the debug monitor and provides a resolution of 1 ms. COBT replaces LOBT as the timing information in all science data structures. More information on COBT can be found in [AD 10].

3.2.2.2.2 The Lander On-Board Time (LOBT)

The instruments on board the spacecraft (Orbiter) generate telemetry source packets with an OOBT (orbiter on board time) time stamp in the header.

The OOBT written into the packet header specifies the time, when CDMS can complete a packet.

In terms of HK packets this is the time of the last HK word. Using the HK scanning rate, which is given in word #9 of the packet, one can calculate the OBT of every individual word in this packet. Note that this is only valid if packets with SID (word #9) 1 or 2 are generated. Packets with SID 4 and 5 are "snapshots", which means you can apply the packet OOBT for every word in this packet. SID 3 packets have to be analysed case by case.

In terms of SC packets this is the reception of the last 32 word block by CDMS, which also completes the SC packet. How often 32 word blocks are created (and sent) by the unit, and corresponding to this the delta time between each block, might be different for each unit. So, re-calculation of OOBT for SC words depends on this unit feature.

The Orbiter On-Board Time (OOBT) is a linear binary counter having a resolution of 1/65536 sec stored in 3 16-bit words.

The Lander On-Board Time (LOBT) is a linear binary counter having a resolution of 1/32 sec, kept in 37 bits. Only the 32 least significant bits are distributed to the instruments, in 2 16-bit words. The 5 most significant bits are supposed constant during most of the mission, they are available through a specific service.

The LOBT is derived from the Orbiter On-Board Time (OOBT) : the 11 least significant bits of the OOBT are discarded to obtain the LOBT, hence the reduced resolution. A re-synchronization between OOBT and LOBT is performed regularly (see AD 4).

The Lander is synchronized prior to Separation and during every RF link after landing. So, during descent and the First Science Sequence this should not be a problem, since LOBT keeps synchronized as long as the Lander is powered.

Technical details about synchronisation of Lander On-board Time can be found in § 2.3.2.6 AD 4 of "Command and Data Management System (CDMS) Subsystem Specification 29/08/2001, Issue 3, Rev. 5, **RO-LCD-SP-3101**" (AD 4).

For a description of time handling in the Rosetta project see AD 6 (Rosetta Time handling **RO-EST-TN-3165**, issue 1 rev 0, February 9, 2004).

For a description of Lander on board time handling see AD 4 (Command and Data Management System (CDMS) Subsystem Specification 29/08/2001, Issue 3, Rev. 5 **RO-LCD-SP-3101**) :

§ 2.3.2.6 Synchronisation and Adjustment of Lander On-board Time

§ 2.3.2.6.1 Absolute vs. relative time references

§ 2.3.2.6.2 On-board Time Failure Modes and Recovery Procedures

and AD 5 (Command and Data Management System (CDMS) Operation Manual 12/02/2001, Issue 1, Rev. 2 **RO-LCD-SW-3402**) : § 6. About Lander On-board Time.

3.2.2.2.3 The DDS header time correlated

The OOBT is converted to UTC (Coordinated Universal Time) by means of time correlation and included in the additional DDS packet header when the packets are distributed via the DDS server.

The **DDS header time correlated** (SCET field in the DDS header) is the UTC of the start of measurement derived from the OOBT by time correlation.

Its format is the Sun Modified Julian Time (MJT) i.e. two 32 bit integers. The first (MSB) contains the number of seconds since 00:00:00 on 1st January 1970 and the second (LSB) integer the number of microseconds from seconds in the first field.

Time correlation is described in AD 7 (Data Delivery Interface Document RO-ESC-IF-5003 Issue B6 23/10/2003 Appendix 18 § 18.1.2.1)

3.2.2.2.4 The UTC (Universal Time Coordinated)

The **UTC** is used as a time stamp for SC and HK COSAC data products (from level 2 to level 3).

Spectrum UTC is calculated from the internal on-board time taking into account the drift and reset clock. See [AD 6] for more details.

3.2.2.2.5 Spacecraft Clock Count in PDS Labels

The PDS keywords SPACECRAFT_CLOCK_START_COUNT and SPACECRAFT_CLOCK_STOP_COUNT refer to LOBT.

The LOBT is represented in the following format:

SPACECRAFT_CLOCK_START/STOP_COUNT = "<reset number>/<unit seconds>.<fractional seconds>"

The unit seconds and the fractional seconds are separated by the full stop character. **Note that this is not a decimal point.** The fractional seconds are expressed as multiples of $2^{-5} = 0,03125$. seconds and count from 0 to $2^5 - 1 = 31$. E.g. in SPACECRAFT_CLOCK_START_COUNT = "3/356281394.21" the 21 fractional seconds correspond to $21 \times 2^{-5} = 0.65625$ decimal seconds.

The reset number is an integer starting at 1, i.e. "1/" means LOBT = 0 at 2003-01-01T00:00:00 UTC.

3.2.3 Reference Systems

Reference systems is not relevant for COSAC data experiment.

3.3 Data Validation

COSAC data products are delivered to PSA by SONC. The level 3 SC and HK data produced by SONC are validated by COSAC PI. These data are also distributed via the W3-SONC server and used by all Lander experiment teams.

3.3.1 Data Quality ID

The values of the DATA_QUALITY_ID for CODMAC level 1 (raw telemetry data) data:

-1 not assessed
 0 data complete
 1 <5% missing packets
 2 >5%, <10% missing data
 3 >10%, <20% missing data
 4 >20% missing data

The values of the DATA_QUALITY_ID for CODMAC levels 2 and 3 MS data:

-1 not assessed
 0 full spectrum
 1 incomplete spectrum
 2 empty spectrum
 3 N/A
 4 N/A

The values of the DATA_QUALITY_ID for CODMAC level 2 and 3 GC data:

-1 not assessed
 0 full chromatogram
 1 off scale (0x0000 values)
 2 off scale (0x0FFF values)
 3 N/A
 4 N/A

3.4 Content

3.4.1 Volume Set

One volume corresponds to one data set. The possible values of VOLUME keywords can be found in [AD 12]. The volume keyword values for the Commissioning mission phase are given in the following example.

```
VOLUME_NAME           = "COSAC RAW DATA FOR THE
                        COMMISSIONING PHASE"
VOLUME_SERIES_NAME    = "ROSETTA SCIENCE ARCHIVE"
VOLUME_SET_ID         = "DE MPG MPS RLCOS 10XX"
VOLUME_SET_NAME       = "ROSETTA COSAC DATA"
VOLUME_ID             = "RLCOS2_1013"
VOLUME_VERSION_ID     = "VERSION 1"
VOLUME_FORMAT         = "ISO-9660"
MEDIUM_TYPE          = "ONLINE"
VOLUMES               = 36
PUBLICATION_DATE      = 2006-11-13
DESCRIPTION            = " This volume contains data
                        and supporting documentation
                        from the Rosetta Commissioning
                        mission phase "
```

3.4.2 Data Set

The COSAC data is archived in as many Data Sets as simple mission phase and level data processing.

| Name element | Data Set ID | Data Set Name |
|--|---|----------------|
| INSTRUMENT_HOST_ID / INSTRUMENT_HOST_NAME | RL (Rosetta Lander) | ROSETTA-LANDER |
| Target id / target name | See AD 12 | in AD 12 |
| INSTRUMENT_NAME | COSAC - COMETARY SAMPLING AND COMPOSITION EXPERIMENT | |
| INSTRUMENT_ID | COSAC | |
| Data processing level number | * Level 1 contains level 1 SC and HK. * Level 2 contains level 2 SC. * Level 3 is contains level 3 SC and level 3 HK Remark : all are delivered directly after the end of the proprietary period | |
| mission phase abbreviation | See AD 12 | |
| description | N/A | N/A. |
| version | The first version of a data set is V1.0 | |

3.4.3 Directories

The COSAC archive have the following directory structure :

```

|-root directory----- |
                          | -AAREADME.TXT
                          | -CATALOG-
                          | -DATA---- (contains Level 1 data files, HK and SC mixed)
                          |
                          | -DOCUMENT-
                          | -EXTRAS-
                          | -INDEX-
                          | -VOLDESC.CAT
                          |
                          | -AAREADME.TXT
                          | -BROWSE-
                          | -CATALOG-
                          |
                          | -DATA----- (contains Level 2 SC data files)
|-root directory----- |
                          | -DOCUMENT-
                          | -INDEX-
                          | -LABEL-
                          | -VOLDESC.CAT
                          |
                          | -AAREADME.TXT
                          | -BROWSE-
                          | -CATALOG-
                          |

```



```

|-root directory----- | -DATA----- (contains Level 3 HK, SC, data files)
                          |
                          | -DOCUMENT-
                          | -INDEX-
                          | -LABEL-
                          | -VOLDESC.CAT
  
```

The BROWSE and LABEL directories are not present in the level 1 data set.

3.4.3.1 Root Directory

The root directory of COSAC contains the following files :

| File Name | Contents |
|--------------|--|
| AAREADME.TXT | Volume content and format information |
| VOLDESC.CAT | A description of the contents of this volume in PDS format readable by both humans and computers |

The name of the root directory is the data set ID.

3.4.3.2 Calibration Directory

Calibration information can be found in the file COSAC_CALIBRATION_DESC.TXT located in the DOCUMENT directory.

3.4.3.3 Catalog Directory

The catalog directory provides a top level understanding of the mission, spacecraft, instruments and data sets. The catalog directory contains the following files:

| File Name | Contents |
|--------------|---|
| CATINFO.TXT | A description of the contents of the catalog directory |
| DATASET.CAT | Data set information |
| INST.CAT | Instrument information |
| INSTHOST.CAT | Instrument host (spacecraft) information |
| MISSION.CAT | Mission information |
| PERSON.CAT | PDS personnel catalog information about the instrument team responsible for generating the data products. There is one file for each instrument team providing data to this data set. |
| REF.CAT | Full citations for references mentioned in any and all of the catalog files, or in any associated label files |
| SOFTWARE.CAT | Information about the software included in the SOFTWARE directory |

3.4.3.4 Index Directory

The index directory contains the indices for all data products on the data set. The following files are included in the index directory :

3.4.3.4.1 Dataset Index File

| File Name | Contents |
|------------------|--|
| BROWSE_INDEX.LBL | PDS label for the BROWSE index file BROWSE_INDEX.TAB |
| BROWSE_INDEX.TAB | Index of the BROWSE directory |
| INDEX.LBL | PDS label for the volume index file, INDEX.TAB |
| INDEX.TAB | Volume index in tabular format |
| INDXINFO.TXT | A description of the contents of the Index Directory |

3.4.3.5 Browse Directory and Browse Files

The Browse Directory contains quick looks, chromatograms and mass spectra as PNG files corresponding to the edited and calibrated SC data in the DATA directory.

For file naming convention see § 3.1.4.

3.4.3.6 Software Directory

The EGSE software is used to read raw telemetry data (CDMS rolbin files). As it does not comply with PDS strong requirements on software for long term archiving, it is instead located in the EXTRAS directory.

3.4.3.7 Label Directory

The label directory contains include files referenced by data files on the data set, e.g. FMT files containing label definitions used in data label files. The following files are contained in the Label directory.

| File Name | Contents |
|-------------------------------|--|
| LABINFO.TXT | A description of the contents of the LABEL directory |
| COSAC_ADC_GC.FMT | The description of the table object for Analog GC housekeeping values; valid for flight software version previous to 1.8. |
| COSAC_ADC_MS.FMT | The description of the table object for Analog MS housekeeping values; valid for flight software version previous to 1.8. |
| COSAC_CONFIG.FMT | The description of the table object for COSAC Configuration data (tapping Station, MS and GC) and device and experiment parameters (MS and GC). |
| COSAC_CONFIG_FM1_8.FMT | The description of the table object for COSAC Configuration data (tapping Station, MS and GC) and device and experiment parameters (MS and GC); valid for flight software version previous to 1.8. |
| COSAC_FULL_HK_SC.FMT | The description of the table object for the complete set of COSAC housekeeping values; valid for flight software version previous to 1.8. |
| COSAC_CALIBRATED_HK.FMT | The description of the table object for the COSAC calibrated (level 3) housekeeping data. |
| COSAC_GC_SPECTRUM_2.FMT | The description of the table object for GC science data, CODMAC level 2; valid for flight software version previous to 1.8. |
| COSAC_GC_SPECTRUM_2_FM1_8.FMT | The description of the table object for GC science |

| | |
|-------------------------------|--|
| | data, CODMAC level 2 and flight software version 1.8. |
| COSAC_GC_SPECTRUM_3.FMT | The description of the table object for GC science data, CODMAC level 3; valid for flight software version previous to 1.8. |
| COSAC_GC_SPECTRUM_3_FM1_8.FMT | The description of the table object for GC science data, CODMAC level 3 and flight software version 1.8. |
| COSAC_HK_BURST.FMT | The description of the table object for COSAC housekeeping data valid for flight software version 1.8. This structure replaces the ADC_GC and ADC_MS structures from the previous flight software version. |
| COSAC_MS_SPECTRUM_2.FMT | The description of the table object for MS science data, CODMAC level 2; valid for flight software version previous to 1.8. |
| COSAC_MS_SPECTRUM_2_FM1_8.FMT | The description of the table object for MS science data, CODMAC level 2 and flight software version 1.8. |
| COSAC_MS_SPECTRUM_3.FMT | The description of the table object for MS science data, CODMAC level 3; valid for flight software version previous to 1.8. |
| COSAC_MS_SPECTRUM_3_FM1_8.FMT | The description of the table object for MS science data, CODMAC level 3 and flight software version 1.8. |
| COSAC_TIME_ID.FMT | The description of the table object for timing information valid for flight software version previous to 1.8. |

3.4.3.8 Document Directory

This directory contains documentation to help the user to understand and use the archive data. The following files are contained in the document directory:

| File Name | Contents |
|----------------------------|---|
| DOCINFO.TXT | A description of the contents of this directory |
| RO-LCO-IF-340001.PDF | COSAC Software Interface Description |
| RO-LCO-IF-340001.LBL | PDS label for file RO-LCO-IF-340001.PDF |
| EAICD_COSAC.PDF | This document |
| EAICD_COSAC.LBL | PDS label for file EAICD_COSAC.PDF |
| COSAC.LBL | PDS label for file COSAC.PDF |
| COSAC.PDF | Description of the COSAC experiment |
| COSAC_CALIBRATION_DESC.LBL | PDS label for file COSAC_CALIBRATION_DESC.ASC |
| COSAC_CALIBRATION_DESC.ASC | Calibration information for COSAC calibrated data |
| COSAC_LOGBOOK_001.LBL | PDS label for file COSAC_LOGBOOK_001.ASC |
| COSAC_LOGBOOK_001.ASC | COSAC operation logbook |
| TIMELINE_ph.TXT | Timeline Ascii file with the PDS label attached for phase <i>ph</i> |
| TIMELINE_ph_DESC.TXT | Description of the timeline file for phase <i>ph</i> |
| TIMELINE_ph.PNG | Timeline Image file for phase <i>ph</i> |
| TIMELINE_ph.LBL | PDS label for image TIMELINE_ph.PNG |

3.4.3.9 Extras Directory

The Extras directory contains EGSE software to read and visualize raw telemetry data (CDMS rolbin files, CODMAC level 1). The contents of the EXTRAS directory are shown below :

```
| -EXTRAS----- | -COSAC_EGSE--- | -EGSE.EXE
|                 |                 |
|                 |                 | -EXTRINFO.TXT
```

The EGSE Directory contains the following files :

| File Name | Contents |
|--------------|--|
| EGSE.EXE | EGSE software (PC, MS Windows executable) for extracting data from the raw data product files (rolbin), calibration and visualisation. |
| EGSE.LBL | PDS label for file EGSE.EXE |
| EXTRINFO.TXT | A description of the contents of the Extras Directory |

3.4.3.10 Data Directory

The structure and naming scheme of the data directory is described in chapter 3.1.3.

4 Detailed Interface Specifications

4.1 Structure and Organization Overview

The data files are archived in a data set on the basis of the mission phase relative to the production of the data.

Each .ROL (rolbin) file containing the raw data (telemetry packets, CODMAC level 1) is placed in the DATA directory of the corresponding dataset (with level 1 data files, HK and SC mixed).

Each .TAB file containing uncalibrated SC data (CODMAC level 2) is archived in the DATA directory of the corresponding dataset (with level 2 SC data files).

Each .TAB file containing calibrated SC data (CODMAC level 3) and each .CSV file containing calibrated HK (CODMAC level 3) data is archived in the DATA directory of the corresponding datasets (with level 3 HK data files and level 3 SC data files).

The file names follows the rules explained in this document (§3.1.4).

4.2 Data Sets, Definition and Content

The following table gives the definition of the name and id of the foreseen data sets :

| Data Set ID | Data Set Name |
|-------------------------|-------------------------------------|
| RL-CAL-COSAC-1-CVP-V1.0 | ROSETTA-LANDER CAL COSAC 1 CVP V1.0 |

| | |
|--------------------------|--|
| RL-CAL-COSAC-1-CR2-V1.0 | ROSETTA-LANDER CAL COSAC 1 CR2 V1.0 |
| RL-CAL-COSAC-1-CR4A-V1.0 | ROSETTA-LANDER CAL COSAC 1 CR4A V1.0 |
| RL-CAL-COSAC-1-CR4B-V1.0 | ROSETTA-LANDER CAL COSAC 1 CR4B V1.0 |
| RL-CAL-COSAC-1-CR5-V1.0 | ROSETTA-LANDER CAL COSAC 1 CR5 V1.0 |
| RL-E-COSAC-1-EAR1-V1.0 | ROSETTA-LANDER EARTH COSAC 1 EAR1 V1.0 |
| RL-E-COSAC-1-EAR2-V1.0 | ROSETTA-LANDER EARTH COSAC 1 EAR2 V1.0 |
| RL-E-COSAC-1-EAR3-V1.0 | ROSETTA-LANDER EARTH COSAC 1 EAR3 V1.0 |
| RL-M-COSAC-1-MARS-V1.0 | ROSETTA-LANDER MARS COSAC 1 MARS V1.0 |
| RL-A-COSAC-1-AST2-V1.0 | ROSETTA-LANDER LUTETIA COSAC 1 AST2 V1.0 |
| RL-CAL-COSAC-1-PHC-V1.0 | ROSETTA-LANDER 67P COSAC 1 PHC V1.0 |
| RL-CAL-COSAC-1-PDCS-V1.0 | ROSETTA-LANDER 67P COSAC 1 PDCS V1.0 |
| RL-C-COSAC-1-RBD-V1.0 | ROSETTA-LANDER 67P COSAC 1 RBD V1.0 |
| RL-C-COSAC-1-FSS-V1.0 | ROSETTA-LANDER 67P COSAC 1 FSS V1.0 |
| | |
| RL-CAL-COSAC-2-CVP-V1.0 | ROSETTA-LANDER CAL COSAC 2 CVP V1.0 |
| RL-CAL-COSAC-2-CR2-V1.0 | ROSETTA-LANDER CAL COSAC 2 CR2 V1.0 |
| RL-CAL-COSAC-2-CR4A-V1.0 | ROSETTA-LANDER CAL COSAC 2 CR4A V1.0 |
| RL-CAL-COSAC-2-CR4B-V1.0 | ROSETTA-LANDER CAL COSAC 2 CR4B V1.0 |
| RL-E-COSAC-2-EAR1-V1.0 | ROSETTA-LANDER EARTH COSAC 2 EAR1 V1.0 |
| RL-E-COSAC-2-EAR2-V1.0 | ROSETTA-LANDER EARTH COSAC 2 EAR2 V1.0 |
| RL-E-COSAC-2-EAR3-V1.0 | ROSETTA-LANDER EARTH COSAC 2 EAR3 V1.0 |
| RL-M-COSAC-2-MARS-V1.0 | ROSETTA-LANDER MARS COSAC 2 MARS V1.0 |
| RL-A-COSAC-2-AST2-V1.0 | ROSETTA-LANDER LUTETIA COSAC 2 AST2 V1.0 |
| RL-CAL-COSAC-2-PHC-V1.0 | ROSETTA-LANDER 67P COSAC 2 PHC V1.0 |
| RL-CAL-COSAC-2-PDCS-V1.0 | ROSETTA-LANDER 67P COSAC 2 PDCS V1.0 |
| RL-C-COSAC-2-RBD-V1.0 | ROSETTA-LANDER 67P COSAC 2 RBD V1.0 |
| RL-C-COSAC-2-FSS-V1.0 | ROSETTA-LANDER 67P COSAC 2 FSS V1.0 |
| | |
| RL-CAL-COSAC-3-CVP-V1.0 | ROSETTA-LANDER CAL COSAC 3 CVP V1.0 |
| RL-CAL-COSAC-3-CR2-V1.0 | ROSETTA-LANDER CAL COSAC 3 CR2 V1.0 |
| RL-CAL-COSAC-3-CR4A-V1.0 | ROSETTA-LANDER CAL COSAC 3 CR4A V1.0 |
| RL-CAL-COSAC-3-CR4B-V1.0 | ROSETTA-LANDER CAL COSAC 3 CR4B V1.0 |
| RL-E-COSAC-3-EAR1-V1.0 | ROSETTA-LANDER EARTH COSAC 3 EAR1 V1.0 |
| RL-E-COSAC-3-EAR2-V1.0 | ROSETTA-LANDER EARTH COSAC 3 EAR2 V1.0 |
| RL-E-COSAC-3-EAR3-V1.0 | ROSETTA-LANDER EARTH COSAC 3 EAR3 V1.0 |
| RL-M-COSAC-3-MARS-V1.0 | ROSETTA-LANDER MARS COSAC 3 MARS V1.0 |
| RL-A-COSAC-3-AST2-V1.0 | ROSETTA-LANDER LUTETIA COSAC 3 AST2 V1.0 |
| RL-CAL-COSAC-3-PHC-V1.0 | ROSETTA-LANDER 67P COSAC 3 PHC V1.0 |
| RL-CAL-COSAC-3-PDCS-V1.0 | ROSETTA-LANDER 67P COSAC 3 PDCS V1.0 |
| RL-C-COSAC-3-RBD-V1.0 | ROSETTA-LANDER 67P COSAC 3 RBD V1.0 |
| RL-C-COSAC-3-FSS-V1.0 | ROSETTA-LANDER 67P COSAC 3 FSS V1.0 |

4.3 Data Product Design

All COSAC data products have PDS detached labels.

4.3.1 Data Product Raw COSAC data (Level 1)

Level 1 contains mixed raw housekeeping and science data packets delivered by the Rosetta Lander with detached PDS labels.

4.3.1.1 File Characteristics Data Elements

The raw files (level 1) are described by PDS minimal detached labels. The file characteristic data elements are RECORD_TYPE, PRODUCT_TYPE and FILE_NAME. The PRODUCT_TYPE is UDR. The

RECORD_TYPE for raw data is UNDEFINED, i.e. the structure of records is not described in the PDS labels since these data are intended to be processed with the EGSE software available in the EXTRAS directory. The file contains telemetry packets which are described in [AD 10].

4.3.1.2 Instrument and Detector Descriptive Data Elements

```

INSTRUMENT_HOST_NAME = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID   = RL
INSTRUMENT_ID        = COSAC
INSTRUMENT_NAME      = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE      = {"GAS CHROMATOGRAPH", "MASS SPECTROMETER"}
INSTRUMENT_MODE_ID   = "N/A"
INSTRUMENT_MODE_DESC = "N/A"

```

4.3.2 Data Product Design of Science Data (Level 2 and 3)

Each COSAC science PDS file contains data from one measurement cycle. There are 3 types of measurements, GC (gas chromatograph), MS (mass spectrum) and combined GC/MS. A measurement cycle always starts with TC_ID tag. The TC_ID tag contains a copy of the complete "start action" TC and indicates the type of measurement and the number of cycles. The structures of COSAC measurements differ according to flight software version. Details can be found in [AD 10] for flight software version 1.8 (uploaded on 23 September 2009 at 22h00 UTC) and in [AD 9] for previous flight software version.

The science data products have different structures according to COSAC flight software version. The following structures are valid for flight software previous to version 1.8 (the "+" indicates that the item can appear several times in the measurement):

GC measurements:

```

- TC /* TC that started the measurement */
- CSIB_CFG /* device configuration */
- CSIB_PAR /* measurement parameters */
- Housekeeping /* complete HK set */
+ ADC_GC(1), ..., ADC_GC(n) /* ADC HK readout */
+ GC data * n /* GC spectrogram: time series, depends on number of
cycles performed */

```

MS measurements:

```

- TC /* TC that started the measurement */
- CSIB_CFG /* device configuration */
- CSIB_PAR /* measurement parameters */
- Housekeeping /* complete HK set */
+ TIME /* LOBT, time when measurement was started */
+ ADC_MS(1), ..., ADC_MS(n) /* ADC HK readout */
+ MS data * n /* Mass spectrum: time series, depends on number of
cycles performed */

```

Combined GC/MS measurements:

```

- TC /* TC that started the measurement */
- CSIB_CFG /* device configuration */
- CSIB_PAR /* measurement parameters */
- Housekeeping /* complete HK set */
- ADC_GC /* ADC GC HK readout */
+ TIME /* LOBT, time when measurement was started */
+ ADC_MS(1), ..., ADC_MS(m)
+ MS data(1), ..., MS data(n) /* set of MS spectra: time series */
+ GC data /* GC spectrogram: time series */

```

There are 9 possible structures for COSAC measurements, 3 for MS, 2 for GC and 4 for GC/MS.

MS :

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_MS_ID]? ([TIME_ID][ADC_MS_ID]*[MS_ID]?) {n}

Hk Sweeping = false for MS in CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID] ([TIME_ID][MS_ID]?) {n}

Accumulate = true for MS in CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_MS_ID]? ([TIME_ID][ADC_MS_ID]*) {n} [MS_ID]

GC :

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_GC_ID]* ([ADC_GC_ID]*[GC_ID]?) {n}

Hk Sweeping = false for GC in CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID] ([GC_ID]?) {n}

GCMS :

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_GC_ID]*[ADC_MS_ID]?
 ([ADC_GC_ID][TIME_ID][ADC_MS_ID]*[MS_ID]) {k} [GC_ID]

Hk Sweeping = False for MS and False for GC in CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID] ([ADC_GC_ID][TIME_ID][MS_ID]) {k} [GC_ID]

Hk Sweeping = True for MS and False for GC CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_MS_ID]
 ([ADC_GC_ID][TIME_ID][ADC_MS_ID]*[MS_ID]) {k} [GC_ID]

Hk Sweeping = False for MS and True for GC in CSIB_CFG

[TC_ID][CSIB_CFG_ID][CSIB_PAR_ID][HK_ID][ADC_GC_ID]* ([ADC_GC_ID][TIME_ID][MS_ID]) {k}
 [GC_ID]

where

* : the asterisk indicates that the previous tag must be present 0, 1, or several times

? : the question mark indicates that the previous tag must be present at most 1 time

{n} : number of measurement cycles (from [TC_ID] tag)

{k} : for GC/MS measurement only, represents the number of MS spectra in the measurement.

Each measurement cycle is described by a "combined detached label" (.LBL) containing pointers to corresponding data files (.TAB). The CONFIG table (*_CONF.TAB) contains data from TC_ID, CSIB_CFG_ID and CSIB_PAR_ID tags.

Examples:

GC measurement:

COS_FGCS2_070925010423_0000.LBL
 COS_FGCS2_070925010423_CONF.TAB
 COS_FGCS2_070925010423_HKID.TAB
 COS_FGCS2_070925010423_ADGC.TAB
 COS_FGCS2_070925010423_GCID.TAB

MS measurement:

COS_FMSS2_041006190521_0000.LBL
COS_FMSS2_041006190521_CONF.TAB
COS_FMSS2_041006190521_HKID.TAB
COS_FMSS2_041006190521_TIME.TAB
COS_FMSS2_041006190521_ADCM.TAB
COS_FMSS2_041006190521_MSID.TAB

Combined GC/MS measurement:

COS_FGMS2_041006193328_0004.LBL
COS_FGMS2_041006193328_CONF.TAB
COS_FGMS2_041006193328_HKID.TAB
COS_FGMS2_041006193328_ADGC.TAB
COS_FGMS2_041006193328_TIME.TAB
COS_FGMS2_041006193328_MSID.TAB
COS_FGMS2_041006193328_ADCM.TAB
COS_FGMS2_041006193328_GCID.TAB

The level 3 PDS labels are similar to level 2 labels.

With flight software version 1.8 new tags were introduced and consequently new structures were added for the data products. The new tags are the following:

- SD_VERSION_ID; science data stream version ID (i.e. flight software version)
- TIMEREF_ID; used to synchronize LOBT and COBT. COBT is the Cosac On-Board Time with a resolution of 1ms (see §3.2.2.2.1).
- HKBURST_ID; this structure replaces the deprecated 'ADC_MS' and 'ADC_GC' structures.

At the same time the following tags were removed:

- ADC_MS_ID and ADC_GC_ID (replaced by HKBURST_ID)
- TIME_ID (the timing information is stored inside 'GC' or 'MS' tags)

Examples of new data products including the new tags (in blue) :

GC measurement:

COS_FGCS2_070925010423_0000.LBL
COS_FGCS2_070925010423_CONF.TAB ([SD_VERSION_ID](#), [TIMEREF_ID](#), [TC_ID](#),
[CSIB_CFG_ID](#), [CSIB_PAR_ID](#))
COS_FGCS2_070925010423_HKID.TAB
[COS_FGCS2_070925010423_HB.TAB](#) ([HKBURST_ID](#))
COS_FGCS2_070925010423_GCID.TAB

MS measurement:

COS_FMSS2_041006190521_0000.LBL
COS_FMSS2_041006190521_CONF.TAB ([SD_VERSION_ID](#), [TIMEREF_ID](#), [TC_ID](#),
[CSIB_CFG_ID](#), [CSIB_PAR_ID](#))
COS_FMSS2_041006190521_HKID.TAB
[COS_FMSS2_041006190521_HB.TAB](#) ([HKBURST_ID](#))
COS_FMSS2_041006190521_MSID.TAB

Combined GC/MS measurement:

COS_FGMS2_041006193328_0004.LBL

COS_FGMS2_041006193328_CONF.TAB ([SD_VERSION_ID](#), [TIMEREF_ID](#), TC_ID,
 CSIB_CFG_ID, CSIB_PAR_ID)
 COS_FGMS2_041006193328_HKID.TAB
[COS_FGMS2_041006193328_HB.TAB](#) ([HKBURST_ID](#))
 COS_FGMS2_041006193328_MSID.TAB
 COS_FGMS2_041006193328_GCID.TAB

4.3.2.1 File Characteristics Data Elements

The PDS file characteristic data elements for COSAC science data (level 2 and 3) are:

```

RECORD_TYPE      =  FIXED_LENGTH
FILE_RECORDS
PROCESSING_LEVEL_ID
  
```

4.3.2.2 Data Object Pointers Identification Data Elements

The COSAC SC data are organized as ASCII tables. The data object pointers (^TABLE) reference TAB files.

4.3.2.3 Data Object Definition

Each label (LBL) contains several tables. The number of tables is variable and depends on the type of measurement, of the number of spectra and of the flight software version. Nevertheless there are several tags that are common to all COSAC measurements: CONFIG, FULL_HK_ID and TIME_ID (except for GC measurement which do not have TIME_ID tag, the time being inside the GC spectrum). For flight software version 1.8 we can add HKBURST_ID and remove the TIME_ID. We first define the TABLE object corresponding to the common tags and following in separate chapters the specific object to GC, MS and GC/MS measurements.

4.3.2.3.1 The description of the CONFIG table.

The CONFIG table contains data from TC_ID, CSIB_CFG_ID and CSIB_PAR_ID tags for flight software version previous to 1.8 and from SD_VERSION_ID, TIMEREF_ID, TC_ID, CSIB_CFG_ID, CSIB_PAR_ID tags for version 1.8.

Flight software version previous to 1.8

```

OBJECT           =  COSAC_CONFIG_TABLE
NAME             =  CONFIG
INTERCHANGE_FORMAT =  ASCII
ROWS            =
^STRUCTURE      =  "COSAC_CONFIG.FMT"
COLUMNS        =  82
ROW_BYTES       =
END_OBJECT      =  COSAC_CONFIG_TABLE
  
```

Flight software version 1.8

```

OBJECT           =  COSAC_CONFIG_TABLE
NAME             =  CONFIG
INTERCHANGE_FORMAT =  ASCII
ROWS            =
^STRUCTURE      =  "COSAC_CONFIG_FM1_8.FMT"
COLUMNS        =  84
  
```

```

    ROW_BYTES          =
  END_OBJECT          = COSAC_CONFIG_TABLE
  
```

The structure of the TABLE object is described in the file COSAC_CONFIG.FMT as follows:

```

/*          Contents of format file  "COSAC_CONFIG.FMT"          */
/* TC */

OBJECT      = COLUMN
  NAME      = "TC_DATA"
  DATA_TYPE = CHARACTER
  START_BYTE = 2
  BYTES     = 39
  DESCRIPTION = "TC data words in hexadecimal format"
  END_OBJECT = COLUMN

/* CSIB_CFG */
/* Configuration data for tapping Station, MS and GC          */

/* ----- Configuration data for Tapping Station (30 words) ----- */

OBJECT      = COLUMN
  NAME      = "TPST_DIR_CONTRL"
  DATA_TYPE = CHARACTER
  START_BYTE = 44
  BYTES     = 8
  UNIT      = "N/A"
  DESCRIPTION = "TPST: Direct controlling,
                Possible values :
                  disabled
                  enabled"
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  NAME      = "TPST_POS_INFO"
  DATA_TYPE = CHARACTER
  START_BYTE = 55
  BYTES     = 4
  UNIT      = "N/A"
  DESCRIPTION = "(Hexadecimal Format) TPST: Position information
                0x0000 = LUT , 0xffff = Value"
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  NAME      = "TPST_POS_ID"
  DATA_TYPE = CHARACTER
  START_BYTE = 62
  BYTES     = 20
  UNIT      = "N/A"
  DESCRIPTION = " TPST: Position ID
                Possible values :
                  Open
                  Contacts closed
                  Main Terminal closed
                  Side Terminal closed
                  Upper position
                  Lower position"
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  
```

NAME = "TPST_POS_VALUE"
 DATA_TYPE = CHARACTER
 START_BYTE = 85
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) TPST: Position value,
 potentiometer value"

END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TPST_DIRECTION"
 DATA_TYPE = CHARACTER
 START_BYTE = 92
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) TPST: Direction
 CS1.D7 = 0000
 CS1.D7 = ffff"

END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TPST_TIME_TO_DRIVE"
 DATA_TYPE = CHARACTER
 START_BYTE = 99
 BYTES = 4
 UNIT = SECOND
 DESCRIPTION = "(Hexadecimal Format) TPST: Time to drive (sec)"

END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TPST_START_CAL"
 DATA_TYPE = CHARACTER
 START_BYTE = 106
 BYTES = 5
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) TPST: Start calibration
 Possible values :
 False
 True"

END_OBJECT = COLUMN

/* ----- Configuration data for MS (30 words) ----- */

OBJECT = COLUMN
 NAME = "MS_HK_SWEEPING"
 DATA_TYPE = CHARACTER
 START_BYTE = 114
 BYTES = 3
 UNIT = "N/A"
 DESCRIPTION = "MS: HK sweeping
 Possible values :
 yes
 no"

END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_ACCUMULATE"
 DATA_TYPE = CHARACTER
 START_BYTE = 120
 BYTES = 3

UNIT = "N/A"
DESCRIPTION = "MS: Accumulate parameter ; possible values :
 yes
 no"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_CATHODE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 125
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "MS: Cathode number to be selected"
FORMAT = I1
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_EMI_CURRENT"
DATA_TYPE = CHARACTER
START_BYTE = 128
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Emission current"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_DET_VOLT"
DATA_TYPE = CHARACTER
START_BYTE = 135
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Detector voltage"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_RESOL"
DATA_TYPE = CHARACTER
START_BYTE = 142
BYTES = 4
UNIT = "N/A"
DESCRIPTION = " MS: Resolution possible values :
 low
 high "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_FREQUENCY"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 148
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "MS: Frequency"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_RUN_CAL"
DATA_TYPE = CHARACTER
START_BYTE = 158
BYTES = 5
UNIT = "N/A"

DESCRIPTION = "MS: Run calibration
Possible values :
False
True"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_SNIFFING_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 166
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "MS: Sniffing mode
Possible values :
disabled
enabled"
END_OBJECT = COLUMN

/* ----- Configuration data for GC (30 words) ----- */

OBJECT = COLUMN
NAME = "GC_HK_SWEEPING"
DATA_TYPE = CHARACTER
START_BYTE = 177
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "GC: HK sweeping
Possible values :
yes
no"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CONTINUE_FLAG"
DATA_TYPE = CHARACTER
START_BYTE = 183
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "GC: continue flag ; Possible values :
False
True"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_DUR_MEASURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 190
BYTES = 2
UNIT = "N/A"
FORMAT = I2
DESCRIPTION = "GC: Duration of measurement
This is an index pointing into a look-up table
holding the following values:
1 : 1,12 min
2 : 2,23 min
4 : 4,47 min
8 : 8,95 min
16 : 17,89 min

Note that any combination of the above values is possible!

01010 : 8,95 + 2,23 min

10101 : 17,89 + 4,47 + 1,12 min"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_HELIUM_TANK"
DATA_TYPE = CHARACTER
START_BYTE = 194
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "GC: Helium tank selected
Possible values :
Tank 1
Tank 2"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_DUR_INJEC"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 202
BYTES = 8
UNIT = MILLISECOND
FORMAT = I8
DESCRIPTION = "GC: Duration of injection (msec)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_SAMPLE"
DATA_TYPE = CHARACTER
START_BYTE = 212
BYTES = 15
UNIT = "N/A"
DESCRIPTION = "GC: Sample
Possible values :
Calibration gas
Oven
Tenax"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CHANNEL_1"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 229
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "GC: Column selection for Channel 1
Column #1 0x000i (0 <= i <= 7)
Column #2 0x00i0 (0 <= i <= 7)
Column #3 0x0i00 (0 <= i <= 7)
Column #4 0xi000 (0 <= i <= 7)"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CHANNEL_2"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 231
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "GC: Column selection for Channel 2"

```

          Column #1  0x000i (0 <= i <= 7)
          Column #2  0x00i0 (0 <= i <= 7)
          Column #3  0x0i00 (0 <= i <= 7)
          Column #4  0xi000 (0 <= i <= 7) "
  
```

END_OBJECT = COLUMN

```

OBJECT = COLUMN
NAME = "GC_CHANNEL_3"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 233
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "GC: Column selection for Channel 3
          Column #1  0x000i (0 <= i <= 7)
          Column #2  0x00i0 (0 <= i <= 7)
          Column #3  0x0i00 (0 <= i <= 7)
          Column #4  0xi000 (0 <= i <= 7) "
  
```

END_OBJECT = COLUMN

```

OBJECT = COLUMN
NAME = "GC_CHANNEL_4"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 235
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "GC: Column selection for Channel 4
          Column #1  0x000i (0 <= i <= 7)
          Column #2  0x00i0 (0 <= i <= 7)
          Column #3  0x0i00 (0 <= i <= 7)
          Column #4  0xi000 (0 <= i <= 7) "
  
```

END_OBJECT = COLUMN

```

OBJECT = COLUMN
NAME = "GC_COL_HEAD_PRESS"
DATA_TYPE = CHARACTER
START_BYTE = 238
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) GC: Column head pressure
          0x0000 <= x <= 0x00ff"
  
```

END_OBJECT = COLUMN

```

/* CSIB_PAR */
/*      Device parameters and experiment parameters for MS and GC      */
/*      ----- Device parameters (27 words) ----- */
  
```

```

OBJECT = COLUMN
NAME = "TPST_POS_OPEN"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 244
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Open"
  
```

END_OBJECT = COLUMN

```

OBJECT = COLUMN
NAME = "TPST_POS_CONT_CLOS"
  
```

DATA_TYPE = ASCII_INTEGER
START_BYTE = 253
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Contacts Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_MAIN_TERM_CLOS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 262
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Main Terminal Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_SIDE_TERM_CLOS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 271
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Side Terminal Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_UPPER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 280
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Upper"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_LOWER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 289
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Lower"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_BACKUP_RAM"
DATA_TYPE = CHARACTER
START_BYTE = 299
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "TPST: Use of Backup Ram ; possible values :
 yes
 no"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_IGN_SD2_STAT"


```

DATA_TYPE = CHARACTER
START_BYTE = 305
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "TPST: Ignore SD2 Status ; possible values :
                yes
                no"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_TIMEOUT_VALUE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 310
BYTES = 8
UNIT = "MILLISECOND"
FORMAT = I8
DESCRIPTION = "TPST: Timeout Value"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_CREATE_REPORT"
DATA_TYPE = CHARACTER
START_BYTE = 320
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) TPST: Create Report"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_0"
DATA_TYPE = CHARACTER
START_BYTE = 327
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[0]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_1"
DATA_TYPE = CHARACTER
START_BYTE = 334
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[1]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_2"
DATA_TYPE = CHARACTER
START_BYTE = 341
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[2]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_3"
DATA_TYPE = CHARACTER
START_BYTE = 348
BYTES = 4
UNIT = "N/A"
    
```

DESCRIPTION = "(Hexadecimal Format) Temperature[3]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_4"
DATA_TYPE = CHARACTER
START_BYTE = 355
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[4]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_5"
DATA_TYPE = CHARACTER
START_BYTE = 362
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[5]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_6"
DATA_TYPE = CHARACTER
START_BYTE = 369
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[6]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_7"
DATA_TYPE = CHARACTER
START_BYTE = 376
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[7]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HEATING_TIME_0"
DATA_TYPE = CHARACTER
START_BYTE = 383
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Heating Time[0]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HEATING_TIME_1"
DATA_TYPE = CHARACTER
START_BYTE = 390
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Heating Time[1]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HEATING_TIME_2"
DATA_TYPE = CHARACTER
START_BYTE = 397

BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[2]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_3"
 DATA_TYPE = CHARACTER
 START_BYTE = 404
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[3]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_4"
 DATA_TYPE = CHARACTER
 START_BYTE = 411
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[4]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_5"
 DATA_TYPE = CHARACTER
 START_BYTE = 418
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[5]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_6"
 DATA_TYPE = CHARACTER
 START_BYTE = 425
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[6]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_7"
 DATA_TYPE = CHARACTER
 START_BYTE = 432
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[7]"
 END_OBJECT = COLUMN

/* ----- Experiment parameters MS (18 words) ----- */

OBJECT = COLUMN
 NAME = "MS_DURATION"
 DATA_TYPE = CHARACTER
 START_BYTE = 439
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) MS: Duration
 Basically, it's a timing information, but it varies

according to the programmed frequency:

| Bit | 1 kHz | 4 kHz |
|-----|--------|--------|
| 3 | 67,1 s | 16,8 s |
| 2 | 33,5 s | 8,4 s |
| 1 | 16,8 s | 4,19 s |
| 0 | 8,4 s | 2,1 s |

Please note: any combination is possible:

0x7 at 1kHz = 33,5 + 16,8 + 8,4 s
0x7 at 4kHz = 8,4 + 4,19 + 2,1 s"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_USE_AUTO_CAL_VAL"

DATA_TYPE = CHARACTER

START_BYTE = 446

BYTES = 5

UNIT = "N/A"

DESCRIPTION = "(Hexadecimal Format) MS: Use auto calibration values
possible values :
True
False"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_PRESSURE_CAL_GAS"

DATA_TYPE = ASCII_INTEGER

START_BYTE = 453

BYTES = 8

UNIT = "N/A"

FORMAT = I8

DESCRIPTION = "(Hexadecimal Format) MS: Pressure calibration gas"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_MODE"

DATA_TYPE = CHARACTER

START_BYTE = 463

BYTES = 6

UNIT = "N/A"

DESCRIPTION = "(Hexadecimal Format) MS: Mode ; possible values :
Single
Multi"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_GAS_FLOW_DELAY"

DATA_TYPE = CHARACTER

START_BYTE = 472

BYTES = 4

UNIT = "N/A"

DESCRIPTION = "(Hexadecimal Format) MS: Gas Flow Delay"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_U_0]"

DATA_TYPE = CHARACTER

START_BYTE = 479

BYTES = 4

UNIT = "N/A"

DESCRIPTION = "(Hexadecimal Format) MS: U[0]"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_1]"
DATA_TYPE = CHARACTER
START_BYTE = 486
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[1]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_2]"
DATA_TYPE = CHARACTER
START_BYTE = 493
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[2]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_3]"
DATA_TYPE = CHARACTER
START_BYTE = 500
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[3]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_0]"
DATA_TYPE = CHARACTER
START_BYTE = 507
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[0]
Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_1]"
DATA_TYPE = CHARACTER
START_BYTE = 514
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[1]
Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_2]"
DATA_TYPE = CHARACTER
START_BYTE = 521
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[2]
Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_3]"

```

DATA_TYPE = CHARACTER
START_BYTE = 528
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[3]
               Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_4]"
DATA_TYPE = CHARACTER
START_BYTE = 535
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[4]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_5]"
DATA_TYPE = CHARACTER
START_BYTE = 542
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[5]
               Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_6]"
DATA_TYPE = CHARACTER
START_BYTE = 549
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[6]
               Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_DET_START_DEL"
DATA_TYPE = CHARACTER
START_BYTE = 556
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Detector Start Delay
               This is an integer with the following bit allocation:
               Bit          Sampling time delay in microseconds
                   3          256
                   2          128
                   1           64
                   0           32 "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_WORDS_SC_DATA"
DATA_TYPE = CHARACTER
START_BYTE = 563
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Words to copy from Science Data"
END_OBJECT = COLUMN

```

/* ----- Experiment parameters GC (10 words) ----- */

OBJECT = COLUMN
NAME = "GC_TEMP_COL_0"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 569
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "GC: Temperature Column 0"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_TEMP_COL_1"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 578
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "GC: Temperature Column 1"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_TEMP_COL_2"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 587
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "GC: Temperature Column 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_TEMP_COL_3"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 596
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "GC: Temperature Column 3"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_TEMP_COL_4"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 605
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "GC: Temperature Column 4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_TEMP_COL_5"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 614
BYTES = 8
UNIT = "N/A"
FORMAT = I8

```

  DESCRIPTION = "GC: Temperature Column 5"
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME         = "GC_TEMP_COL_6"
DATA_TYPE    = ASCII_INTEGER
START_BYTE   = 623
BYTES        = 8
UNIT         = "N/A"
FORMAT       = I8
DESCRIPTION  = "Temperature Column 6"
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME         = "GC_TEMP_COL_7"
DATA_TYPE    = ASCII_INTEGER
START_BYTE   = 632
BYTES        = 8
UNIT         = "N/A"
FORMAT       = I8
DESCRIPTION  = "GC: Temperature Column 7"
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME         = "GC_WORDS_SC_DATA"
DATA_TYPE    = ASCII_INTEGER
START_BYTE   = 641
BYTES        = 8
UNIT         = "N/A"
FORMAT       = I8
DESCRIPTION  = "GC: Words to copy from Science Data"
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME         = "GC_TIME_TENAX"
DATA_TYPE    = ASCII_INTEGER
START_BYTE   = 650
BYTES        = 8
UNIT         = SECOND
FORMAT       = I8
DESCRIPTION  = "GC: Time to heat Tenax (sec)"
END_OBJECT   = COLUMN

```

The structure of the TABLE object is described in the file COSAC_CONFIG_FM1_8.FMT as follows:

```

/*          Contents of format file  "COSAC_CONFIG_FM1_8.FMT"          */

OBJECT           = COLUMN
  NAME           = "SD_VERSION_ID"
  DATA_TYPE     = CHARACTER
  START_BYTE     = 2
  BYTES          = 4
  DESCRIPTION    = "Science data stream version ID,
                   in hexadecimal format.
                   Forversion V1.8 the value is 0x0180"
END_OBJECT       = COLUMN

```

```
OBJECT          = COLUMN
  NAME          = "TIMEREF_ID"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 9
  BYTES         = 19
  DESCRIPTION   = "Used to synchronize LOBT and COBT.
                  The first 8 characters represent the LOBT
                  in hexadecimal (4 bytes) and the last 8
                  characters represent the COBT (4 bytes).
                  COBT is the Cosac On-Board Time with a
                  resolution of 1ms."
END_OBJECT      = COLUMN

/* TC */

OBJECT          = COLUMN
  NAME          = "TC_DATA"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 31
  BYTES         = 39
  DESCRIPTION   = "TC data words in hexadecimal format"
END_OBJECT      = COLUMN

/* CSIB_CFG */
/* Configuration data for tapping Station, MS and GC */

/* ----- Configuration data for Tapping Station (30 words) ----- */

OBJECT          = COLUMN
  NAME          = "TPST_DIR_CONTRL"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 73
  BYTES         = 8
  UNIT          = "N/A"
  DESCRIPTION   = "TPST: Direct controlling,
                  Possible values :
                    disabled
                    enabled"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
  NAME          = "TPST_POS_INFO"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 84
  BYTES         = 4
  UNIT          = "N/A"
  DESCRIPTION   = "(Hexadecimal Format) TPST: Position information
                  0x0000 = LUT , 0xffff = Value"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
  NAME          = "TPST_POS_ID"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 91
  BYTES         = 20
  UNIT          = "N/A"
  DESCRIPTION   = " TPST: Position ID
                  Possible values :
                    Open
                    Contacts closed
                    Main Terminal closed
```

```

                Side Terminal closed
                Upper position
                Lower position"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "TPST_POS_VALUE"
DATA_TYPE     = CHARACTER
START_BYTE    = 114
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION   = "(Hexadecimal Format) TPST: Position value,
                potentiometer value"

END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "TPST_DIRECTION"
DATA_TYPE     = CHARACTER
START_BYTE    = 121
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION   = "(Hexadecimal Format) TPST: Direction
                CS1.D7 = 0000
                CS1.D7 = ffff"

END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "TPST_TIME_TO_DRIVE"
DATA_TYPE     = CHARACTER
START_BYTE    = 128
BYTES         = 4
UNIT          = SECOND
DESCRIPTION   = "(Hexadecimal Format) TPST: Time to drive (sec)"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "TPST_START_CAL"
DATA_TYPE     = CHARACTER
START_BYTE    = 135
BYTES         = 5
UNIT          = "N/A"
DESCRIPTION   = "(Hexadecimal Format) TPST: Start calibration
                Possible values :
                False
                True"

END_OBJECT    = COLUMN
    
```

/* ----- Configuration data for MS (30 words) ----- */

```

OBJECT        = COLUMN
NAME          = "MS_HK_SWEEPING"
DATA_TYPE     = CHARACTER
START_BYTE    = 143
BYTES         = 3
UNIT          = "N/A"
DESCRIPTION   = "MS: HK sweeping
                Possible values :
                yes
                no"

END_OBJECT    = COLUMN
    
```

OBJECT = COLUMN
NAME = "MS_ACCUMULATE"
DATA_TYPE = CHARACTER
START_BYTE = 149
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "MS: Accumulate parameter ; possible values :
yes
no"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_CATHODE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 154
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "MS: Cathode number to be selected"
FORMAT = I1
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_EMI_CURRENT"
DATA_TYPE = CHARACTER
START_BYTE = 157
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Emission current"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_DET_VOLT"
DATA_TYPE = CHARACTER
START_BYTE = 164
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Detector voltage"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_RESOL"
DATA_TYPE = CHARACTER
START_BYTE = 171
BYTES = 4
UNIT = "N/A"
DESCRIPTION = " MS: Resolution possible values :
low
high "

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_FREQUENCY"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 177
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "MS: Frequency"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_RUN_CAL"
DATA_TYPE = CHARACTER
START_BYTE = 187
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "MS: Run calibration
Possible values :
False
True"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_SNIFFING_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 195
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "MS: Sniffing mode
Possible values :
disabled
enabled"

END_OBJECT = COLUMN

/* ----- Configuration data for GC (30 words) ----- */

OBJECT = COLUMN
NAME = "GC_HK_SWEEPING"
DATA_TYPE = CHARACTER
START_BYTE = 206
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "GC: HK sweeping
Possible values :
yes
no"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CONTINUE_FLAG"
DATA_TYPE = CHARACTER
START_BYTE = 212
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "GC: continue flag ; Possible values :
False
True"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_DUR_MEASURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 219
BYTES = 2
UNIT = "N/A"
FORMAT = I2
DESCRIPTION = "GC: Duration of measurement
This is an index pointing into a look-up table
holding the following values:

1 : 1,12 min
2 : 2,23 min
4 : 4,47 min
8 : 8,95 min
16 : 17,89 min

Note that any combination of the above values is possible!

01010 : 8,95 + 2,23 min

10101 : 17,89 + 4,47 + 1,12 min"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_HELIUM_TANK"
DATA_TYPE = CHARACTER
START_BYTE = 223
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "GC: Helium tank selected
Possible values :
Tank 1
Tank 2"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_DUR_INJEC"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 231
BYTES = 8
UNIT = MILLISECOND
FORMAT = I8
DESCRIPTION = "GC: Duration of injection (msec)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_SAMPLE"
DATA_TYPE = CHARACTER
START_BYTE = 241
BYTES = 15
UNIT = "N/A"
DESCRIPTION = "GC: Sample
Possible values :
Calibration gas
Oven
Tenax"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CHANNEL_1"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 258
BYTES = 1
UNIT = "N/A"
DESCRIPTION = "GC: Column selection for Channel 1
Column #1 0x000i (0 <= i <= 7)
Column #2 0x00i0 (0 <= i <= 7)
Column #3 0x0i00 (0 <= i <= 7)
Column #4 0xi000 (0 <= i <= 7)"

END_OBJECT = COLUMN

OBJECT = COLUMN

```

NAME           = "GC_CHANNEL_2"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 260
BYTES         = 1
UNIT          = "N/A"
DESCRIPTION    = "GC: Column selection for Channel 2
                  Column #1  0x000i (0 <= i <= 7)
                  Column #2  0x00i0 (0 <= i <= 7)
                  Column #3  0x0i00 (0 <= i <= 7)
                  Column #4  0xi000 (0 <= i <= 7)"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "GC_CHANNEL_3"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 262
BYTES         = 1
UNIT          = "N/A"
DESCRIPTION    = "GC: Column selection for Channel 3
                  Column #1  0x000i (0 <= i <= 7)
                  Column #2  0x00i0 (0 <= i <= 7)
                  Column #3  0x0i00 (0 <= i <= 7)
                  Column #4  0xi000 (0 <= i <= 7)"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "GC_CHANNEL_4"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 264
BYTES         = 1
UNIT          = "N/A"
DESCRIPTION    = "GC: Column selection for Channel 4
                  Column #1  0x000i (0 <= i <= 7)
                  Column #2  0x00i0 (0 <= i <= 7)
                  Column #3  0x0i00 (0 <= i <= 7)
                  Column #4  0xi000 (0 <= i <= 7)"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "GC_COL_HEAD_PRESS"
DATA_TYPE      = CHARACTER
START_BYTE     = 267
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "(Hexadecimal Format) GC: Column head pressure
                  0x0000 <= x <= 0x00ff"
END_OBJECT     = COLUMN

/* CSIB_PAR */
/*      Device parameters and experiment parameters for MS and GC      */

/* ----- Device parameters (27 words) ----- */

OBJECT         = COLUMN
NAME           = "TPST_POS_OPEN"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 273
BYTES         = 8
UNIT          = "N/A"
FORMAT        = I8

```

DESCRIPTION = "TPST: Position Open"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_CONT_CLOS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 282
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Contacts Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_MAIN_TERM_CLOS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 291
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Main Terminal Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_SIDE_TERM_CLOS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 300
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Side Terminal Closed"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_UPPER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 309
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Upper"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POS_LOWER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 318
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "TPST: Position Lower"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_BACKUP_RAM"
DATA_TYPE = CHARACTER
START_BYTE = 328
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "TPST: Use of Backup Ram ; possible values :

```

                                yes
                                no"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TPST_IGN_SD2_STAT"
DATA_TYPE       = CHARACTER
START_BYTE      = 334
BYTES           = 3
UNIT            = "N/A"
DESCRIPTION     = "TPST: Ignore SD2 Status ; possible values :
                                yes
                                no"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TPST_TIMEOUT_VALUE"
DATA_TYPE       = ASCII_INTEGER
START_BYTE      = 339
BYTES           = 8
UNIT            = "MILLISECOND"
FORMAT          = I8
DESCRIPTION     = "TPST: Timeout Value"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TPST_CREATE_REPORT"
DATA_TYPE       = CHARACTER
START_BYTE      = 349
BYTES           = 4
UNIT            = "N/A"
DESCRIPTION     = "(Hexadecimal Format) TPST: Create Report"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TEMPERATURE_0"
DATA_TYPE       = CHARACTER
START_BYTE      = 356
BYTES           = 4
UNIT            = "N/A"
DESCRIPTION     = "(Hexadecimal Format) Temperature[0]"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TEMPERATURE_1"
DATA_TYPE       = CHARACTER
START_BYTE      = 363
BYTES           = 4
UNIT            = "N/A"
DESCRIPTION     = "(Hexadecimal Format) Temperature[1]"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME            = "TEMPERATURE_2"
DATA_TYPE       = CHARACTER
START_BYTE      = 370
BYTES           = 4
UNIT            = "N/A"
DESCRIPTION     = "(Hexadecimal Format) Temperature[2]"
END_OBJECT      = COLUMN
```

OBJECT = COLUMN
NAME = "TEMPERATURE_3"
DATA_TYPE = CHARACTER
START_BYTE = 377
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[3]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_4"
DATA_TYPE = CHARACTER
START_BYTE = 384
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[4]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_5"
DATA_TYPE = CHARACTER
START_BYTE = 391
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[5]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_6"
DATA_TYPE = CHARACTER
START_BYTE = 398
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[6]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TEMPERATURE_7"
DATA_TYPE = CHARACTER
START_BYTE = 405
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Temperature[7]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HEATING_TIME_0"
DATA_TYPE = CHARACTER
START_BYTE = 412
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Heating Time[0]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HEATING_TIME_1"
DATA_TYPE = CHARACTER
START_BYTE = 419
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) Heating Time[1]"

END_OBJECT = COLUMN
 OBJECT = COLUMN
 NAME = "HEATING_TIME_2"
 DATA_TYPE = CHARACTER
 START_BYTE = 426
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[2]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_3"
 DATA_TYPE = CHARACTER
 START_BYTE = 433
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[3]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_4"
 DATA_TYPE = CHARACTER
 START_BYTE = 440
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[4]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_5"
 DATA_TYPE = CHARACTER
 START_BYTE = 447
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[5]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_6"
 DATA_TYPE = CHARACTER
 START_BYTE = 454
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[6]"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HEATING_TIME_7"
 DATA_TYPE = CHARACTER
 START_BYTE = 461
 BYTES = 4
 UNIT = "N/A"
 DESCRIPTION = "(Hexadecimal Format) Heating Time[7]"
 END_OBJECT = COLUMN

/* ----- Experiment parameters MS (18 words) ----- */

OBJECT = COLUMN
 NAME = "MS_DURATION"

DATA_TYPE = CHARACTER
START_BYTE = 468
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Duration
Basically, itoes a timing information, but it varies
according to the programmed frequency:
 Bit 1 kHz 4 kHz
 3 67,1 s 16,8 s
 2 33,5 s 8,4 s
 1 16,8 s 4,19 s
 0 8,4 s 2,1 s
Please note: any combination is possible:
0x7 at 1kHz = 33,5 + 16,8 + 8,4 s
0x7 at 4kHz = 8,4 + 4,19 + 2,1 s"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_USE_AUTO_CAL_VAL"
DATA_TYPE = CHARACTER
START_BYTE = 475
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Use auto calibration values
possible values :
 True
 False"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_PRESSURE_CAL_GAS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 482
BYTES = 8
UNIT = "N/A"
FORMAT = I8
DESCRIPTION = "(Hexadecimal Format) MS: Pressure calibration gas"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 492
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Mode ; possible values :
 Single
 Multi"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_GAS_FLOW_DELAY"
DATA_TYPE = CHARACTER
START_BYTE = 501
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Gas Flow Delay"

END_OBJECT = COLUMN

OBJECT = COLUMN

NAME = "MS_U_0]"
DATA_TYPE = CHARACTER
START_BYTE = 508
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[0]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_1]"
DATA_TYPE = CHARACTER
START_BYTE = 515
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[1]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_2]"
DATA_TYPE = CHARACTER
START_BYTE = 522
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[2]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_U_3]"
DATA_TYPE = CHARACTER
START_BYTE = 529
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: U[3]"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_0]"
DATA_TYPE = CHARACTER
START_BYTE = 536
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[0]
Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_1]"
DATA_TYPE = CHARACTER
START_BYTE = 543
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[1]
Counter with 31,25 ms/cnt "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_T_2]"
DATA_TYPE = CHARACTER
START_BYTE = 550
BYTES = 4
UNIT = "N/A"

```

DESCRIPTION = "(Hexadecimal Format) MS: T[2]
                Counter with 31,25 ms/cnt "
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_T_3]"
DATA_TYPE   = CHARACTER
START_BYTE  = 557
BYTES      = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[3]
                Counter with 31,25 ms/cnt "
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_T_4]"
DATA_TYPE   = CHARACTER
START_BYTE  = 564
BYTES      = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[4]"
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_T_5]"
DATA_TYPE   = CHARACTER
START_BYTE  = 571
BYTES      = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[5]
                Counter with 31,25 ms/cnt "
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_T_6]"
DATA_TYPE   = CHARACTER
START_BYTE  = 578
BYTES      = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: T[6]
                Counter with 31,25 ms/cnt "
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_DET_START_DEL"
DATA_TYPE   = CHARACTER
START_BYTE  = 585
BYTES      = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Detector Start Delay
                This is an integer with the following bit allocation:
                Bit           Sampling time delay in microseconds
                3             256
                2             128
                1             64
                0             32 "
END_OBJECT   = COLUMN

OBJECT       = COLUMN
NAME        = "MS_WORDS_SC_DATA"
DATA_TYPE   = CHARACTER
    
```

```
START_BYTE = 592
BYTES      = 4
UNIT       = "N/A"
DESCRIPTION = "(Hexadecimal Format) MS: Words to copy from Science Data"
END_OBJECT = COLUMN
```

```
/* ----- Experiment parameters GC (10 words) ----- */
```

```
OBJECT      = COLUMN
NAME        = "GC_TEMP_COL_0"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 598
BYTES       = 8
UNIT        = "N/A"
FORMAT      = I8
DESCRIPTION = "GC: Temperature Column 0"
END_OBJECT  = COLUMN
```

```
OBJECT      = COLUMN
NAME        = "GC_TEMP_COL_1"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 607
BYTES       = 8
UNIT        = "N/A"
FORMAT      = I8
DESCRIPTION = "GC: Temperature Column 1"
END_OBJECT  = COLUMN
```

```
OBJECT      = COLUMN
NAME        = "GC_TEMP_COL_2"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 616
BYTES       = 8
UNIT        = "N/A"
FORMAT      = I8
DESCRIPTION = "GC: Temperature Column 2"
END_OBJECT  = COLUMN
```

```
OBJECT      = COLUMN
NAME        = "GC_TEMP_COL_3"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 625
BYTES       = 8
UNIT        = "N/A"
FORMAT      = I8
DESCRIPTION = "GC: Temperature Column 3"
END_OBJECT  = COLUMN
```

```
OBJECT      = COLUMN
NAME        = "GC_TEMP_COL_4"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 634
BYTES       = 8
UNIT        = "N/A"
FORMAT      = I8
DESCRIPTION = "GC: Temperature Column 4"
END_OBJECT  = COLUMN
```

```
OBJECT      = COLUMN
```

NAME = "GC_TEMP_COL_5"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 643
 BYTES = 8
 UNIT = "N/A"
 FORMAT = I8
 DESCRIPTION = "GC: Temperature Column 5"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_TEMP_COL_6"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 652
 BYTES = 8
 UNIT = "N/A"
 FORMAT = I8
 DESCRIPTION = "Temperature Column 6"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_TEMP_COL_7"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 661
 BYTES = 8
 UNIT = "N/A"
 FORMAT = I8
 DESCRIPTION = "GC: Temperature Column 7"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_WORDS_SC_DATA"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 670
 BYTES = 8
 UNIT = "N/A"
 FORMAT = I8
 DESCRIPTION = "GC: Words to copy from Science Data"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_TIME_TENAX"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 679
 BYTES = 8
 UNIT = SECOND
 FORMAT = I8
 DESCRIPTION = "GC: Time to heat Tenax (sec)"
 END_OBJECT = COLUMN

4.3.2.3.2 The description of the TIME table (flight software version previous to 1.8)

OBJECT = COSAC_TIME_ID_TABLE
 NAME = TIME_ID
 INTERCHANGE_FORMAT = ASCII
 ROWS = 1
 ^STRUCTURE = "COSAC_TIME_ID.FMT"
 COLUMNS = 2
 ROW_BYTES = 15
 END_OBJECT = COSAC_TIME_ID_TABLE

The structure of the TABLE object is described in the file COSAC_TIME_ID.FMT as follows:

```

/*          Contents of format file  "COSAC_TIME_ID.FMT"          */
OBJECT          = COLUMN
NAME            = "HIGH_LOBT"
DATA_TYPE      = CHARACTER
START_BYTE     = 2
BYTES         = 4
DESCRIPTION    = "HIGH_LOBT in Hexadecimal format"
UNIT           = "N/A"
END_OBJECT     = COLUMN

OBJECT          = COLUMN
NAME            = "LOW_LOBT"
DATA_TYPE      = CHARACTER
START_BYTE     = 9
BYTES         = 4
UNIT           = "N/A"
DESCRIPTION    = "LOW_LOBT in Hexadecimal format"
END_OBJECT     = COLUMN
    
```

4.3.2.3.3 The description of the FULL_HK table:

```

OBJECT          = COSAC_FULL_HK_TABLE
NAME            = FULL_HK_ID
INTERCHANGE_FORMAT = ASCII
ROWS           = 1
^STRUCTURE     = "COSAC_FULL_HK_SC.FMT"
COLUMNS       = 92
ROW_BYTES      = 790
END_OBJECT     = COSAC_FULL_HK_TABLE
    
```

The structure of the TABLE object is described in the file COSAC_FULL_HK_SC.FMT as follows:

```

/*          Contents of format file  "COSAC_FULL_HK_SC.FMT"          */
/*-----*/
/*          Values delivered to CDMS (64)          */
/*-----*/
/*          ..... DPU .....          */
/*-----*/

OBJECT          = COLUMN
NAME            = "P5V_C"
DATA_TYPE      = ASCII_REAL
START_BYTE     = 1
BYTES         = 8
UNIT           = MILLIAMPERE
FORMAT         = "F8.2"
DESCRIPTION    = "CURRENT +5V LINE"
END_OBJECT     = COLUMN

OBJECT          = COLUMN
NAME            = "M5V_C"
DATA_TYPE      = ASCII_REAL
START_BYTE     = 10
    
```


COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 60

BYTES = 8
 FORMAT = "F8.2"
 UNIT = MILLIAMPERE
 DESCRIPTION = "CURRENT -5V LINE"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "P12V_C"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 19
 BYTES = 8
 UNIT = MILLIAMPERE
 FORMAT = "F8.2"
 DESCRIPTION = "CURRENT +12V LINE"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "M12V_C"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 28
 BYTES = 8
 UNIT = MILLIAMPERE
 FORMAT = "F8.2"
 DESCRIPTION = "CURRENT -12V LINE"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "SYSTEM_POWER"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 37
 BYTES = 8
 UNIT = WATT
 FORMAT = "F8.2"
 DESCRIPTION = "SYSTEM POWER "
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_ADC_INPUT"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 46
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "GC ADC INPUT"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_ADC_INPUT"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 55
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "MS ADC INPUT"
 END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN7_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 64
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 7"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN8_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 73
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 8"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN9_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 82
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 9"
FORMAT = "I8"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN10_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 91
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 10"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN11_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 100
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 11"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN12_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 109
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"

COSAC EAICD

Document No. : COSAC EAICD
Issue/Rev. No. : 1/2
Date : 09 Feb. 2017
Page : 62

DESCRIPTION = "DPU MUX CHANNEL 12 "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN13_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 118
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 13"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN14_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 127
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 14"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "DPU_VOLTAGE"
DATA_TYPE = ASCII_REAL
START_BYTE = 136
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "VOLTAGE DPU"
END_OBJECT = COLUMN

/* GC */

OBJECT = COLUMN
NAME = "HE1_PRESSURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 145
BYTES = 10
UNIT = MILLIBAR
FORMAT = "I10"
DESCRIPTION = "Pressure He Tank 1"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HE2_PRESSURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 156
BYTES = 10
UNIT = MILLIBAR
FORMAT = "I10"
DESCRIPTION = "Pressure He Tank 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "IONS_MS_PRESSURE"

DATA_TYPE = ASCII_INTEGER
START_BYTE = 167
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "Pressure Ion Source MS"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GCBOARD2_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 176
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature GC-Board2 "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TENAX_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 185
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Tenax"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HE_SEC_PRESSURE"
DATA_TYPE = ASCII_REAL
START_BYTE = 194
BYTES = 8
UNIT = MILLIBAR
FORMAT = "F8.2"
DESCRIPTION = "Secondary pressure HE)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "VALVE_VOLTAGE"
DATA_TYPE = ASCII_REAL
START_BYTE = 203
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "Voltage valve unit"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN1_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 212
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Column 1)"
END_OBJECT = COLUMN

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 64

OBJECT = COLUMN
 NAME = "COLUMN2_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 221
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN3_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 230
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 3"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN4_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 239
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 4"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN5_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 248
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 5"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN6_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 257
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 6"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN7_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 266
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 7"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN8_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 275
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Column 8)"
 END_OBJECT = COLUMN

/* MS */

OBJECT = COLUMN
 NAME = "PIPEA_M_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 284
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Pipe a (main)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "PIPEB_M_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 293
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Pipe b (side)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "OVEN_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 302
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature Oven"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MSEBOX_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 311
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature MS-EBox)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CALGAS_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 320
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "Pressure Calibration Gas"
 END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POSITION"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 329
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "Position Tapping Station
Open >= 4500,
OT (Oberer Totpunkt/Top dead centre) ~ 4710,
UT (Unterer Totpunkt/bottom dead centre) ~ 1330)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "EMISSION_CURRENT"
DATA_TYPE = ASCII_REAL
START_BYTE = 338
BYTES = 8
UNIT = NANOAMPERE
FORMAT = "F8.2"
DESCRIPTION = "Emission current"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV1_DET_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 347
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "MS HV 1, U detector"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV2_REFL2_4_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 356
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "MS HV 2, U reflector2_4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV3_REFL2_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 365
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "MS HV 3, U reflector 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV4_REFL1_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 374
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"

DESCRIPTION = "MS HV 4, U reflector 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV5_LENSE2_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 383
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 5, U lense 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV6_LENSE1_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 392
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 6, U lense 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV7_G3_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 401
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 7, U G3"
 END_OBJECT = COLUMN

/* OS */

OBJECT = COLUMN
 NAME = "REC_CDMS_MSG"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 410
 BYTES = 6
 UNIT = "N/A"
 FORMAT = "I6"
 DESCRIPTION = "Counter for received CDMS messages"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TRANS_CDMS_MSG"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 417
 BYTES = 6
 UNIT = "N/A"
 FORMAT = "I6"
 DESCRIPTION = "Counter for transmit CDMS messages"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "STAT_CDMS_MSG"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 424
 BYTES = 6
 UNIT = "N/A"

FORMAT = "I6"
DESCRIPTION = "Counter for CDMS status messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STORED_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 431
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Counter for stored messages (TCs)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "RERC_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 438
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Counter for RERC messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_SSIF_ERROR"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 445
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Last received SSIF error code)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_HIGH"
DATA_TYPE = CHARACTER
START_BYTE = 453
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "LOBT, high in Hexadecimal Format"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_LOW"
DATA_TYPE = CHARACTER
START_BYTE = 460
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "LOBT, low in Hexadecimal Format"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "BRAM_POINTER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 466
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "BackupRAM pointer"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "PHECOPY"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 473
BYTES = 6
UNIT = "MILLIBAR"
FORMAT = "I6"
DESCRIPTION = "copy of Pressure HE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_CYCLES"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 480
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "MS cycles"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_CYCLES"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 487
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "GC cycles"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SYSSTATUS2"
DATA_TYPE = CHARACTER
START_BYTE = 495
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "System Status 2 (Hexadecimal Format)
Single Shot Valve: b01 = armed, b11 = fired
HK auto collection: 0 = disabled, 1 = enabled
MM dump: 0 = idle, 1 = in progress
MM auto dump: 0 = disabled, 1 = enabled"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SYSSTATUS1"
DATA_TYPE = CHARACTER
START_BYTE = 502
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "System Status 1 (Hexadecimal Format)
Configuration valid: bxx1 = TPST, bxlx = MS, blxx = GC
Continue Flag (not supported)
Waiting flag (not supported)
System Mode: b000 = idle, b001 = GC, b010=MS, b011=GCMS, b100 = Self test
Power Switch: bxxx1=pws1, bxxlx=pws2, bxlxx=pws3 (not used), blxxx = pws4
Mass Memory: 0 = off, 1 = on
EEPROM Timestamp: 0 = okay, 1 = mismatch
TPST direction changed: 0 = false, 1 = true
SD2 ready flag: 0 = false, 1 = true"

```

END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "ERROR_MSG"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 508
BYTES         = 6
UNIT          = "N/A"
FORMAT        = "I6"
DESCRIPTION    = "Error Message"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
NAME           = "TPST_LAST"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 515
BYTES         = 6
UNIT          = "N/A"
FORMAT        = "I6"
DESCRIPTION    = "Last read position of TPST"
END_OBJECT      = COLUMN

```

```

/* ----- */
/* Values used internally and added to the science data stream (42) */
/* ----- */

```

```

OBJECT          = COLUMN
NAME           = "ALLOC_BRAM_SIZE"
DATA_TYPE      = CHARACTER
START_BYTE     = 523
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "(Hexadecimal format) Allocated BackupRAM size of Cosac
                 inside CDMS memory 0x0000 <= x <= 0xffff"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
NAME           = "CKECK_SC_PACKET"
DATA_TYPE      = CHARACTER
START_BYTE     = 530
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "(Hexadecimal format) Checksum of Science Data packet
                 as received from CDMS 0x0000 <= x <= 0xffff"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
NAME           = "OFF_LEN_TC"
DATA_TYPE      = CHARACTER
START_BYTE     = 537
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "(Hexadecimal format) Offset & Length of stored TC,
                 see CDMS SSpec; 0x0000 <= x <= 0xffff"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
NAME           = "SCHED_SSIF_REQ"
DATA_TYPE      = CHARACTER
START_BYTE     = 544

```

BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Currently scheduled SSIF Request Code,
see CDMS SSpec; 0x0000 <= x <= 0x0a"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_CDMS_SSS"
DATA_TYPE = CHARACTER
START_BYTE = 551
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) last CDMS Service System Status,
see CDMS SSpec; 0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_CDMS_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 558
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format)last CDMS Mode (RMODE)
CDMS Mode
SSCLK Frequency
Current AMST ID"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TRIGGER_WORD"
DATA_TYPE = CHARACTER
START_BYTE = 565
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Trigger word
Dest. Unit Trigger Word Field"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "ALLOC_SC_VOL"
DATA_TYPE = CHARACTER
START_BYTE = 572
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Allocated Science Data Volume,
see CDMS SSpec; 0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$MMFIRSTINIT"
DATA_TYPE = CHARACTER
START_BYTE = 579
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "First init. of Mass Memory needed
Possible values :
false
true"
END_OBJECT = COLUMN

```
OBJECT      = COLUMN
NAME        = "$MMRDCNTHIGHMASS"
DATA_TYPE   = CHARACTER
START_BYTE  = 587
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal format) Memory read counter high address
              0x0000 <= x <= 0xffff"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "$MMRDCNTLOWMASS"
DATA_TYPE   = CHARACTER
START_BYTE  = 594
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal format) Memory read counter low address,
              0x0000 <= x <= 0xffff"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "MMADRHMMASS"
DATA_TYPE   = CHARACTER
START_BYTE  = 601
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal format) MMADRHMmass Memory SW addr counter,high"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "MMADRLMASS"
DATA_TYPE   = CHARACTER
START_BYTE  = 608
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal format) Memory SW addr counter, low"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "MM$FLUSH"
DATA_TYPE   = CHARACTER
START_BYTE  = 615
BYTES       = 5
UNIT        = "N/A"
DESCRIPTION = "Flag if MM flush is needed
              Possible values :
              false
              true"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "$RFR"
DATA_TYPE   = CHARACTER
START_BYTE  = 623
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION = "(Hexadecimal format) Frame read index
              0x0000 <= x <= 0xffff"
END_OBJECT  = COLUMN
```

OBJECT = COLUMN
NAME = "\$WFR"
DATA_TYPE = CHARACTER
START_BYTE = 630
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Frame write index
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$PFR"
DATA_TYPE = CHARACTER
START_BYTE = 637
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) current Frame index
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$RMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 644
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Mass Memory frame read index
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$WMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 651
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Mass Memory frame write index
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$PMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 658
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) current Mass Memory frame index
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$IDLECNT"
DATA_TYPE = CHARACTER
START_BYTE = 665
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Idle task counter
0x0000 <= x <= 0xffff"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$SD2STATUS"
DATA_TYPE = CHARACTER
START_BYTE = 672
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Copy of SD2 carousel status,
0xf000 = SD2 Ready"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$MMDUMP"
DATA_TYPE = CHARACTER
START_BYTE = 679
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "Mass Memory auto-dump
Possible values :
false
true"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TDCMODE"
DATA_TYPE = CHARACTER
START_BYTE = 687
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) Mode in which the TDC is operated in"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$DPUADR"
DATA_TYPE = CHARACTER
START_BYTE = 694
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "(Hexadecimal format) First faulty address of DPU memory,
default : 0X0000"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$EODATA"
DATA_TYPE = CHARACTER
START_BYTE = 701
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "Create OCPL when MM empty,
Possible values :
false
true"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$EOM"
DATA_TYPE = CHARACTER
START_BYTE = 709
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "End of measurement,

```

                Possible values :
                false
                true"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "$TDCSKIP"
DATA_TYPE     = CHARACTER
START_BYTE   = 717
BYTES        = 5
UNIT         = "N/A"
DESCRIPTION   = "TDC produced time-out,
                Possible values :
                false
                true"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "$GCSKIP"
DATA_TYPE     = CHARACTER
START_BYTE   = 725
BYTES        = 5
UNIT         = "N/A"
DESCRIPTION   = "GC produced time-out,
                Possible values :
                false
                true"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "GVSTAC.RESULT"
DATA_TYPE     = CHARACTER
START_BYTE   = 733
BYTES        = 3
UNIT         = "N/A"
DESCRIPTION   = "Result of last action,
                Possible values :
                OK
                NOK"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME          = "SER_SYS_STAT"
DATA_TYPE     = CHARACTER
START_BYTE   = 739
BYTES        = 49
UNIT         = "N/A"
DESCRIPTION   = "Copy of CDMS Service System Status ; see CDMS SSpec
                (String of 10 word in Hexadecimal format;
                each word separated by a space)"
END_OBJECT    = COLUMN

```

4.3.2.3.4 The description of the HK_BURST table (flight software 1.8):

```

OBJECT        = COSAC_HK_BURST_TABLE
NAME          = HK_BURST_ID
INTERCHANGE_FORMAT = ASCII
ROWS         =
^STRUCTURE   = "COSAC_HK_BURST.FMT"
COLUMNS     =

```



```

        ROW_BYTES          =
    END_OBJECT              = COSAC_HK_BURST_TABLE
    
```

The structure of the TABLE object is described in the file COSAC_HK_BURST.FMT as follows:

```

/*          Contents of format file  "COSAC_HK_BURST.FMT"          */
/* valid for flight software V 1.8 uploaded at PC 10,          */
/* 2009-09-23T22:00:00 UTC                                     */

/*          ..... DPU .....                                     */

OBJECT      = COLUMN
NAME        = "P5V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 1
BYTES       = 9
UNIT        = MILLIAMPERE
FORMAT      = "F9.2"
DESCRIPTION = "CURRENT +5V LINE"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "M5V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 11
BYTES       = 9
FORMAT      = "F9.2"
UNIT        = MILLIAMPERE
DESCRIPTION = "CURRENT -5V LINE"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "P12V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 21
BYTES       = 9
UNIT        = MILLIAMPERE
FORMAT      = "F9.2"
DESCRIPTION = "CURRENT +12V LINE"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "M12V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 31
BYTES       = 9
UNIT        = MILLIAMPERE
FORMAT      = "F9.2"
DESCRIPTION = "CURRENT -12V LINE"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "SYSTEM_POWER"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 41
BYTES       = 9
UNIT        = WATT
FORMAT      = "F9.2"
DESCRIPTION = "SYSTEM POWER "
END_OBJECT  = COLUMN
    
```

OBJECT = COLUMN
NAME = "GC_ADC_INPUT"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 51
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "GC ADC INPUT"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_ADC_INPUT"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 60
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "MS ADC INPUT"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN7_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 69
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 7"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN8_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 78
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 8"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN9_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 87
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 9"
FORMAT = "I8"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CHAN10_DPU_MUX"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 96
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "DPU MUX CHANNEL 10"
END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CHAN11_DPU_MUX"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 105
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "DPU MUX CHANNEL 11"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CHAN12_DPU_MUX"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 114
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "DPU MUX CHANNEL 12 "
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CHAN13_DPU_MUX"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 123
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "DPU MUX CHANNEL 13"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CHAN14_DPU_MUX"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 132
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "DPU MUX CHANNEL 14"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "DPU_VOLTAGE"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 141
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "VOLTAGE DPU"
 END_OBJECT = COLUMN

/* GC */

OBJECT = COLUMN
 NAME = "HE1_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 151
 BYTES = 10
 UNIT = MILLIBAR
 FORMAT = "I10"
 DESCRIPTION = "Pressure He Tank 1"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HE2_PRESSURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 162
BYTES = 10
UNIT = MILLIBAR
FORMAT = "I10"
DESCRIPTION = "Pressure He Tank 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "IONS_MS_PRESSURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 173
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "Pressure Ion Source MS"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GCBOARD2_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 182
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature GC-Board2 "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TENAX_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 192
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Tenax"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "HE_SEC_PRESSURE"
DATA_TYPE = ASCII_REAL
START_BYTE = 202
BYTES = 9
UNIT = MILLIBAR
FORMAT = "F9.2"
DESCRIPTION = "Secondary pressure HE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "VALVE_VOLTAGE"
DATA_TYPE = ASCII_REAL
START_BYTE = 212
BYTES = 9
UNIT = VOLT
FORMAT = "F9.2"
DESCRIPTION = "Voltage valve unit"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN1_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 222
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 1"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN2_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 232
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN3_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 242
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 3"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN4_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 252
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN5_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 262
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 5"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN6_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 272
BYTES = 9
UNIT = KELVIN
FORMAT = "F9.2"
DESCRIPTION = "Temperature Column 6"
END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN7_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 282
 BYTES = 9
 UNIT = KELVIN
 FORMAT = "F9.2"
 DESCRIPTION = "Temperature Column 7"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COLUMN8_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 292
 BYTES = 9
 UNIT = KELVIN
 FORMAT = "F9.2"
 DESCRIPTION = "Temperature Column 8"
 END_OBJECT = COLUMN

/* MS */

OBJECT = COLUMN
 NAME = "PIPEA_MAIN_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 302
 BYTES = 9
 UNIT = KELVIN
 FORMAT = "F9.2"
 DESCRIPTION = "Temperature Pipe a (main)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "PIPEB_SIDE_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 312
 BYTES = 9
 UNIT = KELVIN
 FORMAT = "F9.2"
 DESCRIPTION = "Temperature Pipe b (side)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "OVEN_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 322
 BYTES = 9
 UNIT = KELVIN
 FORMAT = "F9.2"
 DESCRIPTION = "Temperature Oven"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_EBOX_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 332
 BYTES = 9
 UNIT = KELVIN

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 82

FORMAT = "F9.2"
 DESCRIPTION = "Temperature MS-EBox"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CALGAS_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 342
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "Pressure Calibration Gas"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TPST_POSITION"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 351
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "Position Tapping Station
 Open >= 4500,
 OT (Oberer Totpunkt/Top dead centre) ~ 4710,
 UT (Unterer Totpunkt/bottom dead centre) ~ 1330)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "EMISSION_CURRENT"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 360
 BYTES = 9
 UNIT = NANOAMPERE
 FORMAT = "F9.2"
 DESCRIPTION = "Emission current"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV1_U_DETECTOR"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 370
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 1, U detector"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV2_U_REFLECTOR2_4"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 380
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 2, U reflector2_4"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV3_U_REFLECTOR2"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 390

BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 3, U reflector 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV4_U_REFLECTOR1"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 400
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 4, U reflector 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV5_U_LENSE2"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 410
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 5, U lense 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV6_U_LENSE1"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 420
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 6, U lense 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV7_U_G3"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 430
 BYTES = 9
 UNIT = VOLT
 FORMAT = "F9.2"
 DESCRIPTION = "MS HV 7, U G3"
 END_OBJECT = COLUMN

/* OS */

OBJECT = COLUMN
 NAME = "CNT_MS_HV_FAILURES"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 440
 BYTES = 3
 UNIT = "N/A"
 FORMAT = "I3"
 DESCRIPTION = "Counter for MS HV failures"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CNT_CDMS_REQ_TIME_OUT"
 DATA_TYPE = ASCII_INTEGER

START_BYTE = 444
BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Counter for received CDMS requests time-outs"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_TSCR_SSIF_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 448
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Counter for transmit TSCR SSIF messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_STAT_CDMS_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 455
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Counter for CDMS status messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_STORED_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 462
BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Counter for stored messages (TCs)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_INT4"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 466
BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Counter for INT4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_TC_ERR"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 470
BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Counter for TC checksum errors"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "CNT_RERC_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 474

BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Counter for RERC messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_SSIF_ERROR"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 478
BYTES = 3
UNIT = "N/A"
FORMAT = "I3"
DESCRIPTION = "Last received SSIF error code"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_5_MSBITS"
DATA_TYPE = CHARACTER
START_BYTE = 483
BYTES = 2
UNIT = "N/A"
DESCRIPTION = "Timestamp of HK update
LOBT 5 upper bits (hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_HIGH"
DATA_TYPE = CHARACTER
START_BYTE = 488
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Timestamp of HK update
LOBT most significant word in Hexadecimal Format"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_LOW"
DATA_TYPE = CHARACTER
START_BYTE = 495
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Timestamp of HK update
LOBT least significant word in Hexadecimal Format"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "PRESS_HE_COPY"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 501
BYTES = 6
UNIT = "MILLIBAR"
FORMAT = "I6"
DESCRIPTION = "copy of Pressure HE (updated during GC start)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_CYCLES"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 508
BYTES = 3

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 86

UNIT = "N/A"
 FORMAT = "I3"
 DESCRIPTION = "MS cycles"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GC_CYCLES"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 512
 BYTES = 3
 UNIT = "N/A"
 FORMAT = "I3"
 DESCRIPTION = "GC cycles"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "STAT2_SINGLE_SHOT_VALVE"
 DATA_TYPE = CHARACTER
 START_BYTE = 517
 BYTES = 5
 UNIT = "N/A"
 DESCRIPTION = "System Status 2
 Single Shot Valve status.
 The possible values are:
 ARMED or FIRED "
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "STAT2_COMPRESSION"
 DATA_TYPE = CHARACTER
 START_BYTE = 525
 BYTES = 5
 UNIT = "N/A"
 DESCRIPTION = "System Status 2
 The possible values are:
 GC or/and MS"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "STAT2_UNIT_ON"
 DATA_TYPE = CHARACTER
 START_BYTE = 533
 BYTES = 5
 UNIT = "N/A"
 DESCRIPTION = "System Status 2
 The possible values are:
 GC or/and MS"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "STAT2_TEXT_FRAMES"
 DATA_TYPE = CHARACTER
 START_BYTE = 541
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "System Status 2
 The possible values are:
 DISABLED or ENABLED"
 END_OBJECT = COLUMN

OBJECT = COLUMN

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 87

```

NAME           = "STAT2_TPST_COR"
DATA_TYPE      = CHARACTER
START_BYTE     = 552
BYTES          = 3
UNIT           = "N/A"
DESCRIPTION    = "System Status 2
                  TPST correction
                  The possible values are:
                  YES or NO "
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "STAT2_HK_RATE"
DATA_TYPE      = CHARACTER
START_BYTE     = 558
BYTES          = 4
UNIT           = "N/A"
DESCRIPTION    = "System Status 2
                  The possible values are:
                  HIGH or LOW
                  Low rate means CDMS HK."
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "STAT2_HK_AUTO"
DATA_TYPE      = CHARACTER
START_BYTE     = 565
BYTES          = 8
UNIT           = "N/A"
DESCRIPTION    = "System Status 2.
                  HK auto collection.
                  The possible values are:
                  DISABLED or ENABLED"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "STAT2_MM_DUMP"
DATA_TYPE      = CHARACTER
START_BYTE     = 576
BYTES          = 11
UNIT           = "N/A"
DESCRIPTION    = "System Status 2
                  The possible values are:
                  IDLE or IN PROGRESS"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "STAT2_MM_AUTO_DUMP"
DATA_TYPE      = CHARACTER
START_BYTE     = 590
BYTES          = 8
UNIT           = "N/A"
DESCRIPTION    = "System Status 2
                  The possible values are:
                  DISABLED or ENABLED"
END_OBJECT     = COLUMN

OBJECT         = COLUMN
NAME           = "STAT1_VALID_CONFP"
DATA_TYPE      = CHARACTER
START_BYTE     = 601
  
```

BYTES = 10
UNIT = "N/A"
DESCRIPTION = "System Status 1
The possible values are:
TPST and/or MS and/or GC"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_ADC_TIMEOUT"
DATA_TYPE = CHARACTER
START_BYTE = 614
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "System Status 1
The possible values are:
NO or YES"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_SYS_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 620
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "System Status 1
System mode.
The possible values are:
IDLE, GC, MS, GCMS or SELFTEST"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_POWER_SWITCH"
DATA_TYPE = CHARACTER
START_BYTE = 631
BYTES = 19
UNIT = "N/A"
DESCRIPTION = "System Status 1
The possible values are:
PWS1 and/or PWS2 and/or PWS3 and/or PWS4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_MASS_MEM"
DATA_TYPE = CHARACTER
START_BYTE = 653
BYTES = 3
UNIT = "N/A"
DESCRIPTION = "System Status 1
Mass memory status.
The possible values are:
OFF or ON"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_EEPROM_TIMESTAMP"
DATA_TYPE = CHARACTER
START_BYTE = 659
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "System Status 1
The possible values are:

```

      OK or MISMATCH"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STAT1_TPST_DIR_CHNG"
DATA_TYPE = CHARACTER
START_BYTE = 670
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "System Status 1.
               Whether TPST direction changed.
               The possible values are:
               TRUE or FALSE"

```

```
END_OBJECT = COLUMN
```

```

OBJECT = COLUMN
NAME = "STAT1_SD2_READY"
DATA_TYPE = CHARACTER
START_BYTE = 678
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "System Status 1
               SD2 ready flag.
               The possible values are:
               FALSE or TRUE"

```

```
END_OBJECT = COLUMN
```

```

OBJECT = COLUMN
NAME = "ERROR_MSG"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 685
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Error Message"
END_OBJECT = COLUMN

```

```

OBJECT = COLUMN
NAME = "TPST_LAST_POS"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 692
BYTES = 6
UNIT = "N/A"
FORMAT = "I6"
DESCRIPTION = "Last read position of TPST"
END_OBJECT = COLUMN

```

```

/* ----- */
/* Values used internally and added to the science data stream (42) */
/* ----- */

```

```

OBJECT = COLUMN
NAME = "ALLOC_BRAM_SIZE"
DATA_TYPE = CHARACTER
START_BYTE = 700
BYTES = 4
UNIT = "N/A"
DESCRIPTION = " Allocated BackupRAM size of Cosac
               inside CDMS memory 0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

```

OBJECT = COLUMN
NAME = "CCKECSUM_SC_PACKET"
DATA_TYPE = CHARACTER
START_BYTE = 707
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Checksum of Science Data packet
as received from CDMS 0x0000 <= x <= 0xffff (Hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "STORED_TC_OFFSET_LEN"
DATA_TYPE = CHARACTER
START_BYTE = 714
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Offset & Length of stored TC,
see CDMS SSpec; 0x0000 <= x <= 0xffff (Hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SCHED_SSIF_REQ"
DATA_TYPE = CHARACTER
START_BYTE = 721
BYTES = 4
UNIT = "N/A"
DESCRIPTION = " Currently scheduled SSIF Request Code,
see CDMS SSpec; 0x0000 <= x <= 0x0a (Hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_CDMS_SSS"
DATA_TYPE = CHARACTER
START_BYTE = 728
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Last CDMS Service System Status,
see CDMS SSpec; 0x0000 <= x <= 0xffff (hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LAST_CDMS_MODE"
DATA_TYPE = CHARACTER
START_BYTE = 735
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Last CDMS Mode (hexadecimal)
bits 15, 14: CDMS Mode
bits 13, 12: SSCLK Frequency
bits 11 to 0: Current AMST ID"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TRIGGER_WORD"
DATA_TYPE = CHARACTER
START_BYTE = 742
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Trigger word (Hexadecimal)
bits 15 to 11: destination unit

```
bits 10 to 0: trigger word field"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "ALLOC_SC_VOL"
DATA_TYPE = CHARACTER
START_BYTE = 749
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Allocated Science Data Volume,
see CDMS SSpec; 0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$MMFIRSTINIT"
DATA_TYPE = CHARACTER
START_BYTE = 756
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "First init. of Mass Memory needed
Possible values :
FALSE
TRUE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$MMRDCNTHIGH"
DATA_TYPE = CHARACTER
START_BYTE = 764
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Memory read counter high address
0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$MMRDCNTLOW"
DATA_TYPE = CHARACTER
START_BYTE = 771
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Memory read counter low address,
0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MMADRH"
DATA_TYPE = CHARACTER
START_BYTE = 778
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Mass Memory SW addr counter,high (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MMADRL"
DATA_TYPE = CHARACTER
START_BYTE = 785
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Memory SW addr counter, low (Hexadecimal)"
```

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MM\$FLUSH"
DATA_TYPE = CHARACTER
START_BYTE = 792
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "Flag if MM flush is needed
Possible values :
FALSE
TRUE"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$RFR"
DATA_TYPE = CHARACTER
START_BYTE = 800
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Frame read index
0x0000 <= x <= 0xffff (Hexadecimal) "

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$WFR"
DATA_TYPE = CHARACTER
START_BYTE = 807
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Frame write index
0x0000 <= x <= 0xffff (Hexadecimal) "

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$PFR"
DATA_TYPE = CHARACTER
START_BYTE = 814
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Current Frame index
0x0000 <= x <= 0xffff (Hexadecimal) "

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$RMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 821
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Mass Memory frame read index
0x0000 <= x <= 0xffff (Hexadecimal) "

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$WMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 828
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Mass Memory frame write index

```
      0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$PMMFR"
DATA_TYPE = CHARACTER
START_BYTE = 835
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "current Mass Memory frame index
      0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$IDLECNT"
DATA_TYPE = CHARACTER
START_BYTE = 842
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Idle task counter
      0x0000 <= x <= 0xffff (Hexadecimal)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$SD2STATUS"
DATA_TYPE = CHARACTER
START_BYTE = 849
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Copy of SD2 carousel status,
      0xf000 = SD2 Ready (Hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$MMDUMP"
DATA_TYPE = CHARACTER
START_BYTE = 856
BYTES = 5
UNIT = "N/A"
DESCRIPTION = "Mass Memory auto-dump
      Possible values :
      FALSE
      TRUE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TDCMODE"
DATA_TYPE = CHARACTER
START_BYTE = 864
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Mode in which the TDC is operated in (Hexadecimal) "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "$DPUADR"
DATA_TYPE = CHARACTER
START_BYTE = 871
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "First faulty address of DPU memory,
```

```
                default : 0X0000 (Hexadecimal)"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "$EODATA"
DATA_TYPE      = CHARACTER
START_BYTE     = 878
BYTES         = 5
UNIT          = "N/A"
DESCRIPTION    = "Create OCPL when MM empty,
                Possible values :
                FALSE
                TRUE"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "$EOM"
DATA_TYPE      = CHARACTER
START_BYTE     = 886
BYTES         = 5
UNIT          = "N/A"
DESCRIPTION    = "End of measurement,
                Possible values :
                FALSE
                TRUE"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "$TDCSKIP"
DATA_TYPE      = CHARACTER
START_BYTE     = 894
BYTES         = 5
UNIT          = "N/A"
DESCRIPTION    = "TDC produced time-out,
                Possible values :
                FALSE
                TRUE"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "$GCSKIP"
DATA_TYPE      = CHARACTER
START_BYTE     = 902
BYTES         = 5
UNIT          = "N/A"
DESCRIPTION    = "GC produced time-out,
                Possible values :
                FALSE
                TRUE"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "GVSTAC.RESULT"
DATA_TYPE      = CHARACTER
START_BYTE     = 910
BYTES         = 3
UNIT          = "N/A"
DESCRIPTION    = "Result of last action,
                Possible values :
                OK
                NOK"
```

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SERV_SYS_STAT"
DATA_TYPE = CHARACTER
START_BYTE = 916
BYTES = 49
UNIT = "N/A"
DESCRIPTION = "Copy of CDMS Service System Status ; see CDMS SSpec
(String of 10 word in Hexadecimal format;
each word separated by a space)"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$HKREQUEST"
DATA_TYPE = CHARACTER
START_BYTE = 968
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "HK request (hexadecimal).
Set by HK Interrupt, when frame count
reached 64 and 128"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$TIME.HIGH"
DATA_TYPE = CHARACTER
START_BYTE = 975
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "COSAC on-board time in milliseconds
after boot (most significant word, hexadecimal)."

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$TIME.LOW"
DATA_TYPE = CHARACTER
START_BYTE = 982
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "COSAC on-board time in milliseconds
after boot (least significant word, hexadecimal)."

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$SRTIMEOUTS"
DATA_TYPE = CHARACTER
START_BYTE = 989
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Number of Service Request timeouts."

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$HK32MSEC"
DATA_TYPE = CHARACTER
START_BYTE = 996
BYTES = 4
UNIT = "N/A"
DESCRIPTION = " hexadecimal"

END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SW_OFF_TIME_HIGH"
DATA_TYPE = CHARACTER
START_BYTE = 1003
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Time (most significant word) when SW will automatically
switch off any HW unit (hexadecimal)."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SW_OFF_TIME_LOW"
DATA_TYPE = CHARACTER
START_BYTE = 1010
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Time (least significant word) when SW will automatically
switch off any HW unit (hexadecimal)."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SW_IDLE_DURATION"
DATA_TYPE = CHARACTER
START_BYTE = 1017
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Constant used to calculate swOFFTime (hexadecimal)."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "\$HK_HIGH_RATE"
DATA_TYPE = CHARACTER
START_BYTE = 1024
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Flag indicating SW is configured to run in
high HK rate mode (hexadecimal)."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_INIT"
DATA_TYPE = CHARACTER
START_BYTE = 1031
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Pointer (hexadecimal) to function used during MS
initilization (SETC, wrd 8)."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "DET_TIME"
DATA_TYPE = CHARACTER
START_BYTE = 1038
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Time delay (hexadecimal) used during modification
of detector voltage (ms) (SETC, wrd 9)."
END_OBJECT = COLUMN

OBJECT = COLUMN

```

NAME           = "IE_TIME"
DATA_TYPE      = CHARACTER
START_BYTE     = 1045
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "Time delay (hexadecimal) used during modification of
                  emission current (ms) (SETC, wrd 9)"
END_OBJECT    = COLUMN

OBJECT        = COLUMN
NAME         = "PIRANI_OFFSET"
DATA_TYPE    = CHARACTER
START_BYTE   = 1052
BYTES       = 4
UNIT        = "N/A"
DESCRIPTION  = "Offset (hexadecimal) found during binary search
                  at system boot"
END_OBJECT   = COLUMN

```

4.3.2.3.5 GC Data Object Definition

The following TABLE objects are included in a complete GC measurement for flight software version previous to 1.8:

```

COSAC_CONFIG_TABLE
COSAC_FULL_HK_TABLE
COSAC_TIME_TABLE
COSAC_ADC_GC_TABLE
COSAC_GC_SPECTRUM_2_TABLE (for CODMAC level 2)
COSAC_GC_SPECTRUM_3_TABLE (for CODMAC level 3)

```

The following TABLE objects are included in a complete GC measurement for flight software version 1.8:

```

COSAC_CONFIG_TABLE
COSAC_FULL_HK_TABLE
COSAC_HK_BURST_TABLE
COSAC_GC_SPECTRUM_TABLE (for CODMAC level 2)
COSAC_GC_SPECTRUM_TABLE (for CODMAC level 3)

```

The description of the ADC_GC table:

```

OBJECT           = COSAC_ADC_GC_TABLE
NAME            = ADC_GC
INTERCHANGE_FORMAT = ASCII
ROWS           = 38
^STRUCTURE      = "COSAC_ADC_GC.FMT"
COLUMNS        = 17
ROW_BYTES       = 152
END_OBJECT      = COSAC_ADC_GC_TABLE

```

The structure of the TABLE object is described in the file COSAC_ADC_GC.FMT as follows:

```

/*           Contents of format file  "COSAC_ADC_GC.FMT"           */

/* index of the cycle, and the tag inside the cycle */
OBJECT      = COLUMN
NAME        = "CYCLE_INDEX"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 1
BYTES       = 5

```

UNIT = "N/A"
 DESCRIPTION = "Index of the cycle containing the ADC_GC_ID tag"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "INSIDE_CYCLE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 7
 BYTES = 5
 UNIT = "N/A"
 DESCRIPTION = "Index of ADC_GC_ID tag in the same cycle"
 END_OBJECT = COLUMN

/* GC (16 parameters) */

OBJECT = COLUMN
 NAME = "HE1_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 13
 BYTES = 10
 UNIT = MILLIBAR
 FORMAT = "I10"
 DESCRIPTION = "Pressure He Tank 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "HE2_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 24
 BYTES = 10
 UNIT = MILLIBAR
 FORMAT = "I10"
 DESCRIPTION = "Pressure He Tank 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "IONS_MS_PRESSURE"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 35
 BYTES = 8
 UNIT = "N/A"
 FORMAT = "I8"
 DESCRIPTION = "Pressure Ion Source MS (Hexadecimal format)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GCBOARD2_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 44
 BYTES = 8
 UNIT = KELVIN
 FORMAT = "F8.2"
 DESCRIPTION = "Temperature GC-Board2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TENAX_TEMP"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 53
 BYTES = 8
 UNIT = KELVIN

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 99

```

  FORMAT      = "F8.2"
  DESCRIPTION = "Temperature Tenax"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "HE_SEC_PRESSURE"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 62
  BYTES       = 8
  UNIT        = MILLIBAR
  FORMAT      = "F8.2"
  DESCRIPTION = "Secondary pressure HE"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "VALVE_VOLTAGE"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 71
  BYTES       = 8
  UNIT        = VOLT
  FORMAT      = "F8.2"
  DESCRIPTION = "Voltage valve unit"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "COLUMN1_TEMP"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 80
  BYTES       = 8
  UNIT        = KELVIN
  FORMAT      = "F8.2"
  DESCRIPTION = "Temperature Column 1"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "COLUMN2_TEMP"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 89
  BYTES       = 8
  UNIT        = KELVIN
  FORMAT      = "F8.2"
  DESCRIPTION = "Temperature Column 2"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "COLUMN3_TEMP"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 98
  BYTES       = 8
  UNIT        = KELVIN
  FORMAT      = "F8.2"
  DESCRIPTION = "Temperature Column 3"
  END_OBJECT  = COLUMN

OBJECT       = COLUMN
  NAME        = "COLUMN4_TEMP"
  DATA_TYPE  = ASCII_REAL
  START_BYTE  = 107
  BYTES       = 8
  UNIT        = KELVIN
  FORMAT      = "F8.2"
  
```

DESCRIPTION = "Temperature Column 4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN5_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 116
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Column 5"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN6_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 125
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Column 6"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN7_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 134
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Column 7"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN8_TEMP"
DATA_TYPE = ASCII_REAL
START_BYTE = 143
BYTES = 8
UNIT = KELVIN
FORMAT = "F8.2"
DESCRIPTION = "Temperature Column 8"
END_OBJECT = COLUMN

The description of the GC spectrum table:

For CODMAC level 2, flight software version previous to 1.8:

OBJECT = COSAC_GC_SPECTRUM_2_TABLE
NAME = GC_ID
INTERCHANGE_FORMAT = ASCII
ROWS = 4096
^STRUCTURE = "COSAC_GC_SPECTRUM_2.FMT"
COLUMNS = 8
ROW_BYTES = 98
END_OBJECT = COSAC_GC_SPECTRUM_2_TABLE

For CODMAC level 3, flight software version previous to 1.8:

OBJECT = COSAC_GC_SPECTRUM_3_TABLE
NAME = GC_ID
INTERCHANGE_FORMAT = ASCII

```

ROWS = 2048
^STRUCTURE = "COSAC_GC_SPECTRUM_3.FMT"
COLUMNS = 8
ROW_BYTES = 98
END_OBJECT = COSAC_GC_SPECTRUM_3_TABLE

```

For CODMAC level 2, flight software version 1.8:

```

OBJECT = COSAC_GC_SPECTRUM_2_FM1_8_TABLE
NAME = GC_ID
INTERCHANGE_FORMAT = ASCII
ROWS = 4096
STRUCTURE = "COSAC_GC_SPECTRUM_2_FM1_8.FMT"
COLUMNS = 12
ROW_BYTES = 162
END_OBJECT = COSAC_GC_SPECTRUM_2_FM1_8_TABLE

```

For CODMAC level 3, flight software version 1.8:

```

OBJECT = COSAC_GC_SPECTRUM_3_FM1_8_TABLE
NAME = GC_ID
INTERCHANGE_FORMAT = ASCII
ROWS = 4096
^STRUCTURE = "COSAC_GC_SPECTRUM_3_FM1_8.FMT"
COLUMNS = 12
ROW_BYTES = 162
END_OBJECT = COSAC_GC_SPECTRUM_3_FM1_8_TABLE

```

The structure of the TABLE object is described in the file COSAC_GC_SPECTRUM_2.FMT as follows:

```

/* Contents of format file "COSAC_GC_SPECTRUM_2.FMT" */
/* COSAC_GC_SPECTRUM_HEADER */

OBJECT = COLUMN
NAME = "SPECTRUM_NUMBER"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 1
BYTES = 5
DESCRIPTION = "Spectrum Number"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COLUMN_NUMBER"
DATA_TYPE = CHARACTER
START_BYTE = 8
BYTES = 19
DESCRIPTION = "Column Number for this Spectrum "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SPECTRUM_LOBT"
DATA_TYPE = CHARACTER
START_BYTE = 30
BYTES = 14
DESCRIPTION = "Spectrum LOBT ; LOBT IS REPRESENTED AS :
Reset number (integer starting at 1) / seconds.
Reset number 1 starts at 2003-01-01T00:00:00 UTC
The time resolution is 0.03125 s"
END_OBJECT = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "SPECTRUM.UTC"
  DATA_TYPE    = TIME
  START_BYTE    = 46
  BYTES         = 23
  DESCRIPTION   = "Spectrum UTC"
END_OBJECT      = COLUMN

```

```
/* COSAC_GC_SPECTRUM          */
```

```

OBJECT          = COLUMN
  NAME          = "X_LOW"
  DATA_TYPE    = ASCII_REAL
  START_BYTE    = 70
  BYTES         = 8
  UNIT         = "N/A"
  FORMAT        = "F8.6"
  DESCRIPTION   = "X low resolution"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "Y_LOW"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 79
  BYTES         = 4
  UNIT         = "N/A"
  DESCRIPTION   = "Y Low resolution"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "X_HIGH"
  DATA_TYPE    = ASCII_REAL
  START_BYTE    = 84
  BYTES         = 8
  UNIT         = "N/A"
  FORMAT        = "F8.6"
  DESCRIPTION   = "X High resolution"
END_OBJECT      = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "Y_HIGH"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 93
  BYTES         = 4
  UNIT         = "N/A"
  DESCRIPTION   = "Y High resolution"
END_OBJECT      = COLUMN

```

The structure of the TABLE object is described in the file COSAC_GC_SPECTRUM_3.FMT as follows:

```
/*          Contents of format file  "COSAC_GC_SPECTRUM_3.FMT"          */
```

```
/* COSAC_GC_SPECTRUM_HEADER */
```

```

OBJECT          = COLUMN
  NAME          = "SPECTRUM_NUMBER"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 1

```

```

    BYTES = 5
    DESCRIPTION = "Spectrum Number"
  END_OBJECT = COLUMN

OBJECT = COLUMN
  NAME = "COLUMN_NUMBER"
  DATA_TYPE = CHARACTER
  START_BYTE = 8
  BYTES = 19
  DESCRIPTION = "Column Number for this Spectrum "
  END_OBJECT = COLUMN

OBJECT = COLUMN
  NAME = "SPECTRUM_LOBT"
  DATA_TYPE = CHARACTER
  START_BYTE = 30
  BYTES = 14
  DESCRIPTION = "Spectrum LOBT ; LOBT IS REPRESENTED AS :
    Reset number (integer starting at 1) / seconds.
    Reset number 1 starts at 2003-01-01T00:00:00 UTC
    The time resolution is 0.03125 s"
  END_OBJECT = COLUMN

OBJECT = COLUMN
  NAME = "SPECTRUM.UTC"
  DATA_TYPE = TIME
  START_BYTE = 46
  BYTES = 23
  DESCRIPTION = "Spectrum UTC"
  END_OBJECT = COLUMN

/* COSAC_GC_SPECTRUM */

OBJECT = COLUMN
  NAME = "X_LOW"
  DATA_TYPE = ASCII_REAL
  START_BYTE = 70
  BYTES = 8
  UNIT = "SECOND"
  FORMAT = "F8.6"
  DESCRIPTION = "Time relative to spectrum start time for
    low resolution"
  END_OBJECT = COLUMN

OBJECT = COLUMN
  NAME = "Y_LOW"
  DATA_TYPE = ASCII_INTEGER
  START_BYTE = 79
  BYTES = 4
  UNIT = "N/A"
  DESCRIPTION = "Y Low resolution"
  END_OBJECT = COLUMN

OBJECT = COLUMN
  NAME = "X_HIGH"
  DATA_TYPE = ASCII_REAL
  START_BYTE = 84
  BYTES = 8
  UNIT = "SECOND"
  FORMAT = "F8.6"
  DESCRIPTION = "Time relative to spectrum start time for

```

```

                                high resolution"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "Y_HIGH"
  DATA_TYPE                     = ASCII_INTEGER
  START_BYTE                     = 93
  BYTES                          = 4
  UNIT                          = "N/A"
  DESCRIPTION                    = "Y High resolution"
END_OBJECT                      = COLUMN

```

The structure of the TABLE object is described in the file COSAC_GC_SPECTRUM_2_FM1_8.FMT as follows:

```

/*      Contents of format file  "COSAC_GC_SPECTRUM_2_FM1_8.FMT"      */
/* valid for flight software V 1.8 uploaded at PC 10,                */
/* 2009-09-23T22:00:00 UTC                                           */
/* COSAC_GC_SPECTRUM_HEADER */

OBJECT                          = COLUMN
  NAME                          = "SPECTRUM_NUMBER"
  DATA_TYPE                     = ASCII_INTEGER
  START_BYTE                     = 1
  BYTES                          = 5
  DESCRIPTION                    = "Spectrum Number"
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "COLUMN_NUMBER"
  DATA_TYPE                     = CHARACTER
  START_BYTE                     = 8
  BYTES                          = 19
  DESCRIPTION                    = "Column Number for this Spectrum "
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "UTC_INJ"
  DATA_TYPE                     = TIME
  START_BYTE                     = 29
  BYTES                          = 23
  DESCRIPTION                    = "GC injection time (UTC in PDS standard format
                                YYYY-MM-DDThh:mm:ss.sss) "
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "UTC_START"
  DATA_TYPE                     = TIME
  START_BYTE                     = 53
  BYTES                          = 23
  DESCRIPTION                    = "GC measurement start time (UTC in PDS standard
                                format YYYY-MM-DDThh:mm:ss.sss) "
END_OBJECT                      = COLUMN

OBJECT                          = COLUMN
  NAME                          = "UTC_END"
  DATA_TYPE                     = TIME
  START_BYTE                     = 77
  BYTES                          = 23

```

```
DESCRIPTION = "GC measurement end time (UTC in PDS standard
END_OBJECT = COLUMN
format YYYY-MM-DDThh:mm:ss.sss)"

OBJECT = COLUMN
NAME = "COBT_INJ"
DATA_TYPE = CHARACTER
START_BYTE = 102
BYTES = 8
DESCRIPTION = "GC injection COSAC on-board time (hexadecimal).
COBT replaces the LOBT in certain places used in
previous versions of the science data stream. Its
resolution is 1ms."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COBT_START"
DATA_TYPE = CHARACTER
START_BYTE = 113
BYTES = 8
DESCRIPTION = "GC measurement start time as COSAC on-board time
(hexadecimal).COBT replaces the LOBT in certain
places used in previous versions of the science
data stream. Its resolution is 1ms."
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "COBT_END"
DATA_TYPE = CHARACTER
START_BYTE = 124
BYTES = 8
DESCRIPTION = "GC measurement end time as COSAC on-board time
(hexadecimal).COBT replaces the LOBT in certain
places used in previous versions of the science
data stream. Its resolution is 1ms."
END_OBJECT = COLUMN

/* COSAC_GC_SPECTRUM */

OBJECT = COLUMN
NAME = "X_LOW"
DATA_TYPE = ASCII_REAL
START_BYTE = 134
BYTES = 10
UNIT = "N/A"
FORMAT = "F10.3"
DESCRIPTION = "X low resolution"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Y_LOW"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 145
BYTES = 4
UNIT = "N/A"
DESCRIPTION = "Y Low resolution"
END_OBJECT = COLUMN

OBJECT = COLUMN
```

```

NAME                = "X_HIGH"
DATA_TYPE           = ASCII_REAL
START_BYTE         = 150
BYTES              = 10
UNIT               = "N/A"
FORMAT             = "F10.3"
DESCRIPTION        = "X High resolution"
END_OBJECT         = COLUMN

```

```

OBJECT             = COLUMN
NAME              = "Y_HIGH"
DATA_TYPE         = ASCII_INTEGER
START_BYTE       = 161
BYTES            = 4
UNIT             = "N/A"
DESCRIPTION      = "Y High resolution"
END_OBJECT       = COLUMN

```

The structure of the TABLE object is described in the file COSAC_GC_SPECTRUM_3_FM1_8.FMT as follows:

```

/*          Contents of format file  "COSAC_GC_SPECTRUM_3FM1_8.FMT"  */
/* valid for flight software V 1.8 uploaded at PC 10,                */
/* 2009-09-23T22:00:00 UTC                                           */

```

```

/* COSAC_GC_SPECTRUM_HEADER */

```

```

OBJECT             = COLUMN
NAME              = "SPECTRUM_NUMBER"
DATA_TYPE         = ASCII_INTEGER
START_BYTE       = 1
BYTES            = 5
DESCRIPTION      = "Spectrum Number"
END_OBJECT       = COLUMN

```

```

OBJECT             = COLUMN
NAME              = "COLUMN_NUMBER"
DATA_TYPE         = CHARACTER
START_BYTE       = 8
BYTES            = 19
DESCRIPTION      = "Column Number for this Spectrum "
END_OBJECT       = COLUMN

```

```

OBJECT             = COLUMN
NAME              = "UTC_INJ"
DATA_TYPE         = TIME
START_BYTE       = 29
BYTES            = 23
DESCRIPTION      = "GC injection time (UTC in PDS standard format
                    YYYY-MM-DDThh:mm:ss.sss) "
END_OBJECT       = COLUMN

```

```

OBJECT             = COLUMN
NAME              = "UTC_START"
DATA_TYPE         = TIME
START_BYTE       = 53
BYTES            = 23
DESCRIPTION      = "GC measurement start time (UTC in PDS
                    standard format YYYY-MM-DDThh:mm:ss.sss) "

```

```

END_OBJECT          = COLUMN

OBJECT              = COLUMN
  NAME              = "UTC_END"
  DATA_TYPE        = TIME
  START_BYTE        = 77
  BYTES             = 23
  DESCRIPTION       = "GC measurement end time (UTC in PDS standard
                      format YYYY-MM-DDThh:mm:ss.sss)"
END_OBJECT          = COLUMN

OBJECT              = COLUMN
  NAME              = "COBT_INJ"
  DATA_TYPE        = CHARACTER
  START_BYTE        = 102
  BYTES             = 8
  DESCRIPTION       = "GC injection COSAC on-board time (hexadecimal).
                      COBT replaces the LOBT in certain places used in
                      previous versions of the science data stream. Its
                      resolution is lms."
END_OBJECT          = COLUMN

OBJECT              = COLUMN
  NAME              = "COBT_START"
  DATA_TYPE        = CHARACTER
  START_BYTE        = 113
  BYTES             = 8
  DESCRIPTION       = "GC measurement start time as COSAC on-board time
                      (hexadecimal).COBT replaces the LOBT in certain
                      places used in previous versions of the science
                      data stream. Its resolution is lms."
END_OBJECT          = COLUMN

OBJECT              = COLUMN
  NAME              = "COBT_END"
  DATA_TYPE        = CHARACTER
  START_BYTE        = 124
  BYTES             = 8
  DESCRIPTION       = "GC measurement end time as COSAC on-board time
                      (hexadecimal).COBT replaces the LOBT in certain
                      places used in previous versions of the science
                      data stream. Its resolution is lms."
END_OBJECT          = COLUMN

/*  COSAC_GC_SPECTRUM          */

OBJECT              = COLUMN
  NAME              = "X_LOW"
  DATA_TYPE        = ASCII_REAL
  START_BYTE        = 134
  BYTES             = 10
  UNIT              = "SECOND"
  FORMAT            = "F10.3"
  DESCRIPTION       = "Time relative to spectrum start time for
                      low resolution"
END_OBJECT          = COLUMN

OBJECT              = COLUMN
  NAME              = "Y_LOW"
  DATA_TYPE        = ASCII_INTEGER

```



```

START_BYTE      = 145
BYTES           = 4
UNIT            = "N/A"
DESCRIPTION     = "Y Low resolution"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
NAME           = "X_HIGH"
DATA_TYPE      = ASCII_REAL
START_BYTE     = 150
BYTES         = 10
UNIT          = "SECOND"
FORMAT       = "F10.3"
DESCRIPTION  = "Time relative to spectrum start time for
                high resolution"
END_OBJECT    = COLUMN

OBJECT          = COLUMN
NAME           = "Y_HIGH"
DATA_TYPE      = ASCII_INTEGER
START_BYTE     = 161
BYTES         = 4
UNIT          = "N/A"
DESCRIPTION    = "Y High resolution"
END_OBJECT     = COLUMN

```

4.3.2.3.6 MS Data Object Definition

The following TABLE objects are included in a complete MS measurement for flight software version previous to 1.8:

```

COSAC_CONFIG_TABLE
COSAC_FULL_HK_TABLE
COSAC_ADC_MS_TABLE
COSAC_TIME_ID_TABLE
COSAC_MS_SPECTRUM_2_TABLE (for CODMAC 2)
COSAC_MS_SPECTRUM_3_TABLE (for CODMAC 3)

```

The following TABLE objects are included in a complete MS measurement for flight software version 1.8:

```

COSAC_CONFIG_TABLE
COSAC_FULL_HK_TABLE
COSAC_HK_BURST_TABLE
COSAC_MS_SPECTRUM_2_TABLE (for CODMAC 2)
COSAC_MS_SPECTRUM_3_TABLE (for CODMAC 3)

```

The description of the ADC_MS table (the table name contains the ADC readout number):

```

OBJECT          = COSAC_ADC_MS_TABLE
NAME           = ADC_MS
INTERCHANGE_FORMAT = ASCII
ROWS          = 46
^STRUCTURE     = "COSAC_ADC_MS.FMT"
COLUMNS       = 16
ROW_BYTES     = 139
END_OBJECT     = COSAC_ADC_MS_TABLE

```

The structure of the TABLE object is described in the file COSAC_ADC_MS.FMT as follows:

```

/*          Contents of format file  "COSAC_ADC_MS.FMT"

```

```

*/

```

```

/* index of the cycle, and the tag inside the cycle */
OBJECT      = COLUMN
NAME        = "CYCLE_INDEX"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 1
BYTES       = 5
UNIT        = "N/A"
DESCRIPTION = "Index of the cycle containing the ADC_MS_ID tag"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "INSIDE_CYCLE"
DATA_TYPE   = ASCII_INTEGER
START_BYTE  = 7
BYTES       = 5
UNIT        = "N/A"
DESCRIPTION = "Index of ADC_MS_ID tag in the same cycle"
END_OBJECT  = COLUMN
/* ..... MS (16 parameters) ..... */

OBJECT      = COLUMN
NAME        = "PIPEA_M_TEMP"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 13
BYTES       = 8
UNIT        = KELVIN
FORMAT      = "F8.2"
DESCRIPTION = "Temperature Pipe a (main)"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "PIPEB_M_TEMP"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 22
BYTES       = 8
UNIT        = KELVIN
FORMAT      = "F8.2"
DESCRIPTION = "Temperature Pipe b (side)"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "OVEN_TEMP"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 31
BYTES       = 8
UNIT        = KELVIN
FORMAT      = "F8.2"
DESCRIPTION = "Temperature Oven"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "MSEBOX_TEMP"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 40
BYTES       = 8
UNIT        = KELVIN
FORMAT      = "F8.2"
DESCRIPTION = "Temperature MS-EBox"
END_OBJECT  = COLUMN
    
```

OBJECT = COLUMN
NAME = "CALGAS_PRESSURE"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 49
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "Pressure Calibration Gas"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_POSITION"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 58
BYTES = 8
UNIT = "N/A"
FORMAT = "I8"
DESCRIPTION = "Position Tapping Station
Open >= 4500,
OT (Oberer Totpunkt/Top dead centre) ~ 4710,
UT (Unterer Totpunkt/bottom dead centre) ~ 1330)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "EMISSION_CURRENT"
DATA_TYPE = ASCII_REAL
START_BYTE = 67
BYTES = 8
UNIT = NANOAMPERE
FORMAT = "F8.2"
DESCRIPTION = "Emission current"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV1_DET_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 76
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "MS HV 1, U detector"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV2_REFL2_4_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 85
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"
DESCRIPTION = "MS HV 2, U reflector2_4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_HV3_REFL2_V"
DATA_TYPE = ASCII_REAL
START_BYTE = 94
BYTES = 8
UNIT = VOLT
FORMAT = "F8.2"

DESCRIPTION = "MS HV 3, U reflector 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV4_REFL1_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 103
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 4, U reflector 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV5_LENSE2_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 112
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 5, U lense 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV6_LENSE1_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 121
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 6, U lense 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV7_G3_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 130
 BYTES = 8
 UNIT = VOLT
 FORMAT = "F8.2"
 DESCRIPTION = "MS HV 7, U G3"
 END_OBJECT = COLUMN

The description of the MS spectrum table for flight software version previous to 1.8 (the table name contains the spectrum number):

For CODMAC level 2:

OBJECT = COSAC_MS_SPECTRUM_2_TABLE
 NAME = MS_ID
 INTERCHANGE_FORMAT = ASCII
 ROWS = 16000
 ^STRUCTURE = "COSAC_MS_SPECTRUM_2.FMT"
 COLUMNS = 5
 ROW_BYTES = 66
 END_OBJECT = COSAC_MS_SPECTRUM_2_TABLE

For CODMAC level 3:

```

OBJECT          = COSAC_MS_SPECTRUM_3_TABLE
  NAME          = MS_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS          = 16000
  ^STRUCTURE    = "COSAC_MS_SPECTRUM_3.FMT"
  COLUMNS      = 5
  ROW_BYTES     = 66
END_OBJECT      = COSAC_MS_SPECTRUM_3_TABLE
  
```

The structure of the TABLE object is described in the file COSAC_MS_SPECTRUM_2.FMT as follows:

```

/* Contents of format file "COSAC_MS_SPECTRUM_2.FMT" */
/* COSAC_MS_SPECTRUM_HEADER */

OBJECT          = COLUMN
  NAME          = "SPECTRUM_NUMBER"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 1
  BYTES         = 5
  DESCRIPTION   = "Spectrum Number"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
  NAME          = "SPECTRUM_LOBT"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 8
  BYTES         = 14
  DESCRIPTION   = "Spectrum LOBT ; LOBT is represented as :
                  Reset number (integer starting at 1) / seconds.
                  Reset number 1 starts at 2003-01-01T00:00:00 UTC
                  The time resolution is 0.03125 s"
END_OBJECT      = COLUMN

OBJECT          = COLUMN
  NAME          = "SPECTRUM.UTC"
  DATA_TYPE    = TIME
  START_BYTE    = 24
  BYTES         = 23
  DESCRIPTION   = "Spectrum UTC"
END_OBJECT      = COLUMN

/* COSAC_MS_SPECTRUM */
/*

OBJECT          = COLUMN
  NAME          = "CHANNEL_NUMBER"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 48
  BYTES         = 8
  UNIT          = "N/A"
  DESCRIPTION   = "Channel Number "
END_OBJECT      = COLUMN

OBJECT          = COLUMN
  NAME          = "COUNT"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 57
  BYTES         = 8
  UNIT          = "N/A"
  
```

DESCRIPTION = "Number of counts"
 END_OBJECT = COLUMN

The structure of the TABLE object is described in the file COSAC_MS_SPECTRUM_3.FMT as follows:

```

/*          Contents of format file  "COSAC_MS_SPECTRUM_3.FMT"          */
/* COSAC_MS_SPECTRUM_HEADER */

OBJECT      = COLUMN
  NAME      = "SPECTRUM_NUMBER"
  DATA_TYPE = ASCII_INTEGER
  START_BYTE = 1
  BYTES     = 5
  DESCRIPTION = "Spectrum Number"
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  NAME      = "SPECTRUM_LOBT"
  DATA_TYPE = CHARACTER
  START_BYTE = 8
  BYTES     = 14
  DESCRIPTION = "Spectrum LOBT ; LOBT is represented as :
                Reset number (integer starting at 1) / seconds.
                Reset number 1 starts at 2003-01-01T00:00:00 UTC
                The time resolution is 0.03125 s"
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  NAME      = "SPECTRUM.UTC"
  DATA_TYPE = TIME
  START_BYTE = 24
  BYTES     = 23
  DESCRIPTION = "Spectrum UTC"
  END_OBJECT = COLUMN

/* COSAC_MS_SPECTRUM          */

OBJECT      = COLUMN
  NAME      = "MASS"
  DATA_TYPE = ASCII_REAL
  START_BYTE = 48
  BYTES     = 8
  FORMAT    = "F15.6"
  UNIT      = "?????"
  DESCRIPTION = "Atomic Mass unit per charge (amu/q) "
  END_OBJECT = COLUMN

OBJECT      = COLUMN
  NAME      = "COUNT"
  DATA_TYPE = ASCII_INTEGER
  START_BYTE = 57
  BYTES     = 8
  UNIT      = "N/A"
  DESCRIPTION = "Counts"
  END_OBJECT = COLUMN

```

The description of the MS spectrum table for flight software version 1.8 (the table name contains the spectrum number):

For CODMAC level 2:

```

OBJECT          = COSAC_MS_SPECTRUM_2_TABLE
  NAME          = MS_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS          = 16000
  ^STRUCTURE   = "COSAC_MS_SPECTRUM_2_FM1_8.FMT"
  COLUMNS     = 5
  ROW_BYTES    = 60
END_OBJECT     = COSAC_MS_SPECTRUM_2_TABLE

```

For CODMAC level 3:

```

OBJECT          = COSAC_MS_SPECTRUM_3_TABLE
  NAME          = MS_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS          = 16000
  ^STRUCTURE   = "COSAC_MS_SPECTRUM_3_FM1_8.FMT"
  COLUMNS     = 5
  ROW_BYTES    = 60
END_OBJECT     = COSAC_MS_SPECTRUM_3_TABLE

```

The structure of the TABLE object is described in the file COSAC_MS_SPECTRUM_2_FM1_8.FMT as follows:

```

/* Contents of format file "COSAC_MS_SPECTRUM_2_FM1_8.FMT" */
/* valid for flight software V 1.8 uploaded at PC 10, */
/* 2009-09-23T22:00:00 UTC */

```

```

/* COSAC_MS_SPECTRUM_HEADER */

```

```

OBJECT          = COLUMN
  NAME          = "SPECTRUM_NUMBER"
  DATA_TYPE    = ASCII_INTEGER
  START_BYTE    = 1
  BYTES        = 5
  DESCRIPTION   = "Spectrum Number"
END_OBJECT     = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "SPECTRUM_UTC"
  DATA_TYPE    = TIME
  START_BYTE    = 7
  BYTES        = 23
  DESCRIPTION   = " UTC in PDS standard format
                  YYYY-MM-DDThh:mm:ss.sss"
END_OBJECT     = COLUMN

```

```

OBJECT          = COLUMN
  NAME          = "SPECTRUM_COBT"
  DATA_TYPE    = CHARACTER
  START_BYTE    = 32
  BYTES        = 8
  DESCRIPTION   = "Spectrum COSAC on Board Time (hexadecimal).
                  COBT replaces the LOBT in certain places used in
                  previous versions of the science data stream. Its

```

resolution is 1ms."
 END_OBJECT = COLUMN

/* COSAC_MS_SPECTRUM */

OBJECT = COLUMN
 NAME = "CHANNEL_NUMBER"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 42
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "Channel Number "
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "COUNT"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 51
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "Number of counts"
 END_OBJECT = COLUMN

The structure of the TABLE object is described in the file COSAC_MS_SPECTRUM_3_FM1_8.FMT as follows:

```
/* Contents of format file "COSAC_MS_SPECTRUM_3_FM1_8.FMT" */
/* valid for flight software V 1.8 uploaded at PC 10, */
/* 2009-09-23T22:00:00 UTC */
```

/* COSAC_MS_SPECTRUM_HEADER */

OBJECT = COLUMN
 NAME = "SPECTRUM_NUMBER"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 1
 BYTES = 5
 DESCRIPTION = "Spectrum Number"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "SPECTRUM_UTC"
 DATA_TYPE = TIME
 START_BYTE = 7
 BYTES = 23
 DESCRIPTION = " UTC in PDS standard format
 YYYY-MM-DDThh:mm:ss.sss"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "SPECTRUM_COBT"
 DATA_TYPE = CHARACTER
 START_BYTE = 32


```

  BYTES = 8
  DESCRIPTION = "Spectrum COSAC on Board Time (hexadecimal).
                COBT replaces the LOBT in certain places used in
                previous versions of the science data stream. Its
                resolution is 1ms."
  END_OBJECT = COLUMN
/* COSAC_MS_SPECTRUM */
OBJECT = COLUMN
  NAME = "MASS"
  DATA_TYPE = ASCII_REAL
  START_BYTE = 42
  BYTES = 8
  FORMAT = "F8.3"
  UNIT = "u/(A*s)"
  DESCRIPTION = "Atomic Mass unit per charge (amu/q) "
  END_OBJECT = COLUMN
OBJECT = COLUMN
  NAME = "COUNT"
  DATA_TYPE = ASCII_INTEGER
  START_BYTE = 51
  BYTES = 8
  UNIT = "N/A"
  DESCRIPTION = "Counts"
  END_OBJECT = COLUMN

```

4.3.2.3.7 GC/MS Data Object Definition

The following TABLE objects are included in a complete GCMS measurement for flight software version previous to 1.8:

```

CONFIG_TABLE
FULL_HK_TABLE
ADC_GC_TABLE
ADC_MS_TABLE
TIME_ID_TABLE

```

```

MS_SPECTRUM_TABLE_2 (CODMAC level 2)
GC_SPECTRUM_TABLE_2 (CODMAC LEVEL 2)
MS_SPECTRUM_TABLE_3 (CODMAC level 3)
GC_SPECTRUM_TABLE_3 (CODMAC LEVEL 3)

```

The following TABLE objects are included in a complete GCMS measurement for flight software version 1.8:

```

CONFIG_TABLE
FULL_HK_TABLE
HK_BURST_TABLE

```

```

MS_SPECTRUM_2_TABLE (for CODMAC 2)
MS_SPECTRUM_3_TABLE (for CODMAC 3)
GC_SPECTRUM_2_TABLE (for CODMAC 2)
GC_SPECTRUM_3_TABLE (for CODMAC 3)

```

The GC and MS spectra are described in the previous paragraphs.

4.3.2.4 Description of Instrument

N/A

4.3.2.5 Parameters Index File Definition

N/A

4.3.2.6 Mission Specific Keywords

4.3.2.6.1 Instrument Specific Keywords

N/A

4.3.2.6.2 Sample Tracking Specific Keywords

These keywords has been defined to track the cometary material drilled and distributed by SD2 system. They are N/A during the cruise.

ROSETTA : SD2_OVEN_FILLING

- **Type:** character
- **Standard values:** "YES" or "NO"
- **Description:** filling conditions of the pictured oven as deduced from the SD2 data

ROSETTA : SD2_DRILL_DEPTH

- **Type:** real, unit mm
- **Standard values:** refer to SD2 data (or missing value)
- **Description:** depth of the drilling process as deduced from the SD2 data

ROSETTA : SD2_OVEN_NUMBER

- **Type:** integer
- **Standard values:** 1 to 26 or 99 (missing data)
- **Description:** number of the oven filled by the SD2 system

ROSETTA : SD2_OVEN_TYPE

- **Type:** character
- **Standard values:** "MTO" or "HTO"
- **Description:** type of the oven filled by the SD2 system (Medium Temperature Oven or High Temperature Oven)

ROSETTA : SAMPLE_TAPPING

- **Type:** character
- **Standard values:** "YES" or "NO" or "N/A"
- **Description:** tapping conditions of the pictured oven as deduced from the PTOLEMY or COSAC data

ROSETTA : SAMPLE_NUMBER

- **Type:** integer
- **Standard values:** 1, 2,...or missing value
- **Description:** number of number of sample (1 for the first sample of the mission and n+1 for the following ones)

ROSETTA : SAMPLE_VOLUME

- **Type:** real, mm³
- **Standard values:** from Volume Checker
- **Description:** amount of sample discharged into the oven from the Volume Checker data

4.3.3 Data Product Design of Calibrated HK Data (Level 3)

Level 3 HK contains calibrated COSAC housekeeping data with PDS detached labels.

4.3.3.1 File Characteristics Data Elements

The PDS file characteristic data elements for COSAC calibrated housekeeping data (level 3) are:

```
RECORD_TYPE           = FIXED_LENGTH
RECORD_BYTES          = 366
FILE_RECORDS          = 40
PRODUCT_TYPE          = RDR
PROCESSING_LEVEL_ID   = 1
```

4.3.3.2 Data Object Pointers Identification Data Elements

The calibrated HK data are organized as an ASCII table with comma separated values (CSV). The PDS label refers to a single data object which is a TABLE. The data object pointers (^TABLE) reference CSV files.

4.3.3.3 Instrument and Detector Descriptive Data Elements

N/A

4.3.3.4 Structure Definition of Instrument Parameter Objects

N/A

4.3.3.5 Data Object Definition

The description of the calibrated HK table:

The structure of the TABLE object is described in the file COSAC_CALIBRATED_HK.FMT as follows:

```
/*           Contents of format file  "COSAC_CALIBRATED_HK.FMT"           */
/*           ..... DPU .....                                           */

OBJECT      = COLUMN
NAME        = "p5V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 1
BYTES       = 8
UNIT        = MILLIAMPERE
DESCRIPTION = "CURRENT +5V LINE"
END_OBJECT  = COLUMN

OBJECT      = COLUMN
NAME        = "m5V_C"
DATA_TYPE   = ASCII_REAL
START_BYTE  = 10
BYTES       = 8
UNIT        = MILLIAMPERE
DESCRIPTION = "CURRENT -5V LINE"
END_OBJECT  = COLUMN
```

OBJECT = COLUMN
NAME = "p12V_C"
DATA_TYPE = ASCII_REAL
START_BYTE = 19
BYTES = 8
UNIT = MILLIAMPERE
DESCRIPTION = "CURRENT +12V LINE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "m12V_C"
DATA_TYPE = ASCII_REAL
START_BYTE = 28
BYTES = 8
UNIT = MILLIAMPERE
DESCRIPTION = "CURRENT -12V LINE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "System_power"
DATA_TYPE = ASCII_REAL
START_BYTE = 37
BYTES = 8
UNIT = WATT
DESCRIPTION = "SYSTEM POWER "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_ADC_Input"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 46
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "GC ADC INPUT"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_ADC_Input"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 55
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "MS ADC INPUT"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan7_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 64
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 7"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan8_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 73
BYTES = 8
UNIT = "N/A"

COSAC EAICD

Document No. : COSAC EAICD
Issue/Rev. No. : 1/2
Date : 09 Feb. 2017
Page : 120

DESCRIPTION = "DPU MUX CHANNEL 8"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan9_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 82
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 9"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan10_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 91
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 10"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan11_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 100
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 11"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan12_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 109
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 12 "
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan13_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 118
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 13"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Chan14_DPU_Mux"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 127
BYTES = 8
UNIT = "N/A"
DESCRIPTION = "DPU MUX CHANNEL 14"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "DPU_Voltage"
DATA_TYPE = ASCII_REAL

START_BYTE = 136
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "VOLTAGE DPU"
 END_OBJECT = COLUMN

/* GC */

OBJECT = COLUMN
 NAME = "He1_Pressure"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 145
 BYTES = 10
 UNIT = PASCAL
 DESCRIPTION = "Pressure He Tank 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "He2_Pressure"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 156
 BYTES = 10
 UNIT = PASCAL
 DESCRIPTION = "Pressure He Tank 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "IonS_MS_Pressure"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 167
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "Pressure Ion Source MS (Hexadecimal format)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "GCBoard2_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 176
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature GC-Board2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Tenax_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 185
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Tenax"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "He_Sec_Pressure"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 194
 BYTES = 8
 UNIT = PASCAL
 DESCRIPTION = "Secondary pressure HE)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Valve_Voltage"
DATA_TYPE = ASCII_REAL
START_BYTE = 203
BYTES = 8
UNIT = VOLT
DESCRIPTION = "Voltage valve unit"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column1_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 212
BYTES = 8
UNIT = KELVIN
DESCRIPTION = "Temperature Column 1)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column2_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 221
BYTES = 8
UNIT = KELVIN
DESCRIPTION = "Temperature Column 2"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column3_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 230
BYTES = 8
UNIT = KELVIN
DESCRIPTION = "Temperature Column 3"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column4_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 239
BYTES = 8
UNIT = KELVIN
DESCRIPTION = "Temperature Column 4"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column5_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 248
BYTES = 8
UNIT = KELVIN
DESCRIPTION = "Temperature Column 5"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Column6_Temp"
DATA_TYPE = ASCII_REAL
START_BYTE = 257
BYTES = 8
UNIT = KELVIN

DESCRIPTION = "Temperature Column 6"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Column7_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 266
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Column 7"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Column8_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 275
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Column 8)"
 END_OBJECT = COLUMN

/* MS */

OBJECT = COLUMN
 NAME = "PipeA_m_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 284
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Pipe a (main)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "PipeB_m_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 293
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Pipe b (side)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Oven_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 302
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature Oven"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MSEBox_Temp"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 311
 BYTES = 8
 UNIT = KELVIN
 DESCRIPTION = "Temperature MS-EBox)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "CalGas_Pressure"

COSAC EAICD

Document No. : COSAC EAICD
 Issue/Rev. No. : 1/2
 Date : 09 Feb. 2017
 Page : 124

DATA_TYPE = ASCII_INTEGER
 START_BYTE = 320
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "Pressure Calibration Gas"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "TPST_Position"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 329
 BYTES = 8
 UNIT = "N/A"
 DESCRIPTION = "Position Tapping Station
 Open >= 4500,
 OT (Oberer Totpunkt/Top dead centre) ~ 4710,
 UT (Unterer Totpunkt/bottom dead centre) ~ 1330)"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Emission_Current"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 338
 BYTES = 8
 UNIT = NANOAMPERE
 DESCRIPTION = "Emission current"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV1_det_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 347
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 1, U detector"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV2_refl2_4_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 356
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 2, U reflector2_4"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV3_refl2_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 365
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 3, U reflector 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV4_refl1_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 374
 BYTES = 8
 UNIT = VOLT

DESCRIPTION = "MS HV 4, U reflector 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV5_lense2_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 383
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 5, U lense 2"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV6_lense1_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 392
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 6, U lense 1"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "MS_HV7_G3_V"
 DATA_TYPE = ASCII_REAL
 START_BYTE = 401
 BYTES = 8
 UNIT = VOLT
 DESCRIPTION = "MS HV 7, U G3"
 END_OBJECT = COLUMN

/* OS */

OBJECT = COLUMN
 NAME = "Rec_CDMS_Msg"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 410
 BYTES = 6
 UNIT = "N/A"
 DESCRIPTION = "Counter for received CDMS messages"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Trans_CDMS_Msg"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 417
 BYTES = 6
 UNIT = "N/A"
 DESCRIPTION = "Counter for transmit CDMS messages"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Stat_CDMS_Msg"
 DATA_TYPE = ASCII_INTEGER
 START_BYTE = 424
 BYTES = 6
 UNIT = "N/A"
 DESCRIPTION = "Counter for CDMS status messages"
 END_OBJECT = COLUMN

OBJECT = COLUMN
 NAME = "Stored_Msg"

DATA_TYPE = ASCII_INTEGER
START_BYTE = 431
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "Counter for stored messages (TCs)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "RERC_Msg"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 438
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "Counter for RERC messages"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Last_SSIF_error"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 445
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "Last received Subsystem Interface error code)"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_high"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 452
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "LOBT, high"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "LOBT_low"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 459
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "LOBT, low"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "BRAM_pointer"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 466
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "BackupRAM pointer"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "PHeCopy"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 473
BYTES = 6
UNIT = " PASCAL "
DESCRIPTION = "copy of Pressure HE"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "MS_Cycles"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 480
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "MS cycles"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "GC_Cycles"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 487
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "GC cycles"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SysStatus2"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 494
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "System Status 2
Single Shot Valve: b01 = armed, b11 = fired
HK auto collection: 0 = disabled, 1 = enabled
MM dump: 0 = idle, 1 = in progress
MM auto dump: 0 = disabled, 1 = enabled"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "SysStatus1"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 501
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "System Status 1
Configuration valid: bxx1 = TPST, bx1x = MS, b1xx = GC
Continue Flag (not supported)
Waiting flag (not supported)
System Mode: b000 = idle, b001 = GC, b010=MS, b011=GCMS, b100 = Self test
Power Switch: bxxx1=pws1, bxx1x=pws2, bx1xx=pws3 (not used), b1xxx = pws4
Mass Memory: 0 = off, 1 = on
EEPROM Timestamp: 0 = okay, 1 = mismatch
TPST direction changed: 0 = false, 1 = true
SD2 ready flag: 0 = false, 1 = true"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "Error_Msg"
DATA_TYPE = ASCII_INTEGER
START_BYTE = 508
BYTES = 6
UNIT = "N/A"
DESCRIPTION = "Error Message"
END_OBJECT = COLUMN

OBJECT = COLUMN
NAME = "TPST_last"
DATA_TYPE = ASCII_INTEGER

```

START_BYTE = 515
BYTES      = 6
UNIT       = "N/A"
DESCRIPTION = "Last read position of TPST"
END_OBJECT = COLUMN
  
```

4.3.3.6 Description of Instrument

N/A

4.3.3.7 Parameters Index File Definition

N/A

4.3.3.8 Mission Specific Keywords

N/A

5 Appendix A : Available Software to read PDS files

The level 3 housekeeping and science PDS files can be read with the PDS table verifier tool "tbtool" and readpds (Small Bodies Node tool).

6 Appendix B : Example of PDS combined detached label for COSAC GC level 2 data product (version previous to 1.8)

```

PDS_VERSION_ID          = PDS3
LABEL_REVISION_NOTE    = "2007-07-16, SONC, version 1.0"
/* PVV version 3.0 */

/*          GC measurements (Level 2)          */

DATA_SET_ID             = "RL-E-COSAC-2-EAR2-V1.0"
DATA_SET_NAME           = "ROSETTA-LANDER EARTH COSAC 2 EAR2 V1.0"
PRODUCT_ID              = "COS_FGCS2_070925010423_0000"
PRODUCT_CREATION_TIME   = 2009-02-26T11:36:37
MISSION_NAME            = "INTERNATIONAL ROSETTA MISSION"
MISSION_PHASE_NAME     = "EARTH SWING-BY 2"
MISSION_ID              = ROSETTA
INSTRUMENT_HOST_NAME    = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID     = RL
PRODUCT_TYPE            = EDR
START_TIME              = 2007-09-25T01:04:23.810
STOP_TIME               = 2007-09-25T01:04:23.810
SPACECRAFT_CLOCK_START_COUNT = "2/149303031.21"
SPACECRAFT_CLOCK_STOP_COUNT  = "2/149303031.21"

PRODUCER_ID             = "SONC"
PRODUCER_FULL_NAME      = "SCIENCE OPERATIONS AND NAVIGATION CENTER"
PRODUCER_INSTITUTION_NAME = "CNES"

INSTRUMENT_ID          = COSAC
INSTRUMENT_NAME        = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE        = {"GAS CHROMATOGRAPH", "MASS SPECTROMETER"}
INSTRUMENT_MODE_ID     = "N/A"
INSTRUMENT_MODE_DESC   = "N/A"
  
```

```
TARGET_NAME           = "EARTH"
TARGET_TYPE           = "PLANET"

PROCESSING_LEVEL_ID   = 2

DATA_QUALITY_ID       = -1
DATA_QUALITY_DESC     = "-1 : NOT QUALIFIED"

/* GEOMETRY PARAMETERS */

/* SPACECRAFT LOCATION: Position <km> */
SC_SUN_POSITION_VECTOR = ( -185273030.9, -34417331.1, -10516343.2)
/* TARGET PARAMETERS: Position <km>, Velocity <km/s> */
SC_TARGET_POSITION_VECTOR = ( -35270974.5, -30840383.3, -8966204.1)
SC_TARGET_VELOCITY_VECTOR = ( 11.7, 7.2, 2.3)
/* SPACECRAFT POSITION WITH RESPECT TO CENTRAL BODY */
SPACECRAFT_ALTITUDE = 47696491.5 <km>
SUB_SPACECRAFT_LATITUDE = 10.80 <deg>
SUB_SPACECRAFT_LONGITUDE = 22.42 <deg>
NOTE = "The values of the keywords SC_SUN_POSITION_VECTOR,
        SC_TARGET_POSITION_VECTOR and SC_TARGET_VELOCITY_VECTOR
        are related to the EMEJ2000 reference frame.
        The values of SUB_SPACECRAFT_LATITUDE and SUB_SPACECRAFT_LONGITUDE
        are northern latitude and eastern longitude in the standard
        planetocentric IAU <TARGET_NAME> frame.
        All values are computed for the time = START_TIME.
        Distances are given in <km> velocities in <km/s>, Angles in <deg>"

/* SD2 PARAMETERS */

ROSETTA:SD2_OVEN_FILLING = "N/A"
ROSETTA:SD2_DRILL_DEPTH = 999.99
ROSETTA:SD2_OVEN_NUMBER = 99
ROSETTA:SD2_OVEN_TYPE = "N/A"
ROSETTA:SAMPLE_NUMBER = 99
ROSETTA:SAMPLE_TAPPING = "N/A"
ROSETTA:SAMPLE_VOLUME = 999.99

/* DATA OBJECT DEFINITION */

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 659
^COSAC_CONFIG_TABLE = ("COS_FGCS2_070925010423_CONF.TAB")
OBJECT = COSAC_CONFIG_TABLE
NAME = CONFIG
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_CONFIG.FMT"
COLUMNS = 82
ROW_BYTES = 659
END_OBJECT = COSAC_CONFIG_TABLE

END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 790
^COSAC_FULL_HK_TABLE = ("COS_FGCS2_070925010423_HKID.TAB")
```

```

OBJECT          = COSAC_FULL_HK_TABLE
  NAME          = FULL_HK_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS          = 1

  ^STRUCTURE    = "COSAC_FULL_HK_SC.FMT"
  COLUMNS      = 92
  ROW_BYTES     = 790
END_OBJECT     = COSAC_FULL_HK_TABLE
END_OBJECT     = FILE

OBJECT          = FILE
  RECORD_TYPE   = FIXED_LENGTH
  FILE_RECORDS  = 45
  RECORD_BYTES  = 152
  ^COSAC_ADC_GC_TABLE = ("COS_FGCS2_070925010423_ADGC.TAB")
OBJECT         = COSAC_ADC_GC_TABLE
  NAME         = ADC_MS
  INTERCHANGE_FORMAT = ASCII
  ROWS         = 45
  ^STRUCTURE   = "COSAC_ADC_GC.FMT"
  COLUMNS     = 17
  ROW_BYTES    = 152
END_OBJECT    = COSAC_ADC_GC_TABLE
END_OBJECT    = FILE

OBJECT          = FILE
  RECORD_TYPE   = FIXED_LENGTH
  FILE_RECORDS  = 2048
  RECORD_BYTES  = 98
  ^COSAC_GC_SPECTRUM_2_TABLE = ("COS_FGCS2_070925010423_GCID.TAB")
OBJECT         = COSAC_GC_SPECTRUM_2_TABLE
  NAME         = MS_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS         = 2048
  ^STRUCTURE   = "COSAC_GC_SPECTRUM_2.FMT"
  COLUMNS     = 8
  ROW_BYTES    = 98
END_OBJECT    = COSAC_GC_SPECTRUM_2_TABLE
END_OBJECT    = FILE

END

```

7 Appendix C : Example of PDS combined detached label for COSAC GC level 2 data product (version 1.8)

```

PDS_VERSION_ID          = PDS3
LABEL_REVISION_NOTE     = "2007-07-16, SONC, version 1.0"
/* PVV version 3.6 */

/*          GC measurements (Level 2)          */

DATA_SET_ID             = "RL-E-COSAC-2-EAR3-V1.0"
DATA_SET_NAME           = "ROSETTA-LANDER EARTH COSAC 2 EAR3 V1.0"
PRODUCT_ID              = "COS_FGCS2_090924215345_0000"
PRODUCT_CREATION_TIME   = 2010-06-24T08:42:58
MISSION_NAME            = "INTERNATIONAL ROSETTA MISSION"

```

```
MISSION_PHASE_NAME = "EARTH SWING-BY 3"
MISSION_ID         = ROSETTA
INSTRUMENT_HOST_NAME = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID = RL
OBSERVATION_TYPE   = "ACTIVE CHECKOUT 10"

PRODUCT_TYPE       = EDR
START_TIME         = 2009-09-24T21:53:45.875
STOP_TIME          = 2009-09-24T21:53:45.875
SPACECRAFT_CLOCK_START_COUNT = "2/212484111.27"
SPACECRAFT_CLOCK_STOP_COUNT  = "2/212484111.27"

PRODUCER_ID        = "SONC"
PRODUCER_FULL_NAME = "SCIENCE OPERATIONS AND NAVIGATION CENTER"
PRODUCER_INSTITUTION_NAME = "CNES"

INSTRUMENT_ID      = COSAC
INSTRUMENT_NAME    = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE    = {"GAS CHROMATOGRAPH", "MASS SPECTROMETER"}
INSTRUMENT_MODE_ID = "N/A"
INSTRUMENT_MODE_DESC = "N/A"
TARGET_NAME        = "EARTH"
TARGET_TYPE        = "PLANET"

PROCESSING_LEVEL_ID = 2
DATA_QUALITY_ID     = -1
DATA_QUALITY_DESC   = "-1 : NOT QUALIFIED"

/* GEOMETRY PARAMETERS */

/* SPACECRAFT LOCATION: Position <km> */
SC_SUN_POSITION_VECTOR = ( -188684364.5, -27008602.8, 7896408.2)
/* TARGET PARAMETERS: Position <km>, Velocity <km/s> */
SC_TARGET_POSITION_VECTOR = ( -38720764.9, -22584033.1, 9812970.1)
SC_TARGET_VELOCITY_VECTOR = ( 12.3, 5.6, -1.5)
/* SPACECRAFT POSITION WITH RESPECT TO CENTRAL BODY */
SPACECRAFT_ALTITUDE = 45880773.1 <km>
SUB_SPACECRAFT_LATITUDE = -12.22 <deg>
SUB_SPACECRAFT_LONGITUDE = 58.77 <deg>
NOTE = "The values of the keywords SC_SUN_POSITION_VECTOR,
        SC_TARGET_POSITION_VECTOR and SC_TARGET_VELOCITY_VECTOR
        are related to the EMEJ2000 reference frame.
        The values of SUB_SPACECRAFT_LATITUDE and SUB_SPACECRAFT_LONGITUDE
        are northern latitude and eastern longitude in the standard
        planetocentric IAU <TARGET_NAME> frame.
        All values are computed for the time = START_TIME.
        Distances are given in <km> velocities in <km/s>, Angles in <deg>"

/* SD2 PARAMETERS */
ROSETTA:SD2_OVEN_FILLING = "N/A"
ROSETTA:SD2_DRILL_DEPTH = 999.99
ROSETTA:SD2_OVEN_NUMBER = 99
ROSETTA:SD2_OVEN_TYPE = "N/A"
ROSETTA:SAMPLE_NUMBER = 99
ROSETTA:SAMPLE_TAPPING = "N/A"
ROSETTA:SAMPLE_VOLUME = 999.99
ROSETTA:INSTRUMENT_ENDUSER = "N/A"

/* DATA OBJECT DEFINITION */

OBJECT = FILE
```



```
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 688
^COSAC_CONFIG_TABLE = ("COS_FGCS2_090924215345_CONF.TAB")
OBJECT = COSAC_CONFIG_TABLE
  NAME = CONFIG
  INTERCHANGE_FORMAT = ASCII
  ROWS = 1
  ^STRUCTURE = "COSAC_CONFIG_FM1_8.FMT"
  COLUMNS = 84
  ROW_BYTES = 688
END_OBJECT = COSAC_CONFIG_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 790
^COSAC_FULL_HK_TABLE = ("COS_FGCS2_090924215345_HKID.TAB")
OBJECT = COSAC_FULL_HK_TABLE
  NAME = FULL_HK_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS = 1
  ^STRUCTURE = "COSAC_FULL_HK_SC.FMT"
  COLUMNS = 92
  ROW_BYTES = 790
END_OBJECT = COSAC_FULL_HK_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 1058
^COSAC_HK_BURST_TABLE = ("COS_FGCS2_090924215345_HBID.TAB")
OBJECT = COSAC_HK_BURST_TABLE
  NAME = HK_BURST_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS = 1
  ^STRUCTURE = "COSAC_HK_BURST.FMT"
  COLUMNS = 123
  ROW_BYTES = 1058
END_OBJECT = COSAC_HK_BURST_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 4096
RECORD_BYTES = 162
^COSAC_GC_SPECTRUM_2_TABLE = ("COS_FGCS2_090924215345_GCID.TAB")
OBJECT = COSAC_GC_SPECTRUM_2_TABLE
  NAME = GC_ID
  INTERCHANGE_FORMAT = ASCII
  ROWS = 4096
  ^STRUCTURE = "COSAC_GC_SPECTRUM_2_FM1_8.FMT"
  COLUMNS = 12
  ROW_BYTES = 162
END_OBJECT = COSAC_GC_SPECTRUM_2_TABLE
END_OBJECT = FILE
```

END

8 Appendix D : Example of PDS combined detached label for COSAC MS level 2 data product (version previous to 1.8)

```

PDS_VERSION_ID          = PDS3
LABEL_REVISION_NOTE    = "2007-07-16, SONC, version 1.0"
/* PVV version 3.0 */

/*          MS measurements (Level 2)          */

DATA_SET_ID            = "RL-E-COSAC-2-EAR2-V1.0"
DATA_SET_NAME          = "ROSETTA-LANDER EARTH COSAC 2 EAR2 V1.0"
PRODUCT_ID            = "COS_FMSS2_070924190112_0000"
PRODUCT_CREATION_TIME = 2009-02-26T11:36:39
MISSION_NAME           = "INTERNATIONAL ROSETTA MISSION"
MISSION_PHASE_NAME     = "EARTH SWING-BY 2"
MISSION_ID             = ROSETTA
INSTRUMENT_HOST_NAME  = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID    = RL
PRODUCT_TYPE           = EDR
START_TIME             = 2007-09-24T19:01:12.650
STOP_TIME              = 2007-09-24T19:01:12.650
SPACECRAFT_CLOCK_START_COUNT = "2/149281240.16"
SPACECRAFT_CLOCK_STOP_COUNT  = "2/149281240.16"

PRODUCER_ID           = "SONC"
PRODUCER_FULL_NAME    = "SCIENCE OPERATIONS AND NAVIGATION CENTER"
PRODUCER_INSTITUTION_NAME = "CNES"

INSTRUMENT_ID        = COSAC
INSTRUMENT_NAME       = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE       = {"GAS CHROMATOGRAPH", "MASS SPECTROMETER"}
INSTRUMENT_MODE_ID    = "N/A"
INSTRUMENT_MODE_DESC = "N/A"

TARGET_NAME          = "EARTH"
TARGET_TYPE          = "PLANET"

PROCESSING_LEVEL_ID  = 2

DATA_QUALITY_ID      = -1
DATA_QUALITY_DESC    = "-1 : NOT QUALIFIED"

/* GEOMETRY PARAMETERS */

/* SPACECRAFT LOCATION: Position <km> */
SC_SUN_POSITION_VECTOR = ( -185554172.6, -33981836.6, -10308699.4)
/* TARGET PARAMETERS: Position <km>, Velocity <km/s> */
SC_TARGET_POSITION_VECTOR = ( -35525962.5, -30997839.4, -9015592.5)
SC_TARGET_VELOCITY_VECTOR = (          11.7,           7.2,           2.3)
/* SPACECRAFT POSITION WITH RESPECT TO CENTRAL BODY */
SPACECRAFT_ALTITUDE = 47996132.6 <km>
SUB_SPACECRAFT_LATITUDE = 10.79 <deg>
SUB_SPACECRAFT_LONGITUDE = 113.40 <deg>
NOTE = "The values of the keywords SC_SUN_POSITION_VECTOR,
SC_TARGET_POSITION_VECTOR and SC_TARGET_VELOCITY_VECTOR
are related to the EMEJ2000 reference frame.
The values of SUB_SPACECRAFT_LATITUDE and SUB_SPACECRAFT_LONGITUDE
are northern latitude and eastern longitude in the standard
planetocentric IAU <TARGET_NAME> frame.
All values are computed for the time = START_TIME."

```

Distances are given in <km> velocities in <km/s>, Angles in <deg>"

/* SD2 PARAMETERS */

ROSETTA:SD2_OVEN_FILLING = "N/A"
ROSETTA:SD2_DRILL_DEPTH = 999.99
ROSETTA:SD2_OVEN_NUMBER = 99
ROSETTA:SD2_OVEN_TYPE = "N/A"
ROSETTA:SAMPLE_NUMBER = 99
ROSETTA:SAMPLE_TAPPING = "N/A"
ROSETTA:SAMPLE_VOLUME = 999.99

/* DATA OBJECT DEFINITION */

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 659
^COSAC_CONFIG_TABLE = ("COS_FMSS2_070924190112_CONF.TAB")
OBJECT = COSAC_CONFIG_TABLE
NAME = CONFIG
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_CONFIG.FMT"
COLUMNS = 82
ROW_BYTES = 659
END_OBJECT = COSAC_CONFIG_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 790
^COSAC_FULL_HK_TABLE = ("COS_FMSS2_070924190112_HKID.TAB")
OBJECT = COSAC_FULL_HK_TABLE
NAME = FULL_HK_ID
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_FULL_HK_SC.FMT"
COLUMNS = 92
ROW_BYTES = 790
END_OBJECT = COSAC_FULL_HK_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 46
RECORD_BYTES = 139
^COSAC_ADC_MS_TABLE = ("COS_FMSS2_070924190112_ADCM.TAB")
OBJECT = COSAC_ADC_MS_TABLE
NAME = ADC_MS
INTERCHANGE_FORMAT = ASCII
ROWS = 46
^STRUCTURE = "COSAC_ADC_MS.FMT"
COLUMNS = 16
ROW_BYTES = 139
END_OBJECT = COSAC_ADC_MS_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH

```

FILE_RECORDS          = 1
RECORD_BYTES         = 15
^COSAC_TIME_ID_TABLE = ("COS_FMSS2_070924190112_TIME.TAB")
OBJECT               = COSAC_TIME_ID_TABLE
  NAME                = TIME_ID
  INTERCHANGE_FORMAT  = ASCII
  ROWS                 = 1
  ^STRUCTURE          = "COSAC_TIME_ID.FMT"
  COLUMNS             = 2
  ROW_BYTES           = 15
END_OBJECT           = COSAC_TIME_ID_TABLE
END_OBJECT           = FILE

OBJECT                = FILE
RECORD_TYPE           = FIXED_LENGTH
FILE_RECORDS         = 16000
RECORD_BYTES         = 66
^COSAC_MS_SPECTRUM_2_TABLE = ("COS_FMSS2_070924190112_MSID.TAB")
OBJECT               = COSAC_MS_SPECTRUM_2_TABLE
  NAME                = MS_ID
  INTERCHANGE_FORMAT  = ASCII
  ROWS                 = 16000
  ^STRUCTURE          = "COSAC_MS_SPECTRUM_2.FMT"
  COLUMNS             = 5
  ROW_BYTES           = 66
END_OBJECT           = COSAC_MS_SPECTRUM_2_TABLE
END_OBJECT           = FILE

END

```

9 Appendix E : Example of PDS combined detached label for COSAC MS level 2 data product (version 1.8)

```

PDS_VERSION_ID          = PDS3
LABEL_REVISION_NOTE    = "2007-07-16, SONC, version 1.0"
/* PVV version 3.6 */

/*          MS measurements (Level 2)          */

DATA_SET_ID             = "RL-E-COSAC-2-EAR3-V1.0"
DATA_SET_NAME           = "ROSETTA-LANDER EARTH COSAC 2 EAR3 V1.0"
PRODUCT_ID              = "COS_FMSS2_090924213816_0000"
PRODUCT_CREATION_TIME   = 2010-06-24T08:43:02
MISSION_NAME            = "INTERNATIONAL ROSETTA MISSION"
MISSION_PHASE_NAME      = "EARTH SWING-BY 3"
MISSION_ID              = ROSETTA
INSTRUMENT_HOST_NAME    = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID      = RL
OBSERVATION_TYPE        = "ACTIVE CHECKOUT 10"

PRODUCT_TYPE            = EDR
START_TIME              = 2009-09-24T21:38:16.750
STOP_TIME               = 2009-09-24T21:38:16.750
SPACECRAFT_CLOCK_START_COUNT = "2/212455093.23"
SPACECRAFT_CLOCK_STOP_COUNT  = "2/212455093.23"

PRODUCER_ID             = "SONC"
PRODUCER_FULL_NAME      = "SCIENCE OPERATIONS AND NAVIGATION CENTER"

```

```
PRODUCER_INSTITUTION_NAME = "CNES"

INSTRUMENT_ID           = COSAC
INSTRUMENT_NAME         = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE         = {"GAS CHROMATOGRAPH", "MASS SPECTROMETER"}
INSTRUMENT_MODE_ID      = "N/A"
INSTRUMENT_MODE_DESC    = "N/A"
TARGET_NAME             = "EARTH"
TARGET_TYPE             = "PLANET"

PROCESSING_LEVEL_ID     = 2
DATA_QUALITY_ID         = -1
DATA_QUALITY_DESC       = "-1 : NOT QUALIFIED"

/* GEOMETRY PARAMETERS */

/* SPACECRAFT LOCATION: Position <km> */
SC_SUN_POSITION_VECTOR = ( -188697170.0, -26988543.3, 7908737.1)
/* TARGET PARAMETERS: Position <km>, Velocity <km/s> */
SC_TARGET_POSITION_VECTOR = ( -38732224.1, -22589262.9, 9814336.7)
SC_TARGET_VELOCITY_VECTOR = ( 12.3, 5.6, -1.5)
/* SPACECRAFT POSITION WITH RESPECT TO CENTRAL BODY */
SPACECRAFT_ALTITUDE = 45893308.9 <km>
SUB_SPACECRAFT_LATITUDE = -12.22 <deg>
SUB_SPACECRAFT_LONGITUDE = 62.65 <deg>
NOTE = "The values of the keywords SC_SUN_POSITION_VECTOR,
SC_TARGET_POSITION_VECTOR and SC_TARGET_VELOCITY_VECTOR
are related to the EMEJ2000 reference frame.
The values of SUB_SPACECRAFT_LATITUDE and SUB_SPACECRAFT_LONGITUDE
are northern latitude and eastern longitude in the standard
planetocentric IAU_<TARGET_NAME> frame.
All values are computed for the time = START_TIME.
Distances are given in <km> velocities in <km/s>, Angles in <deg>"

/* SD2 PARAMETERS */
ROSETTA:SD2_OVEN_FILLING = "N/A"
ROSETTA:SD2_DRILL_DEPTH = 999.99
ROSETTA:SD2_OVEN_NUMBER = 99
ROSETTA:SD2_OVEN_TYPE = "N/A"
ROSETTA:SAMPLE_NUMBER = 99
ROSETTA:SAMPLE_TAPPING = "N/A"
ROSETTA:SAMPLE_VOLUME = 999.99
ROSETTA:INSTRUMENT_ENDUSER = "N/A"

/* DATA OBJECT DEFINITION */

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 688
^COSAC_CONFIG_TABLE = ("COS_FMSS2_090924213816_CONF.TAB")
OBJECT = COSAC_CONFIG_TABLE
NAME = CONFIG
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_CONFIG_FM1_8.FMT"
COLUMNS = 84
ROW_BYTES = 688
END_OBJECT = COSAC_CONFIG_TABLE
END_OBJECT = FILE
```

```

OBJECT                = FILE
  RECORD_TYPE         = FIXED_LENGTH
  FILE_RECORDS        = 1
  RECORD_BYTES        = 790
  ^COSAC_FULL_HK_TABLE = ("COS_FMSS2_090924213816_HKID.TAB")
  OBJECT              = COSAC_FULL_HK_TABLE
    NAME              = FULL_HK_ID
    INTERCHANGE_FORMAT = ASCII
    ROWS               = 1
    ^STRUCTURE         = "COSAC_FULL_HK_SC.FMT"
    COLUMNS           = 92
    ROW_BYTES          = 790
  END_OBJECT          = COSAC_FULL_HK_TABLE
END_OBJECT            = FILE

OBJECT                = FILE
  RECORD_TYPE         = FIXED_LENGTH
  FILE_RECORDS        = 1
  RECORD_BYTES        = 1058
  ^COSAC_HK_BURST_TABLE = ("COS_FMSS2_090924213816_HBID.TAB")
  OBJECT              = COSAC_HK_BURST_TABLE
    NAME              = HK_BURST_ID
    INTERCHANGE_FORMAT = ASCII
    ROWS               = 1
    ^STRUCTURE         = "COSAC_HK_BURST.FMT"
    COLUMNS           = 123
    ROW_BYTES          = 1058
  END_OBJECT          = COSAC_HK_BURST_TABLE
END_OBJECT            = FILE

OBJECT                = FILE
  RECORD_TYPE         = FIXED_LENGTH
  FILE_RECORDS        = 16000
  RECORD_BYTES        = 60
  ^COSAC_MS_SPECTRUM_2_TABLE = ("COS_FMSS2_090924213816_MSID.TAB")
  OBJECT              = COSAC_MS_SPECTRUM_2_TABLE
    NAME              = MS_ID
    INTERCHANGE_FORMAT = ASCII
    ROWS               = 16000
    ^STRUCTURE         = "COSAC_MS_SPECTRUM_2_FM1_8.FMT"
    COLUMNS           = 5
    ROW_BYTES          = 60
  END_OBJECT          = COSAC_MS_SPECTRUM_2_TABLE
END_OBJECT            = FILE

END

```

10 Appendix F : Example of PDS combined detached label for COSAC GC/MS level 2 data product (version previous to 1.8)

```

PDS_VERSION_ID          = PDS3
LABEL_REVISION_NOTE     = "2009-03-10, SONC, version 1.0"
/* PVV version 3.0 */

/*          Combined GC and MS measurements (Level 2)          */

DATA_SET_ID             = "RL-CAL-COSAC-2-CVP-V1.0"
DATA_SET_NAME           = "ROSETTA-LANDER CAL COSAC 2 CVP V1.0"
PRODUCT_ID              = "COS_FGMS2_041006193328_0004"

```

```
PRODUCT_CREATION_TIME = 2009-03-05T11:00:02
MISSION_NAME           = "INTERNATIONAL ROSETTA MISSION"
MISSION_PHASE_NAME    = "COMMISSIONING"
MISSION_ID            = ROSETTA
INSTRUMENT_HOST_NAME  = "ROSETTA-LANDER"
INSTRUMENT_HOST_ID    = RL
PRODUCT_TYPE          = EDR
START_TIME            = 2004-10-06T19:33:28.163
STOP_TIME             = 2004-10-06T19:33:32.163
SPACECRAFT_CLOCK_START_COUNT = " 1/55711983.28"
SPACECRAFT_CLOCK_STOP_COUNT  = " 1/55712245.26"

PRODUCER_ID           = "SONC"
PRODUCER_FULL_NAME    = "SCIENCE OPERATIONS AND NAVIGATION CENTER"
PRODUCER_INSTITUTION_NAME = "CNES"

INSTRUMENT_ID         = COSAC
INSTRUMENT_NAME        = "COMETARY SAMPLING AND COMPOSITION EXPERIMENT"
INSTRUMENT_TYPE        = {"GAS CHROMATOGRAPH","MASS SPECTROMETER"}
INSTRUMENT_MODE_ID     = "N/A"
INSTRUMENT_MODE_DESC   = "N/A"

TARGET_NAME           = "CALIBRATION"
TARGET_TYPE           = "CALIBRATION"

PROCESSING_LEVEL_ID   = 2
DATA_QUALITY_ID       = -1
DATA_QUALITY_DESC     = "-1 : NOT QUALIFIED"

/* GEOMETRY PARAMETERS */

/* SPACECRAFT LOCATION: Position <km> */
SC_SUN_POSITION_VECTOR = ( -125932909.0, -94072726.7, -39737423.9)
/* TARGET PARAMETERS: Position <km>, Velocity <km/s> */
SC_TARGET_POSITION_VECTOR = ("N/A","N/A","N/A")
SC_TARGET_VELOCITY_VECTOR = ("N/A","N/A","N/A")
/* SPACECRAFT POSITION WITH RESPECT TO CENTRAL BODY */
SPACECRAFT_ALTITUDE = 69155898.6 <km>
SUB_SPACECRAFT_LATITUDE = 21.53 <deg>
SUB_SPACECRAFT_LONGITUDE = 159.36 <deg>
NOTE = "The values of the keywords SC_SUN_POSITION_VECTOR,
        SC_TARGET_POSITION_VECTOR and SC_TARGET_VELOCITY_VECTOR
        are related to the EMEJ2000 reference frame.
        The values of SUB_SPACECRAFT_LATITUDE and SUB_SPACECRAFT_LONGITUDE
        are northern latitude and eastern longitude in the standard
        planetocentric IAU <TARGET_NAME> frame.
        All values are computed for the time = START_TIME.
        Distances are given in <km> velocities in <km/s>, Angles in <deg>"

/* SD2 PARAMETERS */

ROSETTA:SD2_OVEN_FILLING = "N/A"
ROSETTA:SD2_DRILL_DEPTH = 999.99
ROSETTA:SD2_OVEN_NUMBER = 99
ROSETTA:SD2_OVEN_TYPE = "N/A"
ROSETTA:SAMPLE_NUMBER = 99
ROSETTA:SAMPLE_TAPPING = "N/A"
ROSETTA:SAMPLE_VOLUME = 999.99

/* DATA OBJECT DEFINITION */
```

```
OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 659
^COSAC_CONFIG_TABLE = ("COS_FGMS2_041006193328_CONF.TAB")
OBJECT = COSAC_CONFIG_TABLE
NAME = CONFIG
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_CONFIG.FMT"
COLUMNS = 82
ROW_BYTES = 659
END_OBJECT = COSAC_CONFIG_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 1
RECORD_BYTES = 790
^COSAC_FULL_HK_TABLE = ("COS_FGMS2_041006193328_HKID.TAB")
OBJECT = COSAC_FULL_HK_TABLE
NAME = FULL_HK_ID
INTERCHANGE_FORMAT = ASCII
ROWS = 1
^STRUCTURE = "COSAC_FULL_HK_SC.FMT"
COLUMNS = 92
ROW_BYTES = 790
END_OBJECT = COSAC_FULL_HK_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 38
RECORD_BYTES = 152
^COSAC_ADC_GC_TABLE = ("COS_FGMS2_041006193328_ADGC.TAB")
OBJECT = COSAC_ADC_GC_TABLE
NAME = ADC_MS
INTERCHANGE_FORMAT = ASCII
ROWS = 38
^STRUCTURE = "COSAC_ADC_GC.FMT"
COLUMNS = 17
ROW_BYTES = 152
END_OBJECT = COSAC_ADC_GC_TABLE
END_OBJECT = FILE

OBJECT = FILE
RECORD_TYPE = FIXED_LENGTH
FILE_RECORDS = 85
RECORD_BYTES = 139
^COSAC_ADC_MS_TABLE = ("COS_FGMS2_041006193328_ADCM.TAB")
OBJECT = COSAC_ADC_MS_TABLE
NAME = ADC_MS
INTERCHANGE_FORMAT = ASCII
ROWS = 85
^STRUCTURE = "COSAC_ADC_MS.FMT"
COLUMNS = 16
ROW_BYTES = 139
END_OBJECT = COSAC_ADC_MS_TABLE
END_OBJECT = FILE

OBJECT = FILE
```



```

|-COS_FGMS2_041006193320_I05.LBL
|-COS_FGMS2_041006193320_I05.PNG
|-COS_FGMS2_041006193320_I06.LBL
|-COS_FGMS2_041006193320_I06.PNG
|-COS_FGMS2_041006193320_I07.LBL
|-COS_FGMS2_041006193320_I07.PNG
|-COS_FGMS2_041006193320_I08.LBL
|-COS_FGMS2_041006193320_I08.PNG
|-COS_FGMS2_041006193320_I09.LBL
|-COS_FGMS2_041006193320_I09.PNG
|-BROWSE-----|-COS_FGMS2_041006193320_I10.LBL
|-COS_FGMS2_041006193320_I10.PNG
|-COS_FGMS2_041006193320_I11.LBL
|-COS_FGMS2_041006193320_I11.PNG
|-COS_FGMS2_041006193320_I12.LBL
|-COS_FGMS2_041006193320_I12.PNG
|-COS_FGMS2_041006193320_I13.LBL
|-COS_FGMS2_041006193320_I13.PNG
|-COS_FGMS2_041006193320_I14.LBL
|-COS_FGMS2_041006193320_I14.PNG
|-COS_FGMS2_041006193320_I15.LBL
|-COS_FGMS2_041006193320_I15.PNG
|-COS_FMSS2_041005234745_I01.LBL
|-COS_FMSS2_041005234745_I01.PNG
|-COS_FMSS2_041005235029_I01.LBL
|-COS_FMSS2_041005235029_I01.LBL
|-COS_FMSS2_041005235419_I01.LBL
|-COS_FMSS2_041005235419_I01.PNG
|-COS_FMSS2_041006190521_I01.LBL
|-COS_FMSS2_041006190521_I01.PNG
    
```

```

|-CATINFO.TXT
|-DATASET.CAT
|-CATALOG-----|-INST.CAT
|-INSTHOST.CAT
|-MISSION.CAT
|-PERSON.CAT
|-REF.CAT
|-SOFTWARE.CAT
    
```

```

|-COS_FGMS2_041006193320_0004.LBL
|-COS_FGMS2_041006193320_ADCM.TAB
|-COS_FGMS2_041006193320_ADGC.TAB
|-COS_FGMS2_041006193320_CONF.TAB
|-COS_FGMS2_041006193320_GCID.TAB
|-COS_FGMS2_041006193320_HKID.TAB
|-COS_FGMS2_041006193320_MSID.TAB
|-COS_FGMS2_041006193320_TIME.TAB
|-COS_FMSS2_041005234745_0000.LBL
|-COS_FMSS2_041005234745_ADCM.TAB
|-COS_FMSS2_041005234745_CONF.TAB
|-COS_FMSS2_041005234745_HKID.TAB
|-COS_FMSS2_041005234745_MSID.TAB
|-COS_FMSS2_041005234745_TIME.TAB
|-COS_FMSS2_041005235029_0000.LBL
|-DATA-----|-COS_FMSS2_041005235029_ADCM.TAB
|-COS_FMSS2_041005235029_CONF.TAB
|-COS_FMSS2_041005235029_HKID.TAB
|-COS_FMSS2_041005235029_MSID.TAB
|-COS_FMSS2_041005235029_TIME.TAB
|-COS_FMSS2_041005235419_0000.LBL
|-COS_FMSS2_041005235419_ADCM.TAB
|-COS_FMSS2_041005235419_CONF.TAB
|-COS_FMSS2_041005235419_HKID.TAB
|-COS_FMSS2_041005235419_MSID.TAB
    
```

```

|                                     | -COS_FMSS2_041005235419_TIME.TAB
|                                     | -COS_FMSS2_041006190521_0000.LBL
|                                     | -COS_FMSS2_041006190521_ADCM.TAB
|                                     | -COS_FMSS2_041006190521_CONF.TAB
|                                     | -COS_FMSS2_041006190521_HKID.TAB
|                                     | -COS_FMSS2_041006190521_MSID.TAB
|                                     | -COS_FMSS2_041006190521_TIME.TAB
|
|                                     | -COSAC.LBL
|                                     | -COSAC.PDF
|                                     | -COSAC_CALIBRATION_DESC.LBL
|                                     | -COSAC_CALIBRATION_DESC.TXT
|                                     | -DOCINFO.TXT
|                                     | -EAICD_COSAC.LBL
|                                     | -EAICD_COSAC.PDF
| -DOCUMENT----- | -RO-LCO-IF-340001.LBL
|                                     | -RO-LCO-IF-340001.PDF
|                                     | -TIMELINE_CVP.TXT
|                                     | -TIMELINE_CVP_DESC.TXT
|                                     | -TIMELINE_CVP_PART1.LBL
|                                     | -TIMELINE_CVP_PART1.PNG
|                                     | -TIMELINE_CVP_PART2.LBL
|                                     | -TIMELINE_CVP_PART2.PNG
|
| -EXTRAS----- | -COSAC_EGSE----- | -EGSE2005.EXE
|                                     | -EXTRINFO.TXT
|
|                                     | -BROWSE_INDEX.LBL
|                                     | -BROWSE_INDEX.TAB
| -INDEX----- | -INDXINFO.TXT
|                                     | -INDEX.LBL
|                                     | -INDEX.TAB
|
|                                     | -COSAC_ADC_GC.FMT
|                                     | -COSAC_ADC_MS.FMT
|                                     | -COSAC_CALIBRATED_HK.FMT
| -LABEL----- | -COSAC_CONFIG.FMT
|                                     | -COSAC_FULL_HK_SC.FMT
|                                     | -COSAC_GC_SPECTRUM_2.FMT
|                                     | -COSAC_MS_SPECTRUM_2.FMT
|                                     | -COSAC_TIME_ID.FMT
|                                     | -LABINFO.TXT
|
| -VOLDESC.CAT

```

12 Appendix H : PDS Glossary

Archive – An archive consists of one or more data sets along with all the documentation and ancillary information needed to understand and use the data. An archive is a logical construct independent of the medium on which it is stored.

Archive Volume, Archive Volume Set – A volume is a unit of media on which data products are stored; for example, one CD-ROM or DVD-ROM. An *archive volume* is a volume containing all or part of an archive; that is, data products plus documentation and ancillary files. When an archive spans multiple volumes, they are called an *archive volume set*. Usually the documentation and some ancillary files are repeated on each volume of the set, so that a single volume can be used alone.

Catalog Information – Descriptive information about a data set (e.g. mission description, spacecraft description, instrument description), expressed in Object Description Language (ODL), which is suitable for loading into a PDS catalog.

Data Product – A labeled grouping of data resulting from a scientific observation, usually stored in one file. A product label identifies, describes, and defines the structure of the data. An example of a data product is a planetary image, a spectrum table, or a time series table.

Data Set – An accumulation of data products. A data set together with supporting documentation and ancillary files is an archive.