Doc No. :PT-HMOC-OPS-FOP-6001-OPS-OAH

Fop Issue : 3.0 Issue Date: 13/04/10

PTC PID Sub K

File: H\_COP\_SPI\_PPDS.xls Author: L.Lucas-hp





### Procedure Summary

#### Objectives

The objective of this procedure is to stipulate which procedures are required for the Photometer thermal control PID Tuning, Sub

### Summary of Constraints

The saved stack files should have been generated prior to the  $% \left( 1\right) =\left( 1\right) \left( 1\right) +\left( 1\right) \left( 1\right)$  $\ensuremath{\mathsf{DTCP}}$  and sent to the  $\ensuremath{\mathsf{HSC/ICC}}$  as defined in the procedure  ${\tt H\_GSP\_MCS\_MSTK.}$ 

6 OBS\_ID values are required from the HSC.

#### Spacecraft Configuration

Start of Procedure

n/a

End of Procedure

n/a

#### Reference File(s)

Input Command Sequences

Output Command Sequences

# Referenced Displays

ANDs GRDs

ZAZ7J999

### Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
21/04/09	2.3	1	Created	L.Lucas-hp	

: Version 1 - Unchanged Status

Page 1 of 6 Last Checkin: 21/04/09

Issue Date: 13/04/10

PTC PID Sub K


File: H\_COP\_SPI\_PPDS.xls

Author: L.Lucas-hp





# Procedure Flowchart Overview

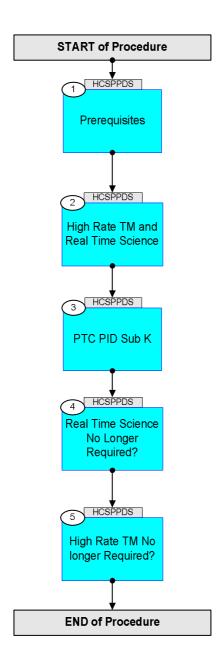

Status : Version 1 - Unchanged

Issue Date: 13/04/10

PTC PID Sub K

File: H\_COP\_SPI\_PPDS.xls Author: L.Lucas-hp





Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		Beginning of Procedure		
		TC Seq. Name :HCSPPDS (PTC PID Sub K)		
		TimeTag Type: Sub Schedule ID:		
	T			Next Step:
1		Prerequisites		2
		The following test consists of one activity. An activity is represented by one saved stack file to be generated prior to the DTCP.		
		Each stack should allso be delivered to the HSC/ICC using the procedure defined in H_GSP_MCS_MSTK		
		NOTE: Naming Convention for saved stack file:		
		yyyymmdd_nnnn_H_SAVED_xxvv		
		<pre>yyyy = Year [of expected uplink] mm = Month [of expected uplink] dd = Day [of expected uplink] nnnn = OD [of expected uplink] xx = TSF number (defined in each activity) vv = version number</pre>		
		Note: The procedures defined below should be brought together into the following saved stack file prior to the DTCP:		
		yyyymmdd_nnnn_H_SAVED_xxvv		
		This file is then called up and executed on the manual stack during the DTCP.		
1.1		Verify HSC/ICC inputs		
		Prerequisites, verify: DPU s/w version/subversion SPU s/w version/subversion		
		FP: OBS_ID (quantity 6)		
2		High Rate TM and Real Time Science		Next Step:
		Note: Both high rate TM and Real Time Science are required for this test.		
2.1		Verify High Rate TM is Available.		

Status : Version 1 - Unchanged

Fop Issue : 3.0 Issue Date: 13/04/10

PTC PID Sub K

File: H\_COP\_SPI\_PPDS.xls
Author: L.Lucas-hp





Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		High Rate TM is required.		
		Verify High Bit Rate		
		TME_BITRATE DEMRF160	= 1.5 Mbps	AND=ZAZ7J999
		If High Rate is not available, consult with SOM.		
		Upon confirmation from SOM, run the following		
		procedure to enable High Rate TM. PROCEDURE:		
		H_FCP_TTC_TUHR [HFTTUHR]		
2.2		Wanife Dark Wine Orients in Assilable		
2.2		Verify Real Time Science is Available.		
		Real Time Science data is required. Check the NCTRS for VC1.		
		101 vol.		
		If VC1 is not available, consult with SOM.		
		Upon confirmation from SOM, run the following		
		procedure to enable RTS.		
		PROCEDURE:		
		H_FCP_DHS_1013A [HFD1013A]		
				Next Step:
3		PTC PID Sub K		4
		Note:		
		The procedures defined below should be brought together into the following saved stack file prior to		
		the DTCP:		
		yyyymmdd_nnnn_H_SAVED_xxvv		
		This file is then selled up and everyted on the manual		
		This file is then called up and executed on the manual stack during the DTCP.		
		bodon during one brore		
-				
3.1		Activity procedures		
		Run the following six, 6 procedures.		
3.1.1		BSM ON		
		PROCEDURE: H_COP_SPI_MBSN [HCSMBSN]		
		T_COT_PET_MENT [ TCOMENT]		
		FP:		
		OBS_ID		
3.1.2		BSM INIT		
•	•			

Status : Version 1 - Unchanged

Issue Date: 13/04/10

PTC PID Sub K

File: H\_COP\_SPI\_PPDS.xls Author: L.Lucas-hp





Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		PROCEDURE: H_COP_SPI_MBSI [HCSMBSI]		
		FP:		
		OBS_ID		
3.1.3		Photometer Detector ON		
		PROCEDURE: H_COP_SPI_MPHN [HCSMPHN]		
		FP:		
		OBS_ID		
3.1.4		PTC PID Sub K		
		PROCEDURE: H_COP_SPI_PTCT [HCSPTCT]		
		FP:		
		OBS_ID		
3.1.5		Photmoeter Detectors OFF		
		PROCEDURE: H_COP_SPI_MPHF [HCSMPHF]		
		Fp:		
		OBS_ID		
3.1.6		BSM OFF		
***************************************		PROCEDURE:		
		H_COP_SPI_MBSF [HCSMBSF]		
		FP: OBS_ID		
4				Next Step:
4		Real Time Science No Longer Required?		5
		Real Time Science data is no longer required for this test for SPIRE.		
4.5				
4.1		Verify Real Time Science is Still Required		
		Verify if RTS is still required (generally).		
		Consult with SOM.		
		If it is still required, do nothing.		

Status : Version 1 - Unchanged

Issue Date: 3.0

PTC PID Sub K

File: H\_COP\_SPI\_PPDS.xls
Author: L.Lucas-hp





Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
	11110	If REal Time Science is not still required.	10/1111	Dispidy, Didner
		Upon confirmation from SOM, if RTS is no longer required generally and should be disabled, run the following procedure to disable RTS.		
		PROCEDURE: H_FCP_DHS_1013B [HFD1013B]		
				Next Step:
5		High Rate TM No longer Required?		END
5.1		Verify High Rate TM is Still Required.		
		Verify if High Rate TM is still required (generally).		
		Consult with SOM.		
		If it is still required, do nothing.		
		If High Rate is not still required.		
		Upon confirmation from SOM, run the following procedure to changefrom High Rate to medium rate TM.		
		PROCEDURE: H_FCP_TTC_TUMR [HFTTUMR]		
			1	·
		End of Procedure		

Status : Version 1 - Unchanged