

S/C self transition to Nominal
 File: H_CRP_DHS_3066.xls
 Author: cmevi-hp



Procedure Summary

Objectives

This procedure describes the steps needed to perform the S/C self transition to Nominal mode.

Summary of Constraints

The S/C mode is changed through ASW TCs(8,4,110,1/2) thus the status of the ASW function "Mode Management" has to be "running".

Spacecraft Configuration

Start of Procedure

n/a

End of Procedure

n/a

Reference File(s)

Input Command Sequences

Output Command Sequences

HRD3066

Referenced Displays

ANDs **GRDs** **SLDs**
 ZAZAI999


Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
12/11/08	2	1	Created	cmevi-hp	

S/C self transition to Nominal
File: H_CRP_DHS_3066.xls
Author: cmevi-hp



Procedure Flowchart Overview

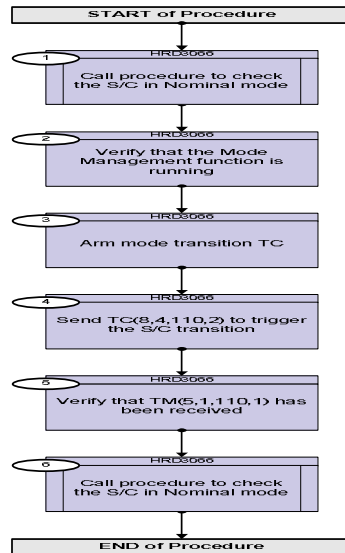

S/C self transition to Nominal
 File: H_CRP_DHS_3066.xls
 Author: cmevi-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
Beginning of Procedure				
TC Seq. Name :HRD3066 (S/C self tra to NOM)				
TimeTag Type: Sub Schedule ID: □				
1		Call procedure to check the S/C in Nominal mode		Next Step: 2
		Execute procedure H_FCP_DHS_4003.		
2		Verify that the Mode Management function is running		Next Step: 3
		Verify Telemetry ModeSts DEH21170	= Running	AND=ZAZAI999
3		Arm mode transition TC		Next Step: 4
		Execute Telecommand ModeManArmTrans_Nom TC Control Flags : GBM IL DSE --Y -- -- Subsch. ID : 10 Det. descr. : Mode Manag. Arm Transition to Nominal Mode TC(8,4,110,1)	DC03G170	
4		Send TC(8,4,110,2) to trigger the S/C transition		Next Step: 5
		Execute Telecommand ModeManFireTrans_Nom TC Control Flags : GBM IL DSE --Y -- -- Subsch. ID : 10 Det. descr. : Mode Manag. Fire Transition to Nominal Mode TC(8,4,110,2)	DC08G170	
5		Verify that TM(5,1,110,1) has been received		Next Step: 6
		WARNING: downlink of TM(5,1) is disable by default, thus the following packet can be acquired only if it previously enabled.		
		This event will be sent when the new S/C mode has been reached.		

S/C self transition to Nominal
 File: H_CRP_DHS_3066.xls
 Author: cmevi-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		Verify Packet Reception CdmuAsw Event 5-1 New Mode Reached Packet Details: APID: 16 Type: 5 Subtype: 1 PI1: 28161 PI2: 0	D_EvRp_080	
		Verify Packet Telemetry (Pkt = D_EvRp_080) TM5xEventID DEZSJ170	= NewModeReached	(None)
		Verify Packet Telemetry (Pkt = D_EvRp_080) SID DE010170	= 0 <dec>	(None)
		Verify Packet Telemetry (Pkt = D_EvRp_080) ModeId DE142170	= Nominal	(None)
		Verify Packet Telemetry (Pkt = D_EvRp_080) EventSeqCounter DE069170		(None)
6		<i>Call procedure to check the S/C in Nominal mode</i>		Next Step: END
		Execute procedure H_FCP_DHS_4003.		
End of Procedure				