

Tx2 and TM encoder in use configuration for LR1
File: H_CRP_TTC_T2L1.xls
Author: E. Picallo



Procedure Summary

Objectives

This procedure describes the steps needed to change the TM bit rate to 500 bps when the downlink and the uplink are already established.

This procedure does not use the logical addressing, thus must be executed under Ground control (the commands used cannot be inserted in the MTL).

Summary of Constraints

XPND2 and the TM encoder are configured using TC(8,4,115,9), TC(8,4,115,18) and TC(8,4,115,20), thus the status of the ASW function "TTC Management" has to be "running".

Note that:

- the value of the TM modulation index is always 1.2;
- the value of the RNG modulation index, when CM and RNG are ON, is always 0.6;
- the value of the Output power level is always - 4dBm;
- the External reference and Internal bit pattern generator are always OFF.

If the ASW function "On board Scheduling" is stopped the TCs can not be added into the MTL.
If the function is running, up to four time-tagged TCs are released per second.

It is recommended to command ON the coherent and ranging mode parameters by Ground only after confirmation of onboard lock.

Spacecraft Configuration

Start of Procedure

CDMU in default configuration;
Downlink active via TX2 and TWTA2;
TM bit rate set to any value;
XPND configuration: CM OFF or CM ON and RNG OFF or CM ON and RNG ON.

End of Procedure

CDMU in default configuration;
Downlink active via TX2 and TWTA2;
TM bit rate equal to 500 bps;
XPND configuration: CM and RNG unchanged.

Reference File(s)

Input Command Sequences

Output Command Sequences

HRRT2L11
HRRT2L12

Referenced Displays

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



ANDs GRDs SLDs
 ZAZ7I999
 ZAZ7J999


Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
29/07/08		1	Created	E. Picallo	
29/07/08	1	1.01	Validation : sequence name correction	E. Picallo	
16/12/08	2	2	TC DCT18170 Configure Xpnd mask update TCs XPND Config & TM ENC Config blocked TC XPND Config do not update CM and RM	E. Picallo	
14/03/09	2.2	2.01	Validation : Verification RNG mod status corrected	E. Picallo	

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Procedure Flowchart Overview

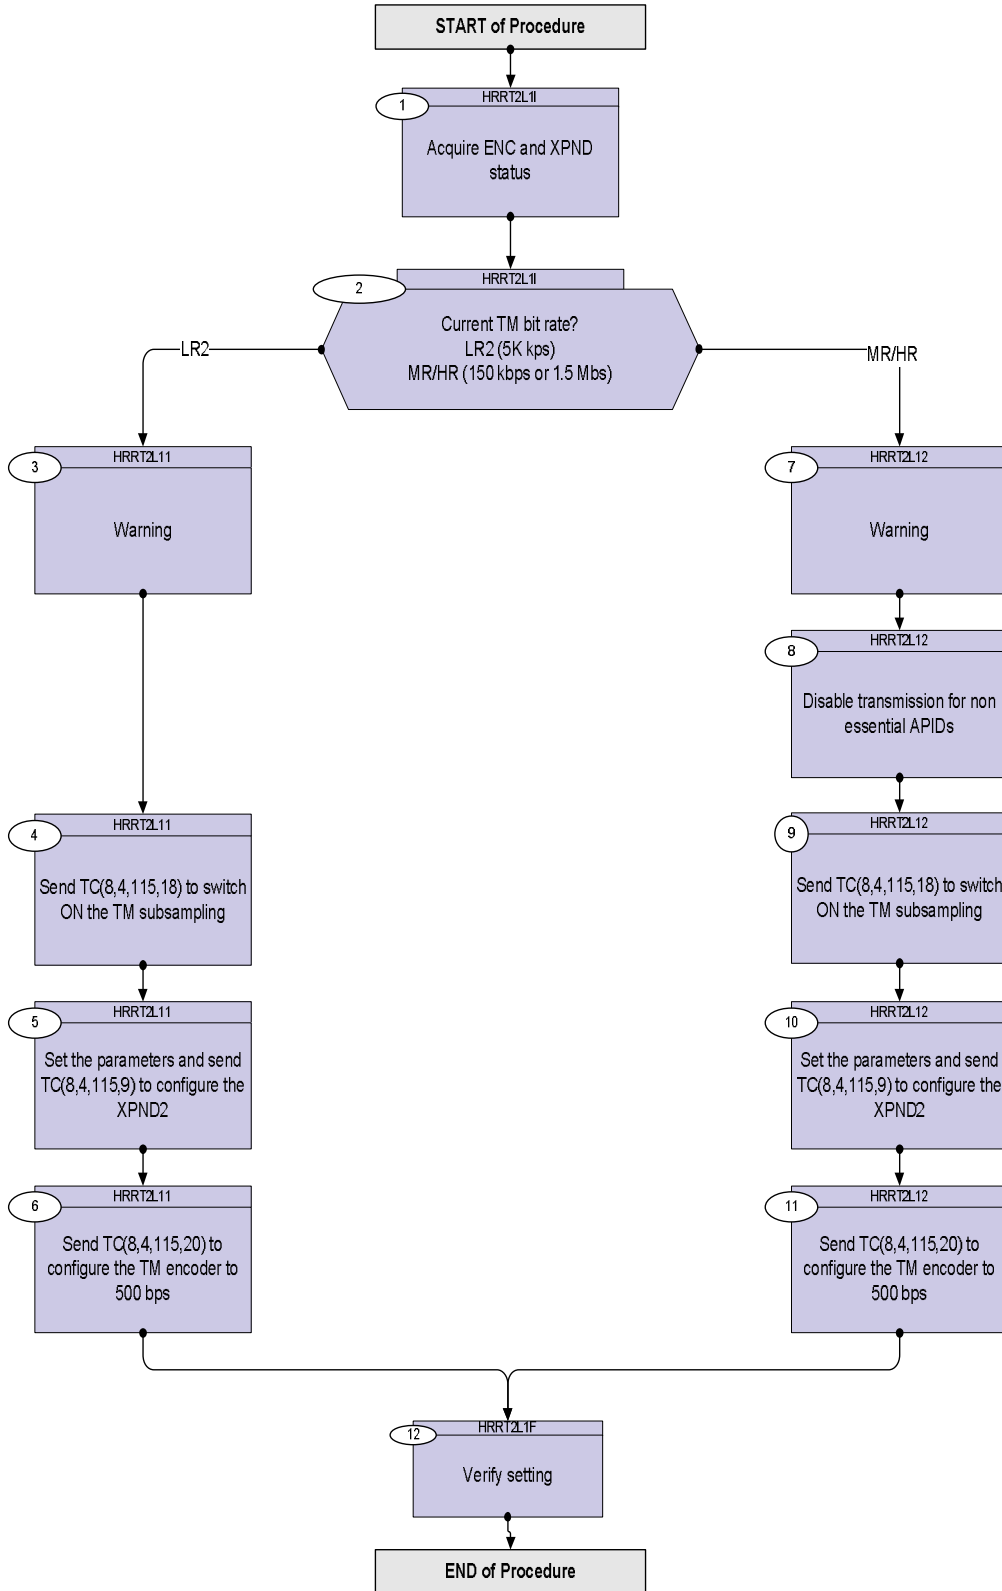

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
Beginning of Procedure				
TC Seq. Name :HRRT2L1I (Tx2 for LR1 initial) Tx2 and TM encoder in use configuration for LR1 TimeTag Type: N Sub Schedule ID: <input type="checkbox"/>				
1		Acquire ENC and XPND status		Next Step: 2
		Verify RX2 AGC Level Telemetry X2 AGC TMUpInk RMB41442	>= -141.0 dbmW	AND=ZAZ7I999
		Verify RX2 Lock status Telemetry X2 Rx Lock - RL RMB45442	= Locked	AND=ZAZ7I999
		Verify Low Rate-1 status Telemetry X2 LowRate-1 MD RMB51442	= OFF	AND=ZAZ7I999
		Verify Low Rate-2 status Telemetry X2 LowRate-2 MD RMB52442		AND=ZAZ7I999
		Verify Medium Rate Modulator status Telemetry X2 MedRate-MRM RMB50442		AND=ZAZ7I999
		Verify High Rate Modulator status Telemetry X2 HIRateMD-HRM RMB49442		AND=ZAZ7I999
		Verify Coherent Mode status Telemetry X2 Coher MOD-CM RMB47442		AND=ZAZ7I999
		Verify Ranging Modulator status Telemetry X2 Rang MD - RM RMB48442		AND=ZAZ7I999
		Verify Telemetry TME_BITRATE DEMRF160		AND=ZAZ7J999
2		Current TM bit rate? LR2 (5K kps) MR/HR (150 kbps or 1.5 Mbs)		Next Step: MR/HR 7 LR2 3
TC Seq. Name :HRRT2L11 (Tx2 from LR2 to LR1) Tx2 and TM encoder in use configuration from LR2 to LR1 TimeTag Type: N Sub Schedule ID: <input type="checkbox"/>				
3		Warning		Next Step: 4

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch																																	
		<p>The current TM bit rate is not LR1. Therefore a TM bit rate switch will be performed.</p> <p>A specific feature of this switching, is that it shall be done by several TC. Specifically, separate TC will be necessary to set-up the TM encoder, and the XPND.</p> <p>In the time interval between those TC, the TM flux will be some TM disruption, and no CLCW will be available to acknowledge the TC. Therefore send those TCs blocked (encoded in a single CLTU) or send TCs TT.</p>																																			
4		Send TC(8,4,115,18) to switch ON the TM subsampling		Next Step: 5																																	
		Execute Telecommand <p style="text-align: center;">TtcSwitchTmSubsamplOn</p> TC Control Flags : <p style="text-align: right;">GBM IL DSE --Y -- --</p> Subsch. ID : 10 Det. descr. : TTC: Switch TM Subsampling On TC(8,4,115,18)	DC04F170																																		
5		Set the parameters and send TC(8,4,115,9) to configure the XPND2		Next Step: 6																																	
		Execute Telecommand <p style="text-align: center;">XpndConfigure_Templ</p> Command Parameter(s) : <table style="width: 100%; border: none;"> <tr> <td style="width: 30%;">XpndId</td> <td style="width: 30%;">DH018170</td> <td style="width: 30%;">XpndB</td> </tr> <tr> <td>XpndConfMask1Unus</td> <td>DH220170</td> <td>11 <bin></td> </tr> <tr> <td>XpndConfMask1_ER</td> <td>DH221170</td> <td>ON</td> </tr> <tr> <td>XpndConfMask1_CM</td> <td>DH222170</td> <td>OFF (Def)</td> </tr> <tr> <td>XpndConfMask1_RM</td> <td>DH223170</td> <td>OFF (Def)</td> </tr> <tr> <td>XpndConfMask1_HRM</td> <td>DH224170</td> <td>ON</td> </tr> <tr> <td>XpndConfMask1_MRM</td> <td>DH225170</td> <td>ON</td> </tr> <tr> <td>XpndConfMask1LRM1</td> <td>DH226170</td> <td>ON</td> </tr> <tr> <td>XpndConfMask1LRM2</td> <td>DH227170</td> <td>ON</td> </tr> <tr> <td>XpndConfMask1_RMI</td> <td>DH228170</td> <td>Update</td> </tr> <tr> <td>XpndConfMask1_TMI</td> <td>DH229170</td> <td>Update</td> </tr> </table>	XpndId	DH018170	XpndB	XpndConfMask1Unus	DH220170	11 <bin>	XpndConfMask1_ER	DH221170	ON	XpndConfMask1_CM	DH222170	OFF (Def)	XpndConfMask1_RM	DH223170	OFF (Def)	XpndConfMask1_HRM	DH224170	ON	XpndConfMask1_MRM	DH225170	ON	XpndConfMask1LRM1	DH226170	ON	XpndConfMask1LRM2	DH227170	ON	XpndConfMask1_RMI	DH228170	Update	XpndConfMask1_TMI	DH229170	Update	DCT18170	
XpndId	DH018170	XpndB																																			
XpndConfMask1Unus	DH220170	11 <bin>																																			
XpndConfMask1_ER	DH221170	ON																																			
XpndConfMask1_CM	DH222170	OFF (Def)																																			
XpndConfMask1_RM	DH223170	OFF (Def)																																			
XpndConfMask1_HRM	DH224170	ON																																			
XpndConfMask1_MRM	DH225170	ON																																			
XpndConfMask1LRM1	DH226170	ON																																			
XpndConfMask1LRM2	DH227170	ON																																			
XpndConfMask1_RMI	DH228170	Update																																			
XpndConfMask1_TMI	DH229170	Update																																			

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		XpndConfMask2_PG DH230170 XpndConfMask2Unus DH231170 XpndConfMask2OPLS DH232170 XpndConfDW1Unus DH020170 XpndConfDW1_ER DH021170 XpndConfDW1_CM DH022170 XpndConfDW1_RM DH023170 XpndConfDW1_HRM DH024170 XpndConfDW1_MRM DH025170 XpndConfDW1LRM1 DH026170 XpndConfDW1LRM2 DH027170 XpndConfDW1_RMI DH028170 XpndConfDW1_TMI DH029170 XpndConfDW2_PG DH030170 XpndConfDW2Unus DH031170 XpndConfDW2OPLS DH032170 TC Control Flags : GBM IL DSE -SY -- --- Subsch. ID : 10 Det. descr. : TEMPLATE Configure Xpnd TC(8,4,115,9)	ON 111111111111 <bin> Update 0 <dec> (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) ON OFF (Def) 0.6 1.2 OFF (Def) 0 <dec> (Def)	
		Notice that in the configuration of the XPND the coherent mode is unchanged. Although if the receiver losses lock for more than 0.2 s, then the transponder reverts back to noncoherent mode. When receiver locks again, the transponder automatically returns to the memorised mode.		
6		Send TC(8,4,115,20) to configure the TM encoder to 500 bps Execute Telecommand TtcConfigTmEncInUseLow1 TC Control Flags : GBM IL DSE -E- -- --- Subsch. ID : 10 Det. descr. : TTC: Config TM Enc In Use Mode Low 1,500 bps, TC(8,4,115,20)	DC12F170	Next Step: 12
TC Seq. Name :HRRT2L12 (Tx2 from MR to LR1) Tx2 and TM encoder in use configuration from MR to LR1 TimeTag Type: N Sub Schedule ID: □				
7		Warning		Next Step: 8

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch																																												
		<p>The current TM bit rate is not LR1. Therefore a TM bit rate switch will be performed.</p> <p>A specific feature of this switching, is that it shall be done by several TC. Specifically, separate TC will be necessary to set-up the TM encoder, and the XPND.</p> <p>In the time interval between those TC, the TM flux will be some TM disruption, and no CLCW will be available to acknowledge the TC. Therefore send those TCs blocked (encoded in a single CLTU) or send TCs TT.</p>																																														
8		Disable transmission for non essential APIDs		Next Step: 9																																												
		Execute Procedure: H_CRP_DHS_1001 Disabling transmission for non essential APIDs.																																														
9		Send TC(8,4,115,18) to switch ON the TM subsampling		Next Step: 10																																												
		Execute Telecommand <p style="text-align: right;">TtcSwitchTmSubsamplOn</p> <p>TC Control Flags :</p> <p style="text-align: right;">GBM IL DSE --Y -- --</p> <p>Subsch. ID : 10 Det. descr. : TTC: Switch TM Subsampling On TC(8,4,115,18)</p>	DC04F170																																													
10		Set the parameters and send TC(8,4,115,9) to configure the XPND2		Next Step: 11																																												
		Execute Telecommand <p style="text-align: right;">XpndConfigure_Templ</p> <p>Command Parameter(s) :</p> <table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;"></td> <td style="width: 30%; text-align: right;">XpndId</td> <td style="width: 20%; text-align: right;">DH018170</td> <td style="width: 20%; text-align: right;">XpndB</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1Unus</td> <td style="text-align: right;">DH220170</td> <td style="text-align: right;">11 <bin></td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_ER</td> <td style="text-align: right;">DH221170</td> <td style="text-align: right;">ON</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_CM</td> <td style="text-align: right;">DH222170</td> <td style="text-align: right;">OFF (Def)</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_RM</td> <td style="text-align: right;">DH223170</td> <td style="text-align: right;">OFF (Def)</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_HRM</td> <td style="text-align: right;">DH224170</td> <td style="text-align: right;">ON</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_MRM</td> <td style="text-align: right;">DH225170</td> <td style="text-align: right;">ON</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1LRM1</td> <td style="text-align: right;">DH226170</td> <td style="text-align: right;">ON</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1LRM2</td> <td style="text-align: right;">DH227170</td> <td style="text-align: right;">ON</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_RMI</td> <td style="text-align: right;">DH228170</td> <td style="text-align: right;">Update</td> </tr> <tr> <td></td> <td style="text-align: right;">XpndConfMask1_TMI</td> <td style="text-align: right;">DH229170</td> <td style="text-align: right;">Update</td> </tr> </table>		XpndId	DH018170	XpndB		XpndConfMask1Unus	DH220170	11 <bin>		XpndConfMask1_ER	DH221170	ON		XpndConfMask1_CM	DH222170	OFF (Def)		XpndConfMask1_RM	DH223170	OFF (Def)		XpndConfMask1_HRM	DH224170	ON		XpndConfMask1_MRM	DH225170	ON		XpndConfMask1LRM1	DH226170	ON		XpndConfMask1LRM2	DH227170	ON		XpndConfMask1_RMI	DH228170	Update		XpndConfMask1_TMI	DH229170	Update	DCT18170	
	XpndId	DH018170	XpndB																																													
	XpndConfMask1Unus	DH220170	11 <bin>																																													
	XpndConfMask1_ER	DH221170	ON																																													
	XpndConfMask1_CM	DH222170	OFF (Def)																																													
	XpndConfMask1_RM	DH223170	OFF (Def)																																													
	XpndConfMask1_HRM	DH224170	ON																																													
	XpndConfMask1_MRM	DH225170	ON																																													
	XpndConfMask1LRM1	DH226170	ON																																													
	XpndConfMask1LRM2	DH227170	ON																																													
	XpndConfMask1_RMI	DH228170	Update																																													
	XpndConfMask1_TMI	DH229170	Update																																													

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		XpndConfMask2_PG DH230170 XpndConfMask2Unus DH231170 XpndConfMask2OPLS DH232170 XpndConfDW1Unus DH020170 XpndConfDW1_ER DH021170 XpndConfDW1_CM DH022170 XpndConfDW1_RM DH023170 XpndConfDW1_HRM DH024170 XpndConfDW1_MRM DH025170 XpndConfDW1LRM1 DH026170 XpndConfDW1LRM2 DH027170 XpndConfDW1_RMI DH028170 XpndConfDW1_TMI DH029170 XpndConfDW2_PG DH030170 XpndConfDW2Unus DH031170	ON 1111111111 <bin> Update 0 <dec> (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) OFF (Def) ON OFF (Def) 0.6 1.2 OFF (Def) 0 <dec> (Def)	
		XpndConfDW2OPLS DH032170 TC Control Flags : GBM IL DSE -SY -- --- Subsch. ID : 10 Det. descr. : TEMPLATE Configure Xpnd TC(8,4,115,9)	-4	
		Notice that in the configuration of the XPND the coherent mode is unchanged. Although if the receiver losses lock for more than 0.2 s, then the transponder reverts back to noncoherent mode. When receiver locks again, the transponder automatically returns to the memorised mode.		
11		Send TC(8,4,115,20) to configure the TM encoder to 500 bps Execute Telecommand TtcConfigTmEncInUseLow1 TC Control Flags : GBM IL DSE -E- -- --- Subsch. ID : 10 Det. descr. : TTC: Config TM Enc In Use Mode Low 1,500 bps, TC(8,4,115,20)	DC12F170	Next Step: 12
TC Seq. Name :HRRT2L1F (Tx2 for LR1 final) TimeTag Type: Sub Schedule ID: <input type="checkbox"/>				
12		Verify setting Verify Telemetry TME_BITRATE DEMRF160	= 500 bps	Next Step: END AND=ZAZ7J999

Tx2 and TM encoder in use configuration for LR1
 File: H_CRP_TTC_T2L1.xls
 Author: E. Picallo



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
		Verify Telemetry BSW_TM_MODE DEMF0160	= OnlyFilteredVc	AND=ZAZ7J999
		Verify Low Rate-1 status Telemetry X2 LowRate-1 MD RMB51442	= ON	AND=ZAZ7I999
		Verify Coherent Mode status Telemetry X2 Coher MOD-CM RMB47442		AND=ZAZ7I999
		Verify Ranging Modulator status Telemetry X2 Rang MD - RM RMB48442		AND=ZAZ7I999
		Verify RNG Modulation Index Telemetry X2 RNGMD ID-RMI RMB53442	= 0.6 rad	AND=ZAZ7I999
End of Procedure				