

ACMS Reconfigure to STR2_OP, STR1_NONOP
 File: H_COP_AOC_7154.xls
 Author: dsalt-hp



Procedure Summary

Objectives

The objective of this Herschel ACMS commissioning procedure is to reconfigure STR2 as Main (STR1 as Redundant) in support of the STR functional checks.

The procedure involves the following activities:
 - change STR2 mode to ATFAD and declare as Main (calls H_FCP_AOC_80N2)

Summary of Constraints

To be executed in accordance with the Herschel commissioning plan and associated timeline

Spacecraft Configuration

Start of Procedure

S/C in SCM, STR2 in STB as STRR

End of Procedure

S/C in SCM, STR2 in ATFAD as STRM

Reference File(s)

Input Command Sequences

Output Command Sequences

Referenced Displays

ANDs GRDs SLDs


Configuration Control Information

DATE	FOP ISSUE	VERSION	MODIFICATION DESCRIPTION	AUTHOR	SPR REF
22/04/09	2.3	1	Created	dsalt-hp	

ACMS Reconfigure to STR2_OP, STR1_NONOP
File: H_COP_AOC_7154.xls
Author: dsalt-hp



Procedure Flowchart Overview

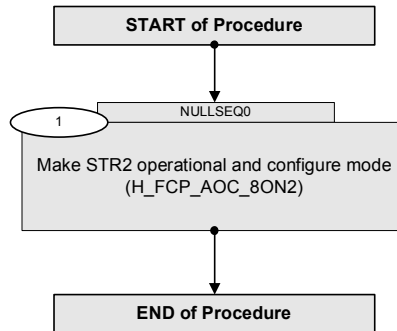

ACMS Reconfigure to STR2_OP, STR1_NONOP
 File: H_COP_AOC_7154.xls
 Author: dsalt-hp



Step No.	Time	Activity/Remarks	TC/TLM	Display/ Branch
Beginning of Procedure				
TC Seq. Name : NULLSEQ0 () TimeTag Type: Sub Schedule ID: <input type="checkbox"/>				
1		Make STR2 operational and configure mode (H_FCP_AOC_8ON2)		Next Step: END
		Execute selected steps of procedure H_FCP_AOC_8ON2 (Make STR2 operational and configure mode) to command STR2 in ATFAD and flagged as Main (STRM) - use Step 30 to command from STB to ATFAD - use Step 5 to configure STR2 as Main (N.B. delete TCs for STR1)		
		Execute Procedure: H_FCP_AOC_8ON2 Make STR2 operational and configure mode		
End of Procedure				